PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1704E386

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71169522 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-9522-02	*	**04 SIDE FEED**	**YSD-PO_25ENG_2017**	*







Anvil		
7116-9522XA		(N)
CW (c) 2,02	*CW (i)* 2,20	






Wire Crimper	
7116-9522XW	(1)
CW 2,00	

Insulation Crimper	
7116-9522XI	(1)
CW 2,20	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

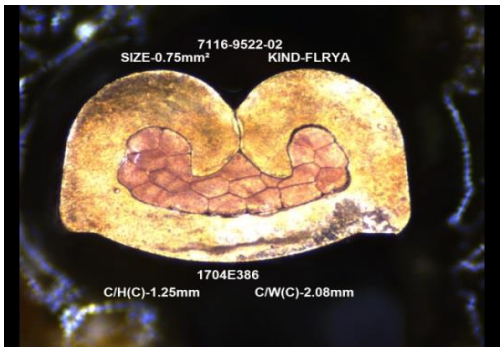
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.25	1.25	6.10
	+/-0.05		



	NOMINAL	AVERAGE	Cmk
mm	1.35	1.35	5.75
	+/-0.05		

REMARKS:

Aplicable Wire Range 0.50mm²~1.00mm²
The wire size 0.50mm² is not recommended due to crimping microcut conditions.
Wire 0.75mm² C/W(I)-2.27mm / Wire 1.00mm² C/W(I)-2.29mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 8124	PREPARED (Operator) nº 678
		
Date: 2017-mai-05	Date: 2017-mai-05	Date: 2017-mai-04

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1704E386

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0.75 mm^2

Nominal Cr. Height:	1.25	2.2	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.253	2.208
2	1.251	2.201
3	1.250	2.207
4	1.251	2.203
5	1.252	2.202
6	1.253	2.206
7	1.252	2.208
8	1.254	2.205
9	1.256	2.201
10	1.257	2.199
11	1.255	2.205
12	1.253	2.207
13	1.254	2.208
14	1.261	2.204
15	1.258	2.203
16	1.256	2.207
17	1.254	2.212
18	1.253	2.212
19	1.251	2.206
20	1.254	2.200
21	1.255	2.200
22	1.252	2.206
23	1.251	2.210
24	1.250	2.206
25	1.253	2.203
26	1.253	2.201
27	1.249	2.199
28	1.255	2.206
29	1.252	2.208
30	1.257	2.204
31	1.256	2.202
32	1.253	2.200
33	1.253	2.203
34	1.256	2.207
35	1.253	2.210
36	1.253	2.210
37	1.257	2.203
38	1.257	2.202
39	1.254	2.201
40	1.252	2.199
41	1.249	2.203
42	1.254	2.209
43	1.255	2.210
44	1.255	2.206
45	1.252	2.203
46	1.251	2.203
47	1.252	2.203
48	1.256	2.206
49	1.257	2.209
50	1.258	2.203
Average	1.25	2.20
Cmk	6.10	9.05

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1.35	2.4	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.352	2.408
2	1.355	2.402
3	1.352	2.405
4	1.355	2.401
5	1.355	2.398
6	1.352	2.405
7	1.352	2.408
8	1.356	2.405
9	1.358	2.413
10	1.354	2.407
11	1.351	2.404
12	1.354	2.402
13	1.358	2.406
14	1.354	2.408
15	1.352	2.404
16	1.359	2.399
17	1.358	2.398
18	1.356	2.408
19	1.355	2.401
20	1.353	2.399
21	1.355	2.407
22	1.359	2.401
23	1.358	2.401
24	1.354	2.399
25	1.350	2.405
26	1.350	2.408
27	1.355	2.409
28	1.355	2.403
29	1.351	2.402
30	1.351	2.414
31	1.353	2.405
32	1.354	2.403
33	1.357	2.401
34	1.355	2.400
35	1.354	2.398
36	1.352	2.398
37	1.355	2.403
38	1.357	2.407
39	1.360	2.401
40	1.356	2.401
41	1.354	2.405
42	1.351	2.411
43	1.351	2.412
44	1.354	2.405
45	1.358	2.402
46	1.356	2.399
47	1.353	2.398
48	1.351	2.397
49	1.349	2.403
50	1.353	2.405
Average	1.35	2.40
Cmk	5.75	7.66

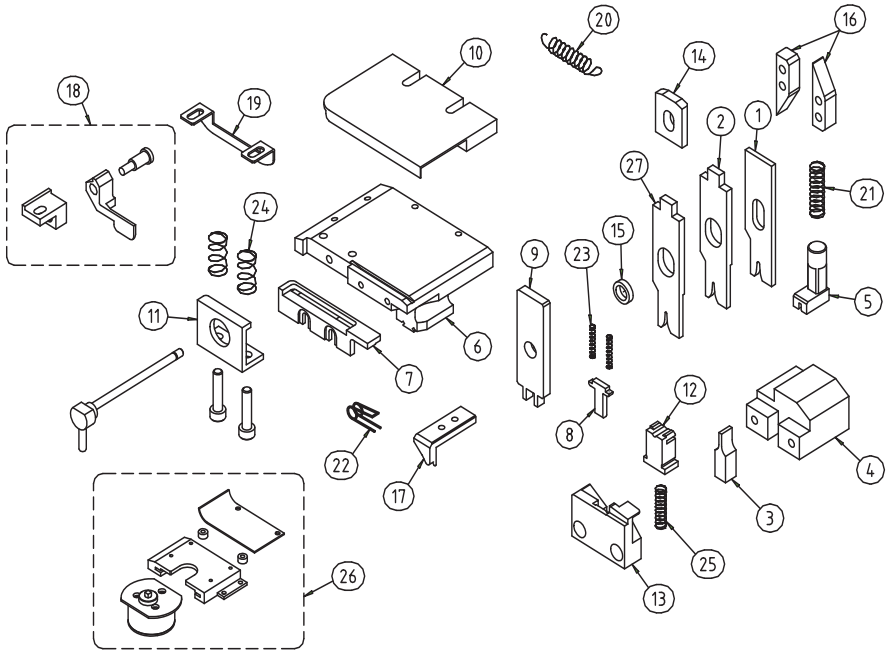
Acceptance criteria: Cmk>= 2

Cmk= {maximum of (AVERAGE-LOWER LIMIT) and (UPPER LIMIT-AVERAGE)} / 3 STD DEVIATION

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1674	TERMINAL No. 端子品番	7116-9522



No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
1	7116-9522XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ
2	7116-9522XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ
3	7116-9522XA		ANVIL ｱﾝﾋﾞﾙ
4	7116-9522XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ
5	7116-9522XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ
6	7116-9522XYB		BASE ﾍﾞｰｽ
7	7116-9522XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB
8	48A47016	001	WIRE HOLDER 電線押さえ
9	48A47017	001	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ
10	48A47020	A05	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ
12	48A47024	001	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ
13	48A47025	001/101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A19007	027	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ
15	48A19019	032	BUSH ﾌﾞｯｼｭ

No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
16	48A47014	001	FEEDING CAM 送りｶﾑ
17	48A47013		FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
23	48A19023	001	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
	7116-9522XKP		BRACKET ﾌﾞﾗｹｯﾄ
27	-		~~STABILIZER CRIMPER~~ ~~ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
	〈オプション OPTION〉		
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署	
PTC	
DESIGNED DATE 設計日	
2007/1/22	
APPROVED 承認	DESIGNED 設計
K,Hiraguchi	T,Suzuki
2007/1/22	2007/1/22

ISSUED 発行

ISSUE
2016/12/01
YAZAKI PARTS CO.,LTD.
HIB MACHINE
PRODUCT DEP.