PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1706E163

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71161909 SEQUENCE Nº 1

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-1909-02	**7158-3213-90**	**04 SIDE FEED**	**YSD-PO 26ENG/2017**	*







Anvil		
7116-1909DDXA		(N)
CW (c) 1,95	*CW (i)* 3,96	






Wire Crimper	
7116-1909DDXW	(1)
CW 1,93	

Insulation Crimper	
7116-1909DDXI	(1)
CW 3,96	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

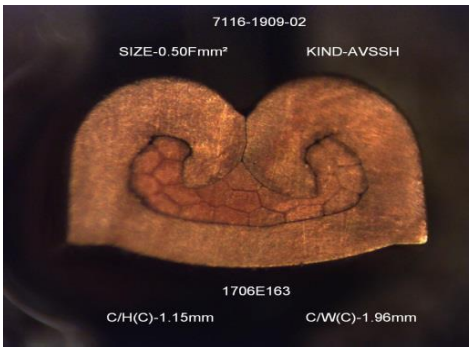
	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

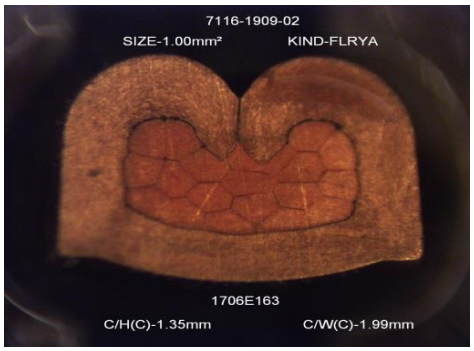
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.15	1.15	3.44
	+/-0.05		


	NOMINAL	AVERAGE	Cmk
mm	1.35	1.35	3.55
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm² ~ 1.00mm²
Wire 0.50mm² C/W(I)-4.05mm
Wire 1.00mm² C/W(I)-4.09mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18597
		Rui Domingues
Date: 2017-jun-27	Date: 2017-jun-27	Date: 2017-jun-27

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1706E163

LOWER WIRE KIND & SIZE

Wire kind: AVSSH

Total wire size: 0.5 mm^2

Nominal Cr. Height:	1.15	4	mm
+/-	0.05	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.150	4.008
2	1.153	4.001
3	1.151	4.005
4	1.151	4.002
5	1.152	4.002
6	1.150	3.997
7	1.152	3.996
8	1.155	4.001
9	1.155	4.003
10	1.157	4.003
11	1.151	3.994
12	1.159	3.995
13	1.149	3.998
14	1.147	4.003
15	1.151	3.994
16	1.152	4.006
17	1.159	3.998
18	1.163	3.999
19	1.157	3.992
20	1.162	3.999
21	1.158	4.007
22	1.164	4.006
23	1.151	4.001
24	1.153	4.008
25	1.152	3.999
26	1.151	3.999
27	1.151	4.000
28	1.151	4.002
29	1.159	3.999
30	1.147	4.003
31	1.149	4.002
32	1.151	4.000
33	1.150	3.997
34	1.154	4.002
35	1.155	3.998
36	1.155	4.002
37	1.149	4.000
38	1.144	4.008
39	1.144	4.005
40	1.154	3.997
41	1.152	4.006
42	1.156	3.997
43	1.150	3.990
44	1.160	4.006
45	1.154	4.000
46	1.149	4.002
47	1.157	3.995
48	1.158	3.989
49	1.160	3.989
50	1.152	3.989
Average	1.15	4.00
Cmk	3.44	6.67

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1.35	4.2	mm
+/-	0.05	0.1	mm

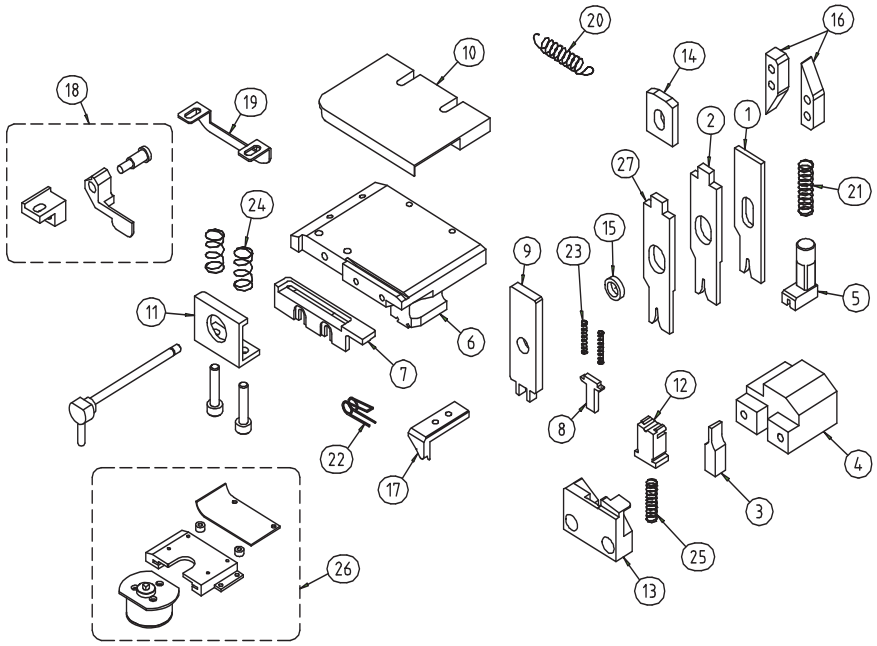
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1.353	4.199
2	1.347	4.202
3	1.349	4.201
4	1.350	4.201
5	1.351	4.199
6	1.351	4.205
7	1.346	4.202
8	1.347	4.208
9	1.350	4.214
10	1.351	4.202
11	1.354	4.203
12	1.359	4.203
13	1.352	4.198
14	1.351	4.198
15	1.351	4.202
16	1.351	4.205
17	1.360	4.203
18	1.345	4.204
19	1.341	4.199
20	1.361	4.205
21	1.360	4.203
22	1.347	4.198
23	1.360	4.198
24	1.354	4.203
25	1.360	4.197
26	1.350	4.200
27	1.353	4.205
28	1.356	4.196
29	1.353	4.192
30	1.351	4.192
31	1.358	4.200
32	1.353	4.199
33	1.358	4.204
34	1.360	4.191
35	1.354	4.198
36	1.348	4.204
37	1.348	4.200
38	1.346	4.210
39	1.348	4.207
40	1.351	4.212
41	1.352	4.206
42	1.351	4.210
43	1.352	4.203
44	1.347	4.208
45	1.355	4.211
46	1.352	4.210
47	1.352	4.203
48	1.353	4.206
49	1.351	4.202
50	1.349	4.201
Average	1.35	4.20
Cmk	3.55	6.56

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1410	TERMINAL No. 端子品番	7116-1909DD



No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
1	7116-1909XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ
2	7116-1909XID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ
3	7116-1909XAD		ANVIL ｱﾝﾋﾞﾙ
4	7116-1909XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ
5	7116-1909XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ
6	7116-1909XYB		BASE ﾍﾞｰｽ
7	7116-1909XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB
8	48A47016	002	WIRE HOLDER 電線押さえ
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ
10	48A47020	A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ
12	48A19049	002 ①	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ
13	48A47025	003 ①	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A19007	011 ②	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ
15	48A19019	032	BUSH ﾌﾞｯｼｭ
16	48A47014	001	FEEDING CAM 送りｶﾑ

No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
17	48A47013		FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
23	48A19023	001	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
	7116-1909XKP		BRACKET ﾌﾞﾗｹｯﾄ
27	-		~~STABILIZER CRIMPER~~ ~~ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
	〈オプション OPTION〉		
13	48A47025 ③	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A47042	-002 ②	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
③	2010/6/21	ｷｬﾘｱｶｯﾀｰ用ｱｳﾀｰｼｬｰ追加	QX7	Y.NOZAWA
②	2007/11/5	010→011, 003→002	QX7	T.Suzuki
①	2007/6/13	001→002, 002→003	QX7	T.Suzuki

APPRICATION POST 申請部署	
PTC	
DESIGNED DATE 設計日	
2007/3/30	
APPROVED 承認	DESIGNED 設計
K,Hiraguchi	T,Suzuki
2007/3/30	2007/3/30

ISSUE
2016/02/16
YAZAKI PARTS CO.LTD HAIBARA OFFICE

ISSUED 発行