PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1706E165

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164916 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-4916-02	7157-3345-40	MXDR	4514417508	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7116-4916-02	7116-4916-06		

Anvil			Wire Crimper			Insulation Crimper		
7116-4916XAD		(A)	7116-4916XW		(1)	7116-4916XID		(A2)
CW (c)	1.80	CW (i) 3.38	CW	1.78		CW	3.38	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.2 mm 0.2 - 0.6 mm	0.32		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.11		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.3 mm 0 - 0.3 mm	0.09		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 0.6 mm	0.28		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 10 °	2		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 0.4 mm	0.01		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable


(*) - Specified on Crimping Spec.


(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

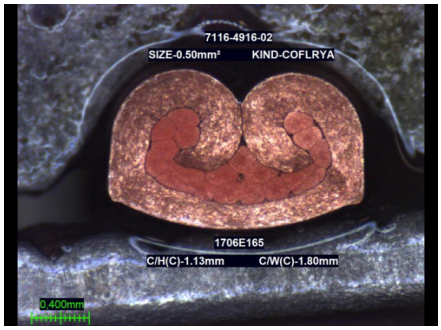

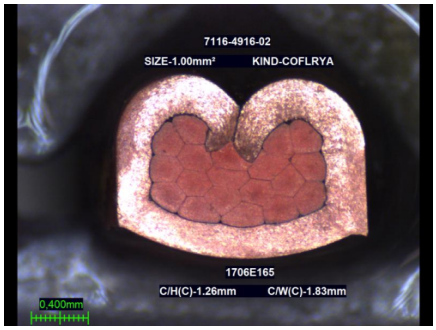

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.13	1.13	3.33
	+/- 0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.26	1.26	3.12
	+/- 0.05		

REMARKS:

Applicable wire range 0.50mm²~1.00mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº3485	CHECKED (Operator) nº18388	PREPARED (Operator) nº19147
	HELDER ROCHA	RAFAEL VALENTE
Date: 06/08/2026	Date: 06/08/2026	Date: 06/08/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°
1706E165

LOWER WIRE KIND & SIZE

C/W(I): 3.26 mm
Wire kind: COFLRYA
Wire size: 0.50 mm²
Nominal Cr. Height: 1.13 3.1 mm
+/- 0.05 0.1 mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.132	3.106
2	1.130	3.106
3	1.124	3.107
4	1.127	3.108
5	1.131	3.109
6	1.131	3.104
7	1.131	3.097
8	1.133	3.097
9	1.138	3.098
10	1.139	3.102
11	1.135	3.104
12	1.132	3.107
13	1.131	3.110
14	1.134	3.112
15	1.132	3.113
16	1.141	3.115
17	1.132	3.102
18	1.137	3.098
19	1.135	3.098
20	1.129	3.097
21	1.126	3.107
22	1.121	3.109
23	1.132	3.110
24	1.132	3.111
25	1.145	3.111
26	1.137	3.106
27	1.135	3.106
28	1.132	3.096
29	1.126	3.097
30	1.121	3.102
31	1.123	3.102
32	1.128	3.104
33	1.129	3.107
34	1.133	3.107
35	1.135	3.107
36	1.136	3.108
37	1.136	3.103
38	1.126	3.102
39	1.132	3.097
40	1.132	3.097
41	1.127	3.093
42	1.128	3.094
43	1.130	3.100
44	1.133	3.101
45	1.135	3.104
46	1.135	3.108
47	1.130	3.110
48	1.129	3.111
49	1.124	3.106
50	1.125	3.106
Average	1.13	3.10
Cmk	3.33	5.97

UPPER WIRE KIND & SIZE

C/W(I): 3.40 mm
Wire kind: COFLRYA
Wire size: 1.00 mm²
Nominal Cr. Height: 1.26 3.5 mm
+/- 0.05 0.1 mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.260	3.500
2	1.257	3.501
3	1.250	3.503
4	1.252	3.503
5	1.267	3.498
6	1.268	3.488
7	1.273	3.484
8	1.266	3.483
9	1.260	3.492
10	1.257	3.493
11	1.256	3.497
12	1.253	3.500
13	1.254	3.501
14	1.261	3.504
15	1.262	3.511
16	1.262	3.511
17	1.262	3.506
18	1.263	3.500
19	1.259	3.497
20	1.257	3.494
21	1.260	3.494
22	1.262	3.496
23	1.266	3.498
24	1.260	3.501
25	1.257	3.507
26	1.255	3.509
27	1.260	3.501
28	1.263	3.513
29	1.263	3.501
30	1.265	3.503
31	1.266	3.503
32	1.267	3.501
33	1.263	3.497
34	1.261	3.493
35	1.259	3.497
36	1.258	3.501
37	1.254	3.505
38	1.258	3.505
39	1.262	3.509
40	1.266	3.509
41	1.266	3.511
42	1.261	3.501
43	1.257	3.501
44	1.255	3.509
45	1.253	3.505
46	1.249	3.500
47	1.249	3.498
48	1.250	3.498
49	1.257	3.503
50	1.257	3.503
Average	1.26	3.50
Cmk	3.12	5.16


Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1600	TERMINAL No. 端子品番	7116-4916DD

共通品番	9116-1380DD	–	–	–
	–	–		

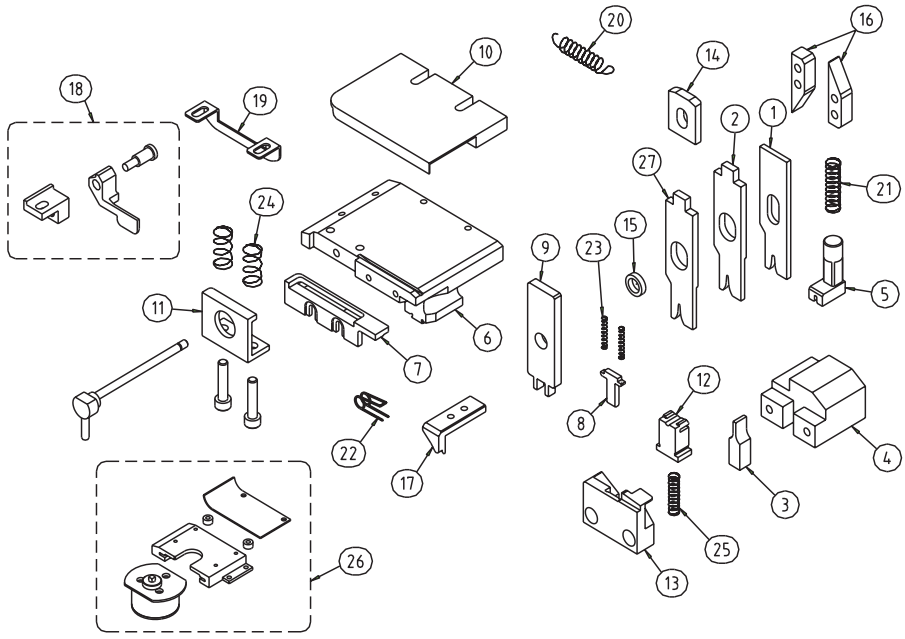

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-4916XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ
2	7116-4916XID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ
3	7116-4916XAD		ANVIL ｱﾝﾋﾞﾙ
4	7116-4916XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ
5	7116-4916XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ
6	7116-4916XYB		BASE ﾍﾞｰｽ
7	7116-4916XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB
8	48A47016	002	WIRE HOLDER 電線押さえ
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ
10	48A47020	A05	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ
12	48A19049	002 ①	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ
13	48A47025	003 ①②	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A19007	022	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ
15	48A19019	-023 ③	BUSH ﾌﾞｯｼｭ
16	48A47014	001	FEEDING CAM 送りｶﾑ

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
17	48A47013	001	FEEDING CLAW 送り爪
18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
21	48A47032	002 ②	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
	7116-4916XKP		BRACKET ﾌﾞﾗｹｯﾄ
27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
〈OPTION オプション〉			
13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
③	8/23/2012	020→023	12I-010	Y.NOZAWA
②	9/11/2007	002→003, 001→002	QX7	T,Suzuki
①	6/26/2007	001→002	QX7	T,Suzuki

APPRICATION POST 申請部署	
HIB	
DESIGNED DATE 設計日	
5/25/2007	
APPROVED 承認	DESIGNED 設計
K,Hiraguchi	T,Suzuki
5/25/2007	5/25/2007

ISSUED 発行

ISSUE
4/27/2018
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.