PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1706E166

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72950087 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7295-0087-02	*	MXSR	4514238586	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7295-0087-02	7295-0087-06		

Anvil			Wire Crimper			Insulation Crimper		
7295-0087XA		(N)	7295-0087XW		(N)	7295-0087XI		(N)
CW (c)	1.37	CW (i) 1.78	CW	1.35		CW	1.78	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.3 mm 0.3 - 0.7 mm	0.46		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.2		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.2 mm 0 - 0.2 mm	0.1		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0 - 0.4 mm	0.38		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	0.2		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 3 °	0.2		The body of the terminal is not twisted.	O

O - ok **X** - ng **NA** - not aplicable


(*) - Specified on Crimping Spec.


(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

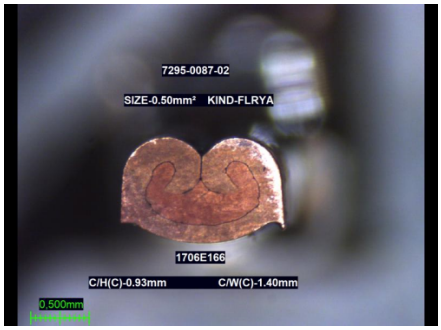

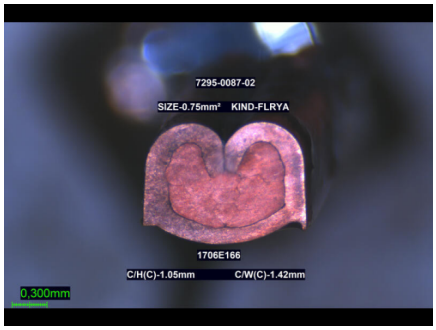

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.93	0.93	4.86
	+/- 0.03		

	NOMINAL	AVERAGE	Cmk
mm	1.05	1.05	5.78
	+/- 0.03		

REMARKS:

Aplicable wire range 0.50mm²~0.75mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº18388
Date: 18/09/2025	Date: 17/09/2025	Date: 17/09/2025

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

1706E166

LOWER WIRE KIND & SIZE

C/W(I): 1.83 mm

Wire kind: FLRYA0.3

Wire size: 0.5 mm^2

Nominal Cr. Height:	0.93	1.95	mm
+/-	0.03	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	0.932	1.951
2	0.933	1.947
3	0.927	1.955
4	0.932	1.948
5	0.932	1.954
6	0.932	1.948
7	0.932	1.947
8	0.932	1.946
9	0.932	1.947
10	0.927	1.955
11	0.933	1.946
12	0.932	1.947
13	0.932	1.947
14	0.927	1.955
15	0.933	1.946
16	0.932	1.951
17	0.932	1.947
18	0.932	1.955
19	0.932	1.951
20	0.933	1.955
21	0.932	1.948
22	0.932	1.947
23	0.933	1.948
24	0.932	1.954
25	0.927	1.955
26	0.932	1.946
27	0.932	1.947
28	0.933	1.955
29	0.932	1.954
30	0.932	1.946
31	0.932	1.947
32	0.927	1.948
33	0.932	1.955
34	0.932	1.951
35	0.932	1.947
36	0.927	1.951
37	0.932	1.955
38	0.933	1.946
39	0.932	1.947
40	0.933	1.946
41	0.932	1.955
42	0.932	1.949
43	0.932	1.947
44	0.927	1.951
45	0.933	1.955
46	0.932	1.951
47	0.932	1.947
48	0.927	1.955
49	0.933	1.954
50	0.932	1.946
Average	0.93	1.95
Cmk	4.86	9.34

UPPER WIRE KIND & SIZE

C/W(I): 1.89 mm

Wire kind: FLRYA

Wire size: 0.75 mm^2

Nominal Cr. Height:	1.05	2.1	mm
+/-	0.03	0.1	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.051	2.100
2	1.052	2.107
3	1.047	2.096
4	1.049	2.097
5	1.050	2.100
6	1.051	2.107
7	1.052	2.096
8	1.049	2.097
9	1.052	2.107
10	1.051	2.100
11	1.052	2.103
12	1.047	2.097
13	1.052	2.096
14	1.050	2.100
15	1.052	2.107
16	1.051	2.097
17	1.052	2.107
18	1.052	2.100
19	1.051	2.107
20	1.050	2.103
21	1.052	2.107
22	1.050	2.097
23	1.052	2.107
24	1.051	2.107
25	1.052	2.100
26	1.047	2.097
27	1.050	2.103
28	1.051	2.097
29	1.047	2.100
30	1.052	2.107
31	1.049	2.107
32	1.052	2.100
33	1.047	2.097
34	1.052	2.103
35	1.048	2.107
36	1.052	2.100
37	1.052	2.097
38	1.051	2.103
39	1.047	2.100
40	1.052	2.097
41	1.051	2.097
42	1.048	2.107
43	1.052	2.100
44	1.051	2.107
45	1.049	2.103
46	1.050	2.100
47	1.052	2.107
48	1.050	2.097
49	1.051	2.100
50	1.052	2.107
Average	1.05	2.10
Cmk	5.78	7.91

Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-5834	TERMINAL No. 端子品番	7295-0087
Common PN 共通品番	–	–	–
	–	–	

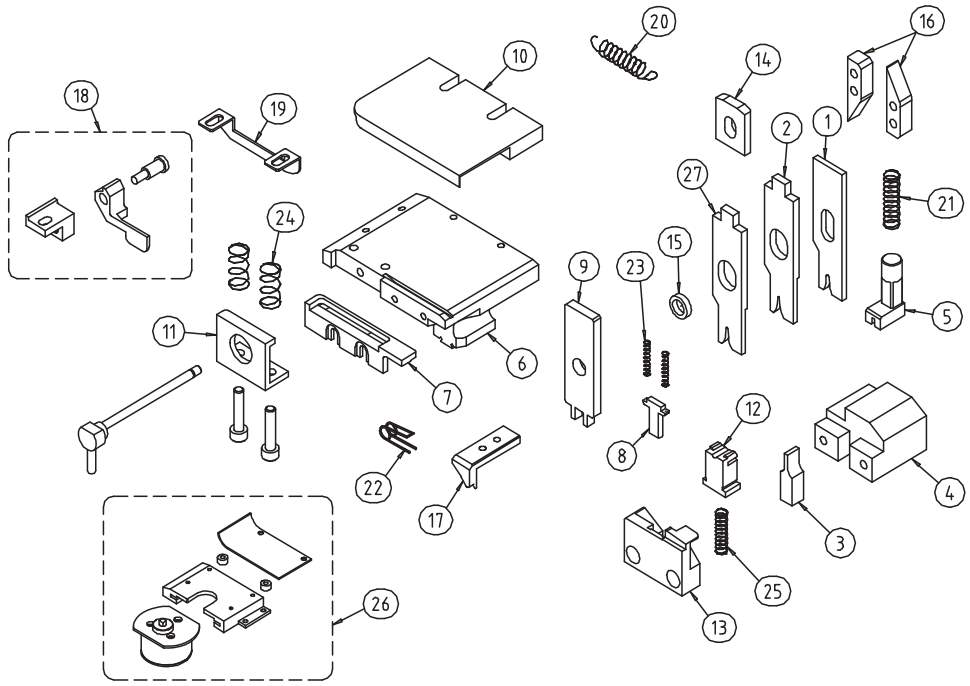

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7295-0087XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	-001	FEEDING CLAW 送り爪
2	7295-0087XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7295-0087XA		ANVIL アンビル	19	48A19047	-002	TERMINAL SCRAPER 端子掻き落とし
4	7295-0087XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7295-0087XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7295-0087XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7295-0087XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-003①	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャープレードスプリング
10	48A47020	-A03	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ		7295-0087XKP		BRACKET ブラケット
12	48A47024	-001	SHEARBLADE シャープレード	27	~~7295-0087XQ~~		~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	-002	OUTER SHEARBLADE アウターシャープレード	〈OPTION オプション〉			
14	48A19007	-022	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャープレード
15	48A19019	-019	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-001	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					YTU-FIAT		REVISED
					DESIGNED DATE 設計日		
					2014/1/13		ISSUE 2016/12/20 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP
					APPROVED 承認	DESIGNED 設計	
①	2016/6/17	CUTTING PUNCH 002→003	16F-110	A.YAMADA	H.HASEGAWA	C.Almeida	
					2015/6/18	2014/1/13	