PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
L110456

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72096063 SEQUENCE Nº 9






Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7209-6063-0W	*	**RSYP6451-J_M**	**YSD-3500222897**	*

Anvil		
7209-6063KAM		(N)
CW (c) 4,02	*CW (i)* 4,70	


Wire Crimper	
7209-6063KWM	(N)
CW 4,00	

Insulation Crimper	
7209-6063KIM	(N)
CW 4,70	

1 - VISUAL CHECK ITEMS

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

O - ok **X** - ng **NA** - not aplicable


	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



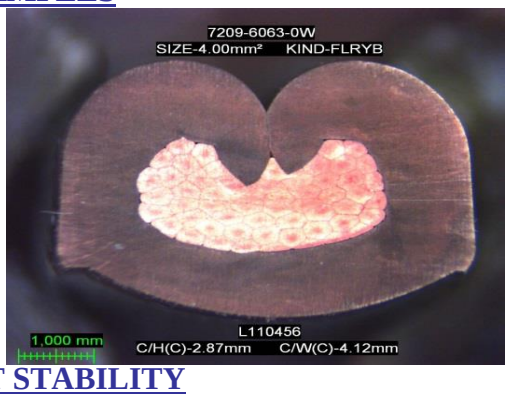

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	2,5	2,51	2,24
	+/-0,05		

	NOMINAL	AVERAGE	Cmk
mm	2,87	2,88	2,66
	+/-0,05		

REMARKS:

Aplicable wire rnge 2.00mm²~4.00mm².
Size 2.00mm² C/W(I)-4.65mm
Size 4.00mm² C/W(I)-4.80mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
		Jitor Hugo
Date: 2021/out/04	Date: 2021/set/30	Date: 2021/set/29

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
L110456

LOWER WIRE KIND & SIZE

Wire kind: AVSS

Wire size: 2F mm²

Nominal Cr. Height:	2,5	4,25	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,503	4,260
2	2,502	4,256
3	2,505	4,257
4	2,506	4,257
5	2,502	4,263
6	2,497	4,258
7	2,500	4,253
8	2,506	4,257
9	2,510	4,259
10	2,501	4,252
11	2,499	4,251
12	2,509	4,252
13	2,504	4,249
14	2,500	4,255
15	2,508	4,256
16	2,513	4,255
17	2,502	4,251
18	2,502	4,249
19	2,508	4,256
20	2,512	4,254
21	2,512	4,249
22	2,502	4,246
23	2,505	4,256
24	2,511	4,258
25	2,511	4,255
26	2,515	4,250
27	2,506	4,257
28	2,504	4,260
29	2,502	4,250
30	2,512	4,258
31	2,515	4,257
32	2,504	4,248
33	2,506	4,246
34	2,514	4,252
35	2,507	4,260
36	2,517	4,251
37	2,519	4,249
38	2,507	4,248
39	2,505	4,256
40	2,515	4,255
41	2,521	4,247
42	2,516	4,253
43	2,508	4,259
44	2,511	4,258
45	2,520	4,250
46	2,508	4,259
47	2,511	4,259
48	2,520	4,264
49	2,520	4,259
50	2,511	4,251
Average	2,51	4,25
Cmk	2,24	7,10

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 4 mm²

Nominal Cr. Height:	2,87	4,6	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,871	4,606
2	2,872	4,600
3	2,878	4,606
4	2,878	4,608
5	2,872	4,602
6	2,880	4,607
7	2,884	4,611
8	2,876	4,604
9	2,873	4,597
10	2,880	4,596
11	2,883	4,602
12	2,877	4,606
13	2,871	4,608
14	2,875	4,602
15	2,882	4,600
16	2,881	4,607
17	2,871	4,610
18	2,871	4,602
19	2,879	4,603
20	2,882	4,609
21	2,881	4,609
22	2,873	4,597
23	2,869	4,594
24	2,880	4,604
25	2,883	4,607
26	2,873	4,605
27	2,871	4,597
28	2,869	4,596
29	2,881	4,608
30	2,887	4,609
31	2,878	4,606
32	2,871	4,611
33	2,877	4,600
34	2,879	4,603
35	2,884	4,597
36	2,886	4,604
37	2,875	4,610
38	2,878	4,599
39	2,872	4,592
40	2,878	4,591
41	2,885	4,602
42	2,887	4,607
43	2,871	4,608
44	2,873	4,592
45	2,881	4,603
46	2,886	4,600
47	2,885	4,605
48	2,877	4,608
49	2,874	4,604
50	2,884	4,607
Average	2,88	4,60
Cmk	2,66	6,14

Acceptance criteria: Cmk>= 2,0

END

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

CLIENT	MODEL		S/N	MAP
YAZAKI SALTANO DE OVAR, P.E. LDA	RSYP6451-J_M		L 110456	
	Cod. KIT: K	K014462		
ORDER	TERMINAL TO BE CRIMPED			A#
4512858050	7209-6063-0W			

APPLICATOR SETUP

SETUP L.D.P. (mm.)=	190,00	STROKE	35 (mm)		MECAL	S.C.	S.T.M.	Note
Load Cal. (Kg.) =	850			Specification		X		
		Setup	Fixing. Ref.▼	Terminal Samples		X		
POSITIVE CAM (Terminal present)		X	C	Wire Samples		X		
NEGATIVE CAM (Terminal absent)			B	Housing Samples				
			Fixing. Ref.▲	Seal Samples				

Applicounter	No
Mobile Ejector	No
Carrier strip to be cut	Yes

FEEDING POINT OF THE TERMINAL

Hole	Slot	Wire wing	Insulation wing	Other
X				


Automatic machine

CMK	Crimp Height	Pull Force	Section	Photo
			2,00	X

Setup on

	Mod.	S/N
Press	P107C	42877
Stripper		

Strip length = (mm)




CRIMPING

WIRE	INSULATION	BARREL
 F	 C	
Profile dimension	Profile dimension	Profile dimension
Wire C. Profile Width (mm.) 4,00 (toll. +) 0,02	Insulation C. Profile Width (mm.) 4,7 (toll. +) 0,02	Barrel C. Profile Width (mm.) (toll. +)


WIRE CHARACTERISTICS — CRIMPING DIMENSIONS (mm.)

SECTION	COMPOSITION		Insulation	CONDUCTOR				INSULATION				BARREL			Pull Force	Crimp Force
					Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		Required HEIGHT ±	Required WIDTH ±	Measured WIDTH	Required HEIGHT ±	Required WIDTH ±	Measured WIDTH		
mm²	Nb	Ø	Ø	Index Wire	0,05			Index Insulation	0,10						Toll. ± 2 % (N.)	C.F.A. (KN.)
3,70 Sez. reale																
4,00 FLRYB	56	0,29	3,50	1,64	2,87		4,13	1,39	4,70		4,84				600	13,26
1,98 Sez. reale																
2,00 FLRYB	30	0,29	2,50	1,78	2,70		4,10	1,48	4,36		4,72				350	12,19

CHECK



Description		Rif.	
Bent left or right (max)	3°	A	OK
Bent up or down (max)	3°	B	OK
Torsion (max)	3°	C	OK



Description		Rif.	Test
Bellmouth	(0.2-0.5)	D	OK
Cut-off (max)	0.5	E	OK
Wire overlay(min.)	0.5	F	OK


DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
17/8/2021	*Valinotto*	*P.Bruno*	*Zatti*

N.B.: MECAL affirms that the MECAL tool is in accordance with the above mentioned characteristics.

QUALITY AND TECHNICAL DATA CERTIFICATE FOR APPLICATOR

YAZAKI SALTANO DE OVAR, P.E. LDA | **WIRE** | **RSYP6451-J_M** | **110456**

	Terminal
	7209-6063-0W
Wire Section.	2,00
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

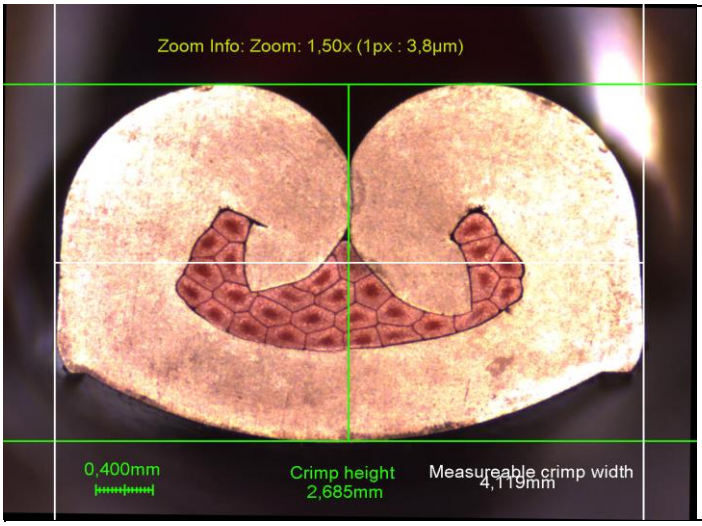

	Terminal
	7209-6063-0W
Wire Section.	2,00
CH. (mm.)	2,70
C.W. (mm.)	4,10
Material Compression (%)	24,0
Wire Compression	
Terminal Compression	

	Terminal
	7209-6063-0W
Wire Section.	2,00
CH. (mm.)	
C.W. (mm.)	
Material Compression (%)	
Wire Compression	
Terminal Compression	

DATE	OPERATOR SIGNATURE	CONTROLLER SIGNATURE	QUALITY RESPONSIBLE
17/8/2021	*Valinotto*	*P.Bruno*	*Zatti*

MECAL	DISTINTA COMPONENTI - PARTS LIST - BESTANDTEILELIST

DATA	17/08/2021
MODELLO	
MODEL	RSYP6451-J_M
TYPE	
MODELE	
TERMINALE	
TERMINAL	7209-6063-0W
KONTAKT	
COSSE	
MATRICOLA	
SERIAL NUM	L 110456
REGISTRIERNUMMER	
MATRICULE	

CODICE	Qt.	Rif
870550004	1	110
601051006	1	130
600052010	1	150
911190000	1	160
911070012	1	170
840010014	1	180
600030016	3	190
790400003	1	200
790340005	1	210
790420004	1	220
790340003	5	230
790340002	1	235
791640006	1	242
P0138	0,5	245
911110013	1	260
991130001	1	265
991320003	1	280
870620001	1	295
880480008	1	300
871980007	1	310
990400003	1	315
600061016	2	360
601058012	1	370
600050010	1	380
640060020	2	390
991290010	1	400
991290016	1	405
600050014	4	410
610110308	1	420
600041006	1	450
650242004	2	460
991350000	1	480
990010015	1	530
600050012	2	560
620081030	1	570
600052010	1	580
911090007	1	590
991160033	2	670
600050020	1	680
610101005	1	690


CODICE	Qt.	Rif
95127 0207	1	001
91112 0040	1	100
99101 0039	1	120
95127 0047	1	140
99132 0007	1	240
99128 0008	1	250
91103 0043	1	290
91117 0007	1	320
91118 0115	1	330
60005 0030	1	340
91125 0087	1	350
88146 0018	1	355
88146 0019	1	362
60004 0006	4	365
91106 0117	1	430
91105 0018	1	440
99017 0000	1	470
62008 5230	1	490
99131 0001	1	550
91108 0050	1	600
91011 0000	2	610
91124 0686	1	620
60004 0012	1	621
99126 0028	1	622
91116 0027	1	623
91122 0003	1	630
60003 0006	2	640
91148 0652	1	650
60004 1010	2	660
Personal. **L_0084-R**		
98146 3133	**1**	**1000**
98145 2821	**1**	**1010**
99141 0300	1	1019
99951 0690	1	1030
91130 0472	1	1040
60008 1025	1	1055
60004 0010	1	1058
98127 4445	**1**	**1060**
91134 0106	**1**	**1070**
91133 0108	**1**	**1075**
91035 0002	1	1080
20108 0061	1	1082
60003 0008	1	1085
60004 0025	2	1090
99150 0300	1	1102
91143 0342	1	1105
91145 0014	1	1120
91137 0464	**1**	**1190**
60003 0008	1	1195
91138 0123	**1**	**1200**
91035 0002	1	1210
20108 0061	1	1215
91140 0102	1	1230
60003 0006	2	1240
60004 0016	2	1250
60004 0016	2	1260
99147 0366	1	1280
99150 0850	1	1290
61010 1004	1	1291


REV	DATE	DESCRIPTION	REQUIRED	FITMENT


Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069


L_BLK00-RYP


ATTENZIONE: la protezione in gomma (rif. 295) tra le ghiere ed il corpo del miniapplicatore deve essere rimossa prima dell' utilizzo dell' attrezzo.
ATTENTION: the rubber protection (ref. 295) between the ram and the applicator it must be removed before using.

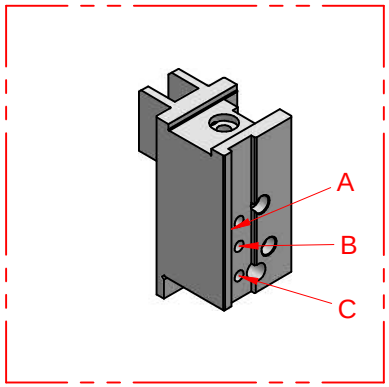













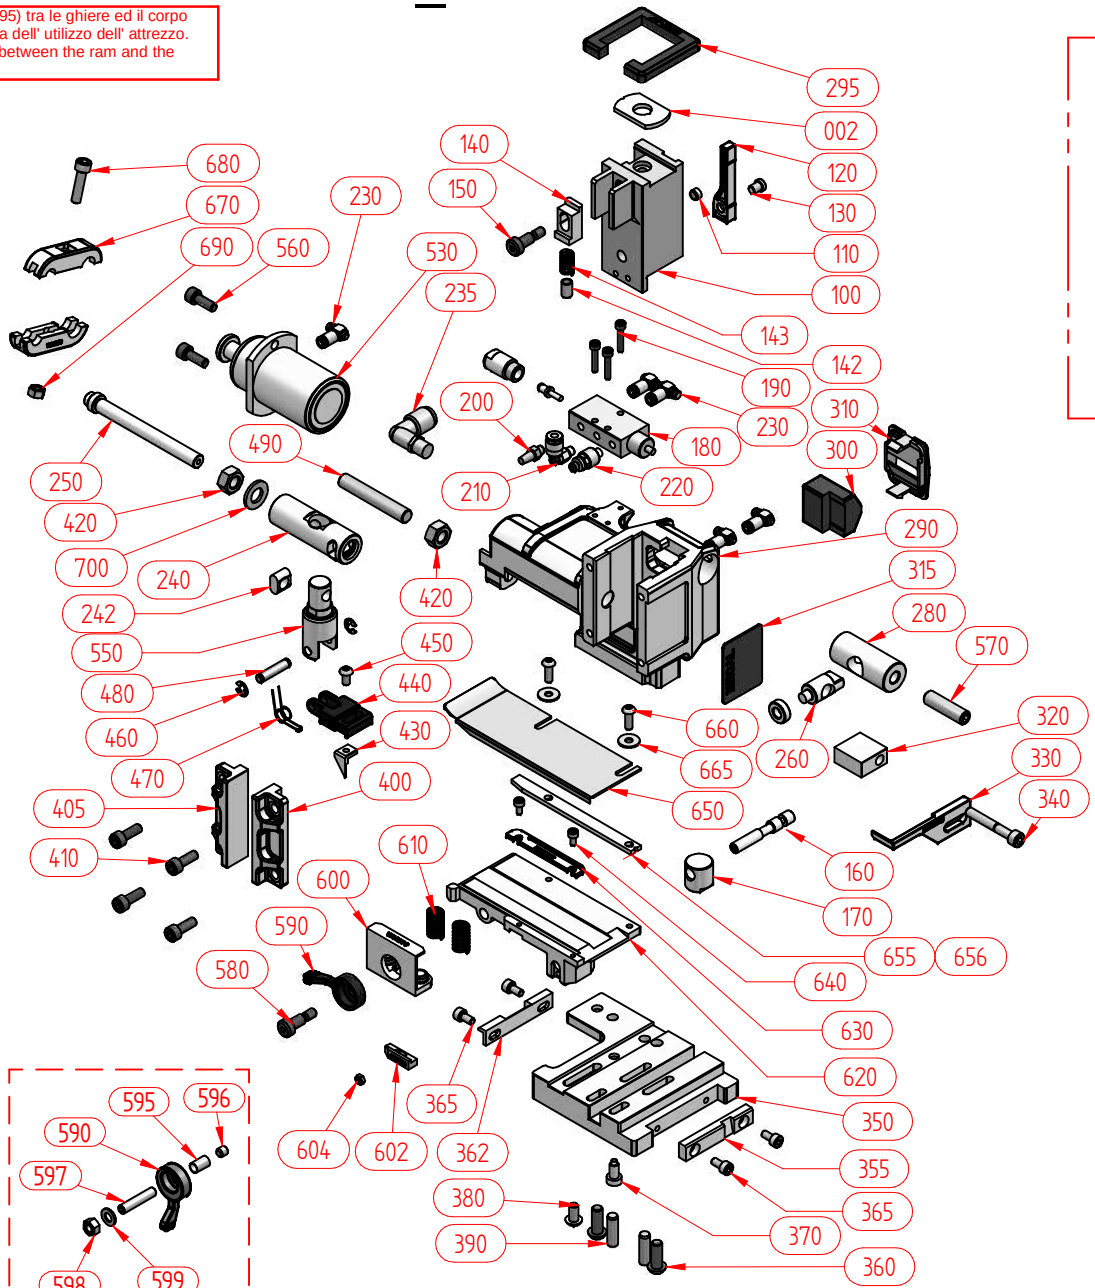

001 GHIERA TIPO "J" "COMBI"

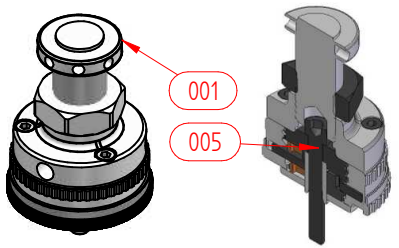


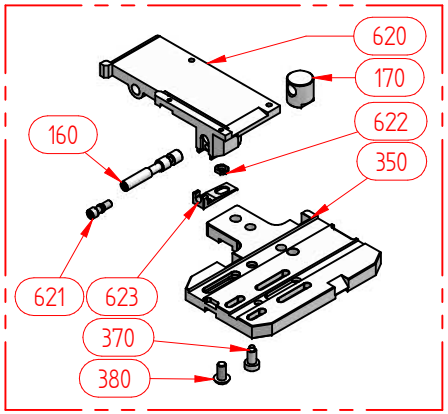

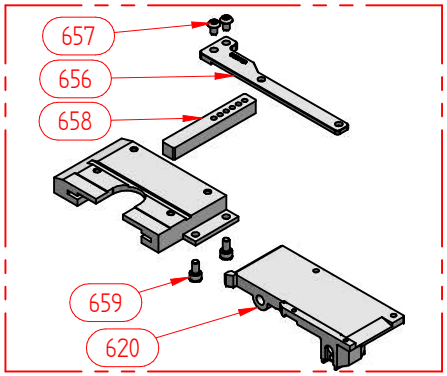

Mecal Srl
Sede legale e Stab.: Strada per Felizzano, 18 - 15043 Fubine (Al)
Tel. (0131) 792792 - Fax (0131) 792733/792734Cap. Soc. € 500.000 int.vers.
Registro delle Imprese di Alessandria n. 11690 - CCIAA Alessandria - REA N. 153887 - N. Meccanografico AL002563
Codice Fiscale 01328270069 - Codice ISO: IT - Partita Iva: 01328270069

L_0084-R

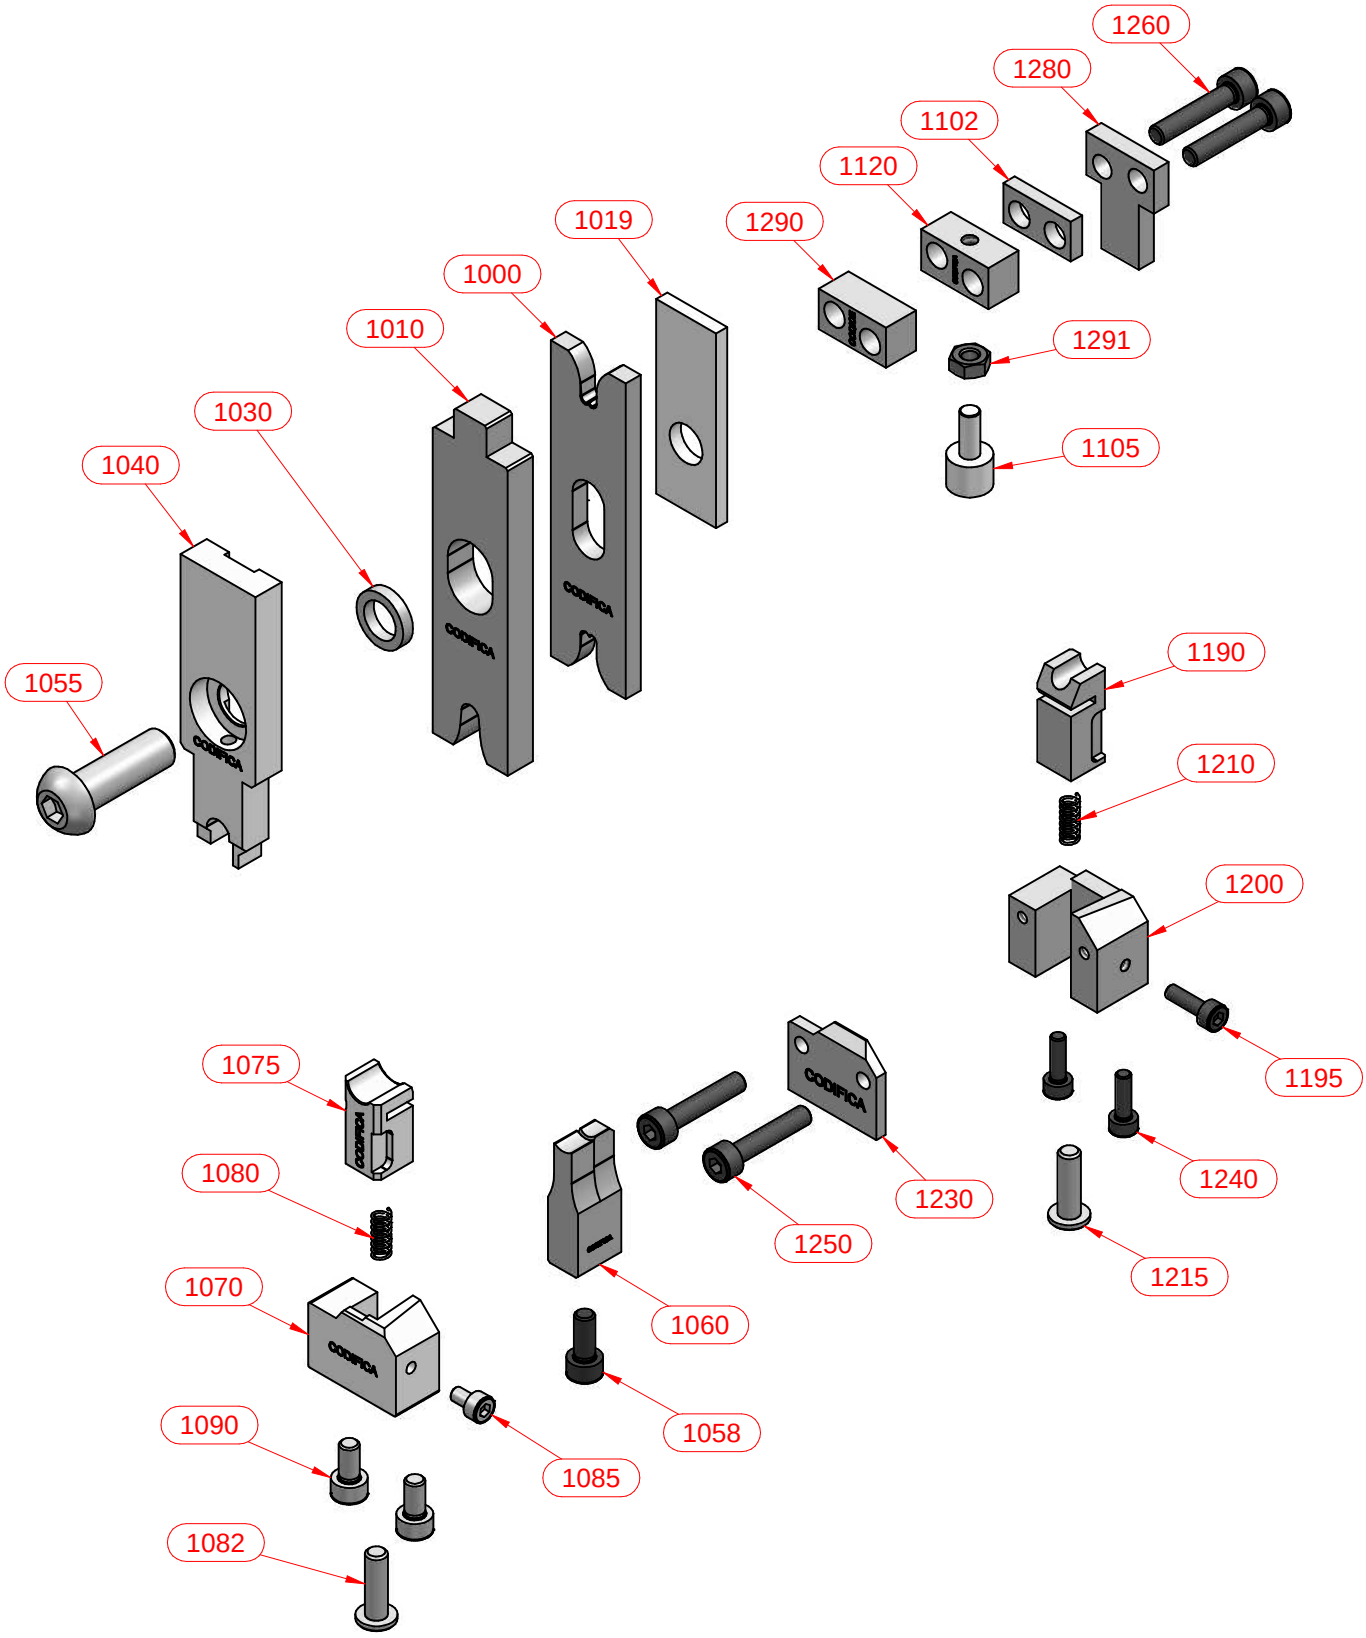

Dichiarazione di incorporazione
Declaration of incorporation

(All. IIB Dir. 2006/42/CE)

Il fabbricante
The manufacturer

Mecal s.r.l. Strada per Felizzano, 18
15043 Fubine (AL) Italia

dichiara
declares

(seguendo la procedura di valutazione della conformità secondo Art.13 Dir. 2006/42/CE)

che la quasi macchina
the partly completed machinery

Miniapplicatore - Stampo Mod. RSYP6451-J_M Matr. L110456 anno 2021

Applicatore e stampo per l'aggraffatura di terminali metallici su cavi conduttori

Applica e rispetta i requisiti essenziali di sicurezza
1.1.1 – 1.1.3 –1.3.4 della direttiva 2006/42/CE all I
e la documentazione tecnica pertinente è stata compilata in conformità allegato VIIB

It applies and fulfill the essential safety requirements 1.1.1 - 1.1.3 - 1.3.4 - of Directive 2006/42/CE annex 1 and the related technical documentation has been compiled in accordance with part B of annex VII

Ci impegniamo a trasmettere, in risposta da una richiesta adeguatamente motivata delle autorità nazionali, informazioni pertinenti su miniapplicatori / stampi (quasi macchine) in formato digitalizzato

Si dichiara il divieto della messa in servizio di tutti gli applicatori e stampi MECAL definiti "quasi macchine" prima che le macchine sulle quali vengono incorporate siano state dichiarate conformi alle disposizioni della direttiva 2006/42/CE

It is expressely prohibited to put in use all MECAL applicator - defined "partly completed machines" before that the machines hosting the mentioned Mecal applicators are confirmed in compliance with Directive 2006/42/CE

e autorizza
and authorizes

Claudio Aluffo - Str. Per Felizzano,18, 15043 Fubine (AL) Italia

a costituire il fascicolo tecnico
to compile the technical file

luogo e data 18/08/2021
place and date

Fubine

Mecal s.r.l.
Claudio Aluffo

