APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
L94334

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71165625 SEQUENCE Nº 9







Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-5625-02	**7158-3713-70**	**LMY5010-JGB_M**	**YSD-3500095365**	*

Anvil		
7116-5625DAPM/7116-5625DANM		(N)
CW (c) 7,12	*CW (i)* 10,90	




Wire Crimper		
7116-5625DWM		(N)
CW 7,10		

Insulation Crimper		
7116-5625DIDM		(N)
CW 10,90		

1 - VISUAL CHECK ITEMS

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

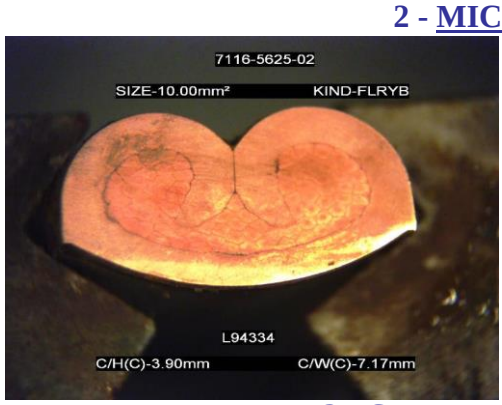
O - ok **X** - ng **NA** - not aplicable

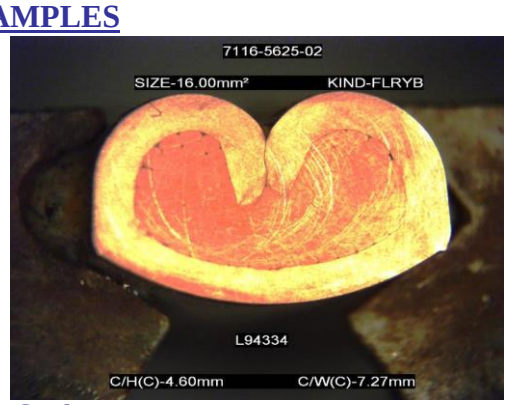
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	3,9	3,90	3,38
	+/-0,05		

	NOMINAL	AVERAGE	Cmk
mm	4,6	4,60	3,06
	+/-0,05		

REMARKS:

Aplicable wire range 10.00mm² ~16.00mm²
Wire 10.00mm² C/W(I)-10.82mm
Wire 16.00mm² C/W(I)-10.87mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18597
		Rui Domingues
Date: 2018-dez-14	Date: 2018-dez-14	Date: 2018-dez-13

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
L94334

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 10 mm²

Nominal Cr. Height:	3,9	9,8	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	3,897	9,800
2	3,890	9,802
3	3,889	9,802
4	3,895	9,802
5	3,897	9,804
6	3,899	9,799
7	3,895	9,800
8	3,895	9,805
9	3,903	9,803
10	3,897	9,803
11	3,903	9,801
12	3,906	9,801
13	3,907	9,809
14	3,900	9,802
15	3,900	9,804
16	3,905	9,801
17	3,903	9,807
18	3,905	9,796
19	3,897	9,811
20	3,897	9,814
21	3,903	9,801
22	3,902	9,795
23	3,901	9,795
24	3,904	9,794
25	3,899	9,805
26	3,901	9,806
27	3,901	9,798
28	3,903	9,800
29	3,898	9,796
30	3,901	9,797
31	3,905	9,794
32	3,897	9,804
33	3,898	9,795
34	3,902	9,797
35	3,898	9,807
36	3,899	9,803
37	3,900	9,793
38	3,900	9,800
39	3,899	9,800
40	3,899	9,803
41	3,901	9,794
42	3,896	9,805
43	3,900	9,801
44	3,900	9,801
45	3,879	9,805
46	3,891	9,798
47	3,895	9,802
48	3,895	9,801
49	3,897	9,806
50	3,898	9,801
Average	3,90	9,80
Cmk	3,38	7,32

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 16 mm²

Nominal Cr. Height:	4,6	10	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	4,603	10,000
2	4,601	10,002
3	4,596	10,003
4	4,602	9,994
5	4,598	9,993
6	4,597	10,002
7	4,611	10,000
8	4,600	10,000
9	4,598	9,999
10	4,594	9,999
11	4,598	10,004
12	4,592	10,001
13	4,592	10,002
14	4,600	9,997
15	4,599	10,003
16	4,601	10,000
17	4,599	9,996
18	4,608	9,998
19	4,599	9,998
20	4,601	10,001
21	4,602	10,002
22	4,598	10,003
23	4,601	10,002
24	4,601	10,001
25	4,601	9,999
26	4,601	10,002
27	4,599	9,998
28	4,598	9,983
29	4,596	9,996
30	4,603	10,008
31	4,597	10,003
32	4,597	10,002
33	4,600	10,001
34	4,600	10,001
35	4,600	10,005
36	4,595	10,008
37	4,602	10,010
38	4,591	10,002
39	4,587	10,002
40	4,583	10,007
41	4,581	10,007
42	4,593	10,007
43	4,595	10,006
44	4,595	10,006
45	4,595	10,006
46	4,595	10,002
47	4,597	10,001
48	4,601	9,999
49	4,601	10,002
50	4,601	10,001
Average	4,60	10,00
Cmk	3,06	7,43

Acceptance criteria: Cmk>= 2,0

END