APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
L94349

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71165452 SEQUENCE Nº 9






Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-5452-02	*	**RSYP5207-JS_M**	**YSD-3500095360**	*

Anvil		
7116-5452KACM		(N)
CW (c) 3,98	*CW (i)* 4,73	







Wire Crimper		
7116-5452KWM		(N)
CW 3,96		

Insulation Crimper		
7116-5254KICM		(1)
CW 4,73		

1 - VISUAL CHECK ITEMS

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

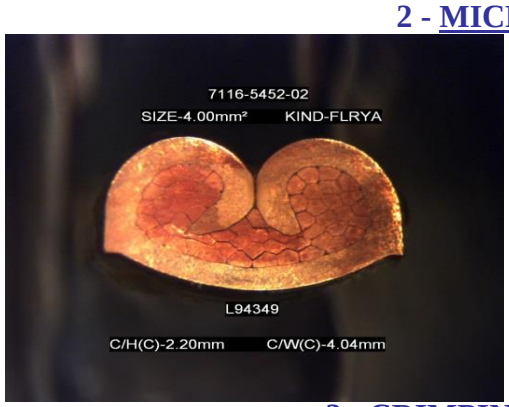
O - ok **X** - ng **NA** - not aplicable

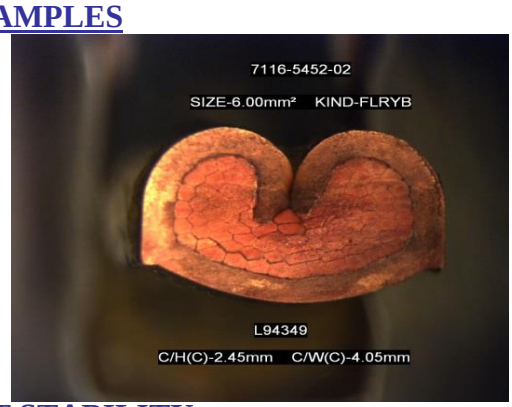
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	2,2	2,21	4,20
	+/-0,05		

	NOMINAL	AVERAGE	Cmk
mm	2,45	2,45	4,23
	+/-0,05		

REMARKS:

Aplicable wire range 4.00mm²~6.00mm²
Wire 4.00mm² C/W(I)-4.80mm
Wire 6.00mm² C/W(I)-4.85mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2018-nov-22	Date: 2018-nov-21	Date: 2018-nov-19

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
L94349

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 4 mm²

Nominal Cr. Height:	2,2	4,4	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,206	4,403
2	2,203	4,400
3	2,207	4,403
4	2,202	4,404
5	2,206	4,403
6	2,206	4,401
7	2,204	4,399
8	2,205	4,405
9	2,207	4,407
10	2,206	4,407
11	2,207	4,407
12	2,207	4,405
13	2,204	4,401
14	2,203	4,402
15	2,199	4,413
16	2,200	4,413
17	2,207	4,405
18	2,207	4,401
19	2,201	4,403
20	2,202	4,405
21	2,201	4,407
22	2,201	4,404
23	2,203	4,401
24	2,203	4,403
25	2,201	4,406
26	2,205	4,404
27	2,199	4,408
28	2,197	4,401
29	2,206	4,409
30	2,203	4,409
31	2,202	4,406
32	2,207	4,411
33	2,205	4,412
34	2,207	4,412
35	2,204	4,399
36	2,205	4,399
37	2,207	4,407
38	2,206	4,403
39	2,210	4,403
40	2,204	4,405
41	2,210	4,404
42	2,214	4,404
43	2,212	4,404
44	2,203	4,404
45	2,208	4,403
46	2,212	4,405
47	2,207	4,405
48	2,210	4,403
49	2,208	4,405
50	2,210	4,397
Average	2,21	4,40
Cmk	4,20	8,76

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 6 mm²

Nominal Cr. Height:	2,45	4,85	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2,451	4,850
2	2,450	4,850
3	2,451	4,853
4	2,452	4,854
5	2,450	4,855
6	2,449	4,851
7	2,451	4,852
8	2,451	4,850
9	2,451	4,853
10	2,446	4,850
11	2,449	4,853
12	2,449	4,852
13	2,450	4,852
14	2,450	4,852
15	2,449	4,854
16	2,449	4,855
17	2,448	4,851
18	2,452	4,850
19	2,450	4,850
20	2,450	4,850
21	2,450	4,849
22	2,452	4,854
23	2,452	4,855
24	2,453	4,853
25	2,455	4,854
26	2,454	4,851
27	2,454	4,850
28	2,457	4,856
29	2,457	4,857
30	2,458	4,860
31	2,462	4,860
32	2,459	4,858
33	2,461	4,856
34	2,460	4,857
35	2,457	4,858
36	2,463	4,854
37	2,451	4,854
38	2,451	4,859
39	2,451	4,846
40	2,451	4,860
41	2,451	4,845
42	2,451	4,844
43	2,452	4,863
44	2,449	4,846
45	2,452	4,853
46	2,450	4,851
47	2,451	4,853
48	2,453	4,852
49	2,453	4,848
50	2,452	4,854
Average	2,45	4,85
Cmk	4,23	8,12

Acceptance criteria: Cmk>= 2,0

END