PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE



# APPLICATOR VALIDATION REPORT

**(Spec. YEL-RP-02-0004)**

| Applicator Serial Nº |
|---|
| S2587 |

***TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70041285 SEQUENCE Nº*** 9

| Terminal Nº | Rubber Seal | Applicator Type | Purchasing Order Nº | Project / Model |
|---|---|---|---|---|
| **7004-1285-02** | * | **MSES254-ZF** | **YSD-PO 25ENG/2017** | * |






| Anvil | | |
|---|---|---|
| 7004-1285MDAN | | (N) |
| *CW (c)* 8.50 | *CW (i)* | |






| Wire Crimper | | |
|---|---|---|
| 7004-1285MDW | | (N) |
| *CW* 8.50 | | |

| Insulation Crimper | |
|---|---|
| | |
| *CW* | |

## 1 - VISUAL CHECK ITEMS

**O** - ok **X** - ng **NA** - not aplicable

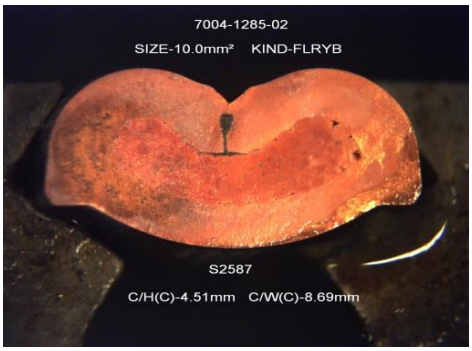
| | | |
|---|---|---|
|  | The two sides of the insulation grips are in the correct position. | **NA** |
|  | Not found any Bell Mouth in the insulation area. | **NA** |
|  | The lance height and shape are not deformed. | **NA** |
|  | Not found any burr in the cutting carrier. | **NA** |
|  | Not found any crack in the terminal. | **O** |
|  | The wire barrel is free from major burrs. | **O** |

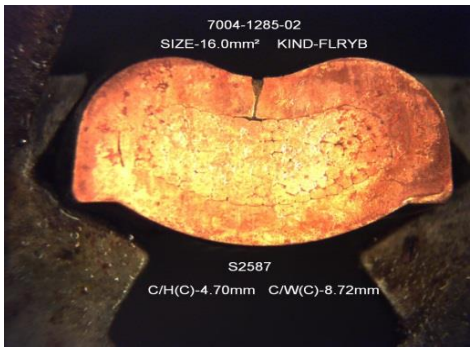
| | | |
|---|---|---|
|  | The Bell Mouth is within the spec.**(*)** | **O** |
|  | The dimension of the cutting carrier is within the spec.**(*)** | **O** |
|  | Bend up is within the criteria**(*)** | **O** |
|  | Bend down is within the criteria**(*)** | **O** |
|  | The terminal is not bent sideway, looking from the top**(*)** | **O** |
|  | The body of the terminal is not twisted**(*)** | **O** |

**(*)** - Specified on Crimping Std.

| **LOWER** WIRE KIND & SIZE | **UPPER** WIRE KIND & SIZE |
|---|---|

## 2 - MICRO CUT SAMPLES




## 3 - CRIMPING HEIGHT STABILITY

| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | 4.5 | 4.51 | 5.50 |
| | +/-**0.1** | | |


| | NOMINAL | AVERAGE | Cmk |
|---|---|---|---|
| mm | 4.7 | 4.71 | 3.55 |
| | +/-**0.1** | | |

**REMARKS:**

Aplicable wire range-10.0mm²~16.0mm².

**EVALUATION DECISION**

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

| APPROVED (Section Chief) 3485 | CHECKED (Operator) 44 | PREPARED (Operator) nº 5061 |
|---|---|---|
|  |  |  |
| Date: 2017-jun-02 | Date: 2017-jun-02 | Date: 2017-jun-01 |

YAZAKI
PORTO TECHNICAL CENTRE

# APPLICATOR VALIDATION REPORT

| Applicator Serial Nº |
|---|
| S2587 |

## LOWER WIRE KIND & SIZE

Wire kind: FLRYB
Total wire size: 10 $mm^2$

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | 4.5 | NA | mm |
| +/- | 0.1 | NA | mm |

| Sample number | Crimp height WIRE (mm) | Crimp height INSULATION (mm) |
|---|---|---|
| 1 | 4.504 | |
| 2 | 4.510 | |
| 3 | 4.511 | |
| 4 | 4.517 | |
| 5 | 4.507 | |
| 6 | 4.504 | |
| 7 | 4.512 | |
| 8 | 4.520 | |
| 9 | 4.514 | |
| 10 | 4.509 | |
| 11 | 4.515 | |
| 12 | 4.515 | |
| 13 | 4.515 | |
| 14 | 4.509 | |
| 15 | 4.509 | |
| 16 | 4.517 | |
| 17 | 4.510 | |
| 18 | 4.510 | |
| 19 | 4.516 | |
| 20 | 4.506 | |
| 21 | 4.517 | |
| 22 | 4.507 | |
| 23 | 4.522 | |
| 24 | 4.512 | |
| 25 | 4.512 | |
| 26 | 4.523 | |
| 27 | 4.515 | |
| 28 | 4.520 | |
| 29 | 4.509 | |
| 30 | 4.512 | |
| 31 | 4.520 | |
| 32 | 4.523 | |
| 33 | 4.514 | |
| 34 | 4.519 | |
| 35 | 4.515 | |
| 36 | 4.518 | |
| 37 | 4.521 | |
| 38 | 4.514 | |
| 39 | 4.519 | |
| 40 | 4.519 | |
| 41 | 4.509 | |
| 42 | 4.519 | |
| 43 | 4.510 | |
| 44 | 4.514 | |
| 45 | 4.512 | |
| 46 | 4.510 | |
| 47 | 4.517 | |
| 48 | 4.508 | |
| 49 | 4.507 | |
| 50 | 4.502 | |
| Average | 4.51 | |
| Cmk | 5.50 | |

## UPPER WIRE KIND & SIZE

Wire kind: FLRYB
Total wire size: 16 $mm^2$

| | | | |
|---|---|---|---|
| Nominal Cr. Height: | 4.7 | NA | mm |
| +/- | 0.1 | NA | mm |

| Sample number | Crimp height WIRE (mm) | Crimp height INSULATION (mm) |
|---|---|---|
| 1 | 4.723 | |
| 2 | 4.719 | |
| 3 | 4.720 | |
| 4 | 4.722 | |
| 5 | 4.717 | |
| 6 | 4.728 | |
| 7 | 4.728 | |
| 8 | 4.725 | |
| 9 | 4.719 | |
| 10 | 4.727 | |
| 11 | 4.730 | |
| 12 | 4.725 | |
| 13 | 4.721 | |
| 14 | 4.723 | |
| 15 | 4.724 | |
| 16 | 4.704 | |
| 17 | 4.702 | |
| 18 | 4.705 | |
| 19 | 4.716 | |
| 20 | 4.711 | |
| 21 | 4.705 | |
| 22 | 4.717 | |
| 23 | 4.707 | |
| 24 | 4.718 | |
| 25 | 4.708 | |
| 26 | 4.716 | |
| 27 | 4.707 | |
| 28 | 4.719 | |
| 29 | 4.707 | |
| 30 | 4.705 | |
| 31 | 4.721 | |
| 32 | 4.705 | |
| 33 | 4.716 | |
| 34 | 4.721 | |
| 35 | 4.716 | |
| 36 | 4.711 | |
| 37 | 4.714 | |
| 38 | 4.709 | |
| 39 | 4.717 | |
| 40 | 4.709 | |
| 41 | 4.708 | |
| 42 | 4.715 | |
| 43 | 4.707 | |
| 44 | 4.705 | |
| 45 | 4.702 | |
| 46 | 4.702 | |
| 47 | 4.714 | |
| 48 | 4.704 | |
| 49 | 4.704 | |
| 50 | 4.710 | |
| Average | 4.71 | |
| Cmk | 3.55 | |

**Acceptance criteria: Cmk>= 2**

**END**