PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
S2589

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70041951 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7004-1951-02	*	**MSES1045-Z**	**YSD-PO 25ENG/2017**	*







Anvil		(N)
7009-2380MDAN		
CW (c) 4.00	*CW (i)*	






Wire Crimper		(N)
7009-2380MDW		
CW 4.00		

Insulation Crimper	
CW	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

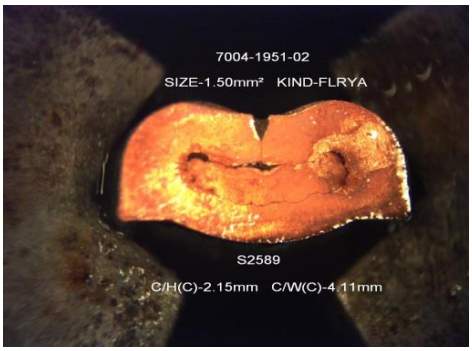
	The two sides of the insulation grips are in the correct position.	**NA**
	Not found any Bell Mouth in the insulation area.	**NA**
	The lance height and shape are not deformed.	**NA**
	Not found any burr in the cutting carrier.	**NA**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

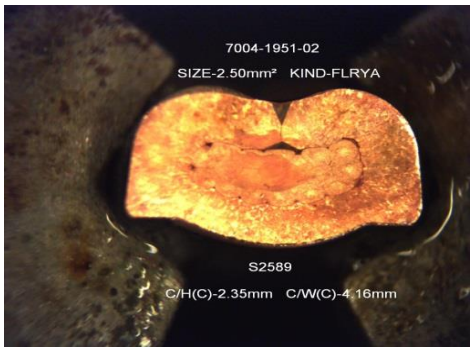
	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	2.15	2.15	2.77
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	2.35	2.36	2.65
	+/-0.05		

REMARKS:

Aplicable wire range->1.00mm²~2.50mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2017-jun-02	Date: 2017-jun-02	Date: 2017-jun-01

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
S2589

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1.5 mm^2

Nominal Cr. Height:	2.15	NA	mm
+/-	0.05	NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2.145	
2	2.150	
3	2.143	
4	2.149	
5	2.152	
6	2.144	
7	2.149	
8	2.148	
9	2.149	
10	2.150	
11	2.147	
12	2.147	
13	2.152	
14	2.140	
15	2.145	
16	2.139	
17	2.152	
18	2.141	
19	2.151	
20	2.138	
21	2.148	
22	2.133	
23	2.150	
24	2.142	
25	2.137	
26	2.150	
27	2.154	
28	2.147	
29	2.142	
30	2.151	
31	2.142	
32	2.150	
33	2.140	
34	2.151	
35	2.148	
36	2.150	
37	2.140	
38	2.146	
39	2.144	
40	2.149	
41	2.139	
42	2.147	
43	2.136	
44	2.140	
45	2.133	
46	2.144	
47	2.134	
48	2.144	
49	2.146	
50	2.150	
Average	2.15	
Cmk	2.77	

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 2.5 mm^2

Nominal Cr. Height:	2.35	NA	mm
+/-	0.05	NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	2.366	
2	2.360	
3	2.356	
4	2.361	
5	2.364	
6	2.357	
7	2.364	
8	2.367	
9	2.357	
10	2.355	
11	2.365	
12	2.357	
13	2.357	
14	2.363	
15	2.353	
16	2.355	
17	2.349	
18	2.355	
19	2.356	
20	2.348	
21	2.348	
22	2.359	
23	2.352	
24	2.363	
25	2.359	
26	2.355	
27	2.357	
28	2.365	
29	2.362	
30	2.358	
31	2.360	
32	2.358	
33	2.352	
34	2.362	
35	2.355	
36	2.362	
37	2.360	
38	2.368	
39	2.357	
40	2.353	
41	2.363	
42	2.353	
43	2.365	
44	2.353	
45	2.361	
46	2.369	
47	2.355	
48	2.365	
49	2.354	
50	2.363	
Average	2.36	
Cmk	2.65	

Acceptance criteria: Cmk>= 2

END