PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
S2713







TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70041286 SEQUENCE Nº 9





Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7004-1286-02	*	**MSES868-ZA**	**YSD-XVK81_MECAL**	*

Anvil		Wire Crimper		Insulation Crimper	
7009-2369MBA	(N)	7009-2369MBW	(N)		
CW (c) 10,50	*CW (i)*	*CW* 10,50		*CW*	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

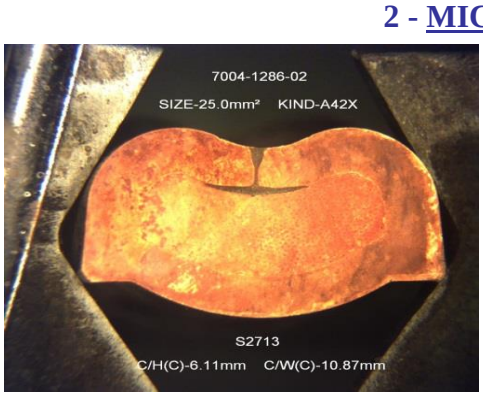
	The two sides of the insulation grips are in the correct position.	**NA**
	Not found any Bell Mouth in the insulation area.	**NA**
	The lance height and shape are not deformed.	**NA**
	Not found any burr in the cutting carrier.	**NA**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	Bend up is within the criteria**(*)**	**O**
	Bend down is within the criteria**(*)**	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	6,1	6,10	5,36
	+/-0.1		



	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range->16.00mm²~25.0mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
		
Date: 2017-dez-04	Date: 2017-nov-30	Date: 2017-nov-30

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
S2713

LOWER WIRE KIND & SIZE

Wire kind: A42X

Total wire size: 25 mm^2

Nominal Cr. Height:	6,1	NA	mm
+/-	0,1	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	6,106	
2	6,100	
3	6,104	
4	6,107	
5	6,105	
6	6,113	
7	6,098	
8	6,103	
9	6,104	
10	6,094	
11	6,091	
12	6,098	
13	6,094	
14	6,099	
15	6,108	
16	6,095	
17	6,106	
18	6,096	
19	6,105	
20	6,093	
21	6,100	
22	6,106	
23	6,106	
24	6,095	
25	6,100	
26	6,111	
27	6,099	
28	6,100	
29	6,099	
30	6,090	
31	6,107	
32	6,096	
33	6,105	
34	6,100	
35	6,091	
36	6,102	
37	6,102	
38	6,094	
39	6,096	
40	6,113	
41	6,104	
42	6,105	
43	6,088	
44	6,105	
45	6,092	
46	6,100	
47	6,090	
48	6,103	
49	6,094	
50	6,107	
Average	6,10	
Cmk	5,36	

UPPER WIRE KIND & SIZE

Wire kind: NA

Total wire size: NA mm^2

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2

END