PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
S3057

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70099320 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7009-9320-02	*	**MSES253-XL**	**YSD-3500095361**	*







Anvil		
7009-9320MDAN		(N)
CW (c)	7,00	*CW (i)*





Wire Crimper		
7009-9320MDW		(N)
CW	7,00	

Insulation Crimper	
NA	
CW	

1 - VISUAL CHECK ITEMS

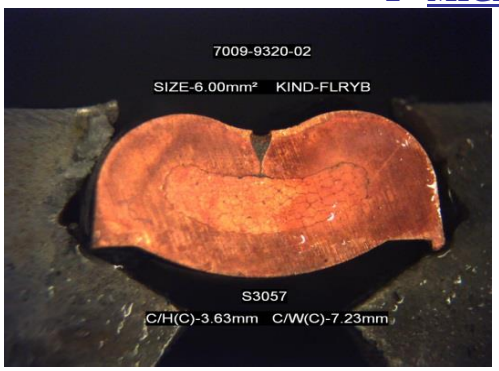
O - ok **X** - ng **NA** - not aplicable

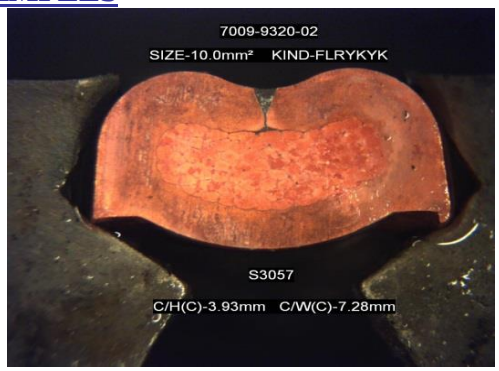
	The two sides of the insulation grips are in the correct position.	**NA**
	Not found any Bell Mouth in the insulation area.	**NA**
	The lance height and shape are not deformed.	**NA**
	Not found any burr in the cutting carrier.	**NA**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	3,65	3,64	7,01
	+/-0.1		

	NOMINAL	AVERAGE	Cmk
mm	3,95	3,94	6,26
	+/-0.1		

REMARKS:

Aplicable wire range-6.00mm²~10.0mm².

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2019-abr-15	Date: 2019-abr-12	Date: 2019-abr-12

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
S3057

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 6 mm²

Nominal Cr. Height:	3,65	NA	mm
+/-	0,1	NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	3,640	
2	3,635	
3	3,639	
4	3,639	
5	3,641	
6	3,633	
7	3,640	
8	3,644	
9	3,641	
10	3,634	
11	3,641	
12	3,639	
13	3,633	
14	3,640	
15	3,642	
16	3,634	
17	3,640	
18	3,643	
19	3,634	
20	3,639	
21	3,641	
22	3,635	
23	3,633	
24	3,637	
25	3,642	
26	3,638	
27	3,635	
28	3,641	
29	3,635	
30	3,641	
31	3,636	
32	3,633	
33	3,640	
34	3,641	
35	3,633	
36	3,643	
37	3,645	
38	3,636	
39	3,643	
40	3,645	
41	3,646	
42	3,639	
43	3,648	
44	3,649	
45	3,644	
46	3,640	
47	3,643	
48	3,647	
49	3,644	
50	3,636	
Average	3,64	
Cmk	7,01	

UPPER WIRE KIND & SIZE

Wire kind: FLRYKYK

Wire size: 10 mm²

Nominal Cr. Height:	3,95	NA	mm
+/-	0,1	NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	3,938	
2	3,944	
3	3,944	
4	3,936	
5	3,946	
6	3,945	
7	3,939	
8	3,946	
9	3,947	
10	3,939	
11	3,941	
12	3,949	
13	3,946	
14	3,937	
15	3,947	
16	3,937	
17	3,942	
18	3,939	
19	3,939	
20	3,948	
21	3,940	
22	3,934	
23	3,941	
24	3,936	
25	3,944	
26	3,934	
27	3,933	
28	3,944	
29	3,944	
30	3,933	
31	3,933	
32	3,943	
33	3,948	
34	3,950	
35	3,944	
36	3,933	
37	3,943	
38	3,936	
39	3,934	
40	3,938	
41	3,943	
42	3,939	
43	3,941	
44	3,945	
45	3,946	
46	3,935	
47	3,941	
48	3,941	
49	3,934	
50	3,940	
Average	3,94	
Cmk	6,26	

Acceptance criteria: Cmk>= 2,0

END