APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)







Applicator Serial Nº
S3070

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 70041285 SEQUENCE Nº 9




Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7004-1285-02	*	**MSES254-XF**	**YSD-3500095361**	*

Anvil			Wire Crimper			Insulation Crimper	
7004-1285MDA		(A)	7004-1285MDW		(A)	NA	
CW (c)	*CW (i)*		*CW*			*CW*	

1 - VISUAL CHECK ITEMS

	The two sides of the insulation grips are in the correct position.	**NA**
	Not found any Bell Mouth in the insulation area.	**NA**
	The lance height and shape are not deformed.	**NA**
	Not found any burr in the cutting carrier.	**NA**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

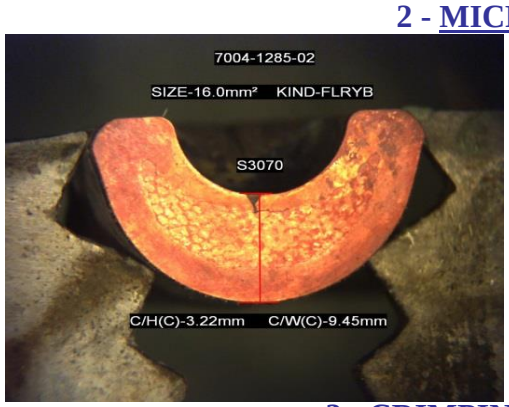
O - ok **X** - ng **NA** - not aplicable

	The Bell Mouth is within the spec.**(*)**	**NA**
	The dimension of the cutting carrier is within the spec.**(*)**	**NA**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	3,2	3,22	3,42
	+/-0,1		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range-16.0mm²~16.0mm².

EVALUATION DECISION

SUITABLE [ ]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2018-dez-12	Date: 2018-dez-06	Date: 2018-dez-06

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
S3070

LOWER WIRE KIND & SIZE

Wire kind:	FLRYB		
Wire size:	16		mm^2
Nominal Cr. Height:	3,2	NA	mm
+/-	0,1	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	3,224	
2	3,224	
3	3,218	
4	3,222	
5	3,230	
6	3,218	
7	3,226	
8	3,217	
9	3,226	
10	3,220	
11	3,216	
12	3,230	
13	3,230	
14	3,218	
15	3,225	
16	3,221	
17	3,236	
18	3,227	
19	3,235	
20	3,217	
21	3,222	
22	3,218	
23	3,218	
24	3,230	
25	3,220	
26	3,232	
27	3,218	
28	3,238	
29	3,220	
30	3,231	
31	3,228	
32	3,223	
33	3,224	
34	3,215	
35	3,214	
36	3,219	
37	3,214	
38	3,216	
39	3,211	
40	3,214	
41	3,222	
42	3,205	
43	3,213	
44	3,207	
45	3,208	
46	3,206	
47	3,211	
48	3,222	
49	3,225	
50	3,224	
Average	3,22	
Cmk	3,42	

UPPER WIRE KIND & SIZE

Wire kind:	NA	+	NA	
Wire size:	NA	+	NA	mm^2
Nominal Cr. Height:	NA		NA	mm
+/-	NA		NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

END