APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1711E007

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164453 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-4453-02	*	**04 SIDE FEED**	**YSD-PP18_XVK84**	*







Anvil		
7116-4453XAC		(N)
CW (c) 2,63	*CW (i)* 3,53	





Wire Crimper	
7116-4453XW	(1)
CW 2,61	

Insulation Crimper	
7116-4453XIC	(3)
CW 3,53	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

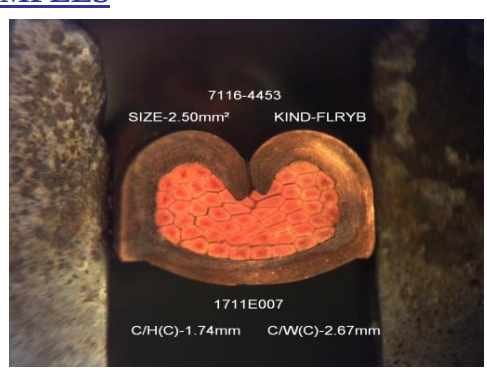
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,47	1,47	3,57
	+/-0.03		

	NOMINAL	AVERAGE	Cmk
mm	1,75	1,75	3,78
	+/-0.03		

REMARKS:

Aplicable wire range 1.50mm²~2.50mm²
Wire 1.50mm² C/W(I)-3.48mm
Wire 2.50mm² C/W(I)-3.57mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2017-nov-13	Date: 2017-nov-10	Date: 2017-nov-10

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1711E007

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1,5 mm^2

Nominal Cr. Height:	1,47	2,9	mm
+/-	0,03	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,470	2,901
2	1,473	2,900
3	1,473	2,904
4	1,474	2,901
5	1,474	2,900
6	1,472	2,902
7	1,472	2,897
8	1,473	2,899
9	1,468	2,898
10	1,470	2,896
11	1,469	2,899
12	1,475	2,898
13	1,474	2,897
14	1,471	2,899
15	1,475	2,901
16	1,475	2,895
17	1,472	2,898
18	1,473	2,897
19	1,473	2,897
20	1,472	2,897
21	1,473	2,897
22	1,473	2,898
23	1,474	2,895
24	1,470	2,899
25	1,474	2,899
26	1,474	2,887
27	1,472	2,898
28	1,467	2,896
29	1,475	2,901
30	1,468	2,895
31	1,472	2,901
32	1,466	2,892
33	1,480	2,890
34	1,475	2,898
35	1,477	2,901
36	1,470	2,891
37	1,471	2,905
38	1,472	2,891
39	1,470	2,902
40	1,473	2,896
41	1,472	2,889
42	1,469	2,908
43	1,474	2,901
44	1,470	2,895
45	1,474	2,904
46	1,474	2,904
47	1,472	2,899
48	1,476	2,901
49	1,471	2,894
50	1,472	2,894
Average	1,47	2,90
Cmk	3,57	7,79

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 2,5 mm^2

Nominal Cr. Height:	1,75	3,3	mm
+/-	0,03	0,1	mm

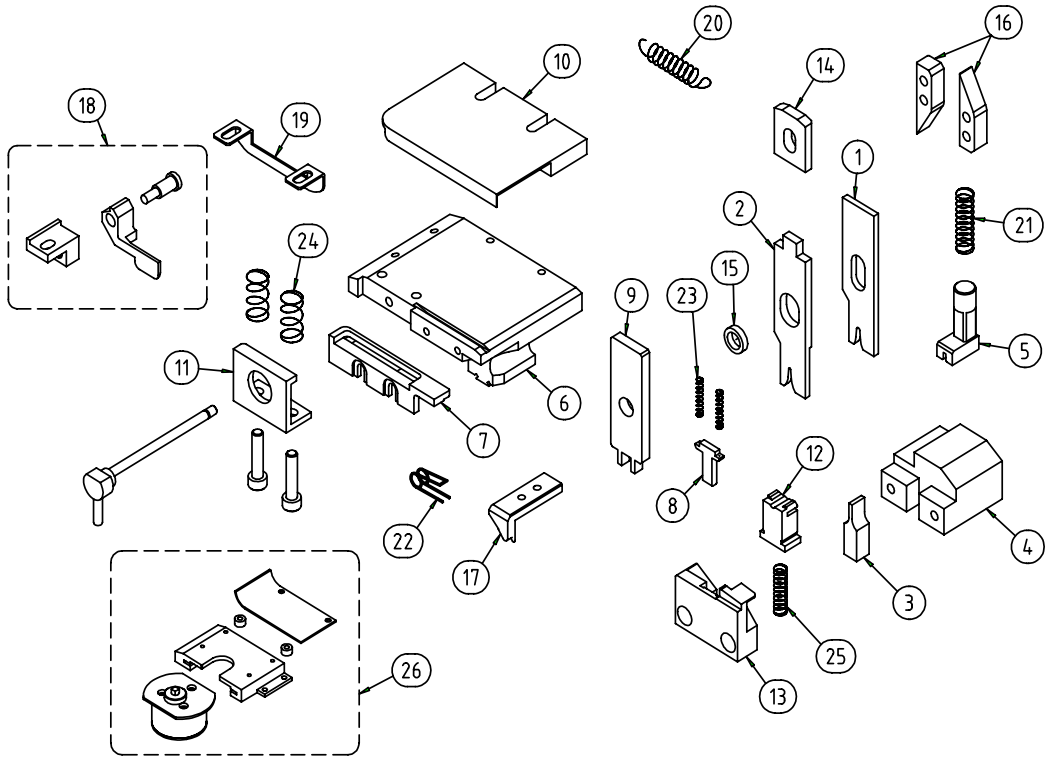
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,753	3,308
2	1,750	3,307
3	1,751	3,308
4	1,751	3,304
5	1,756	3,300
6	1,755	3,303
7	1,755	3,298
8	1,756	3,300
9	1,754	3,294
10	1,754	3,295
11	1,755	3,291
12	1,753	3,298
13	1,751	3,310
14	1,755	3,294
15	1,755	3,310
16	1,751	3,292
17	1,754	3,307
18	1,752	3,288
19	1,754	3,294
20	1,749	3,295
21	1,755	3,303
22	1,752	3,301
23	1,752	3,305
24	1,750	3,301
25	1,752	3,299
26	1,754	3,300
27	1,750	3,303
28	1,752	3,301
29	1,753	3,301
30	1,751	3,301
31	1,751	3,301
32	1,752	3,301
33	1,750	3,299
34	1,750	3,301
35	1,752	3,300
36	1,753	3,300
37	1,752	3,296
38	1,749	3,300
39	1,743	3,303
40	1,756	3,298
41	1,752	3,303
42	1,751	3,304
43	1,748	3,301
44	1,752	3,300
45	1,753	3,301
46	1,749	3,299
47	1,748	3,300
48	1,752	3,301
49	1,750	3,297
50	1,751	3,303
Average	1,75	3,30
Cmk	3,78	7,25

Acceptance criteria: Cmk>= 2

END

04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表 ／04 APPLICATOR CONSUMABLE PARTS LIST

製品番号 PRODUCT No.	C0100-4076	端子品番 TERMINAL No.	7116-4453C



No.	部品番号 PARTS No.	図番 DRW. No.	部品名称 PARTS NAME
1	7116-4453XW		ﾜｲﾔｰｸﾘﾝﾊﾟｰ WIRE CRIMPER
2	7116-4453XIC		ｲﾝｼｭｸﾘﾝﾊﾟｰ INSULATION CRIMPER
3	7116-4453XAC		ｱﾝﾋﾞﾙ ANVIL
4	7116-4453CXJE		ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ ANVIL HOLDER
5	7116-4453CXYY		ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ SUPPORTING STOPPER
6	7116-4453CXYB		ﾍﾞｰｽ BASE
7	7116-4453CXYH		ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB TERMINAL GUIDE PLATE B
8	48A47016	001	電線押さえ WIRE HOLDER
9	48A47017	002	切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ CUTTING PUNCH & WIRE HOLDER
10	48A47020	A05 ①	ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA TERMINAL GUIDE PLATE A
11	48A47022	001 ①	ﾀｰﾐﾅﾙ押さえ TERMINAL HOLDER
12	48A47024	002	ｼｬｰﾌﾟﾚｰﾄﾞ SHEARBLADE
13	48A47025	002/101	ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ OUTER SHEARBLADE
14	48A19007	025 ①	ｲﾝｼｭ調整ｺﾏ INSULATION ADJUSTING PIECE
15	48A19019	014	ﾌﾞｯｼｭ BUSH

No.	部品番号 PARTS No.	図番 DRW. No.	部品名称 PARTS NAME
16	48A47014	001	送りｶﾑ FEEDING CAM
17	48A47013		送り爪 FEEDING CLAW
18	48A19100	005	電線ｽﾄｯﾊﾟｰ Assy WIRE STOPPER Assy
19	48A19047	002 ②	端子掻き落とし TERMINAL SCRAPER
20	48A47031		戻しｽﾌﾟﾘﾝｸﾞ RETURN SPRING
21	48A47032	001	ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ SUPPORTING STOPPER SPRING
22	48A19017	003	送り爪ｽﾌﾟﾘﾝｸﾞ FEEDING CLAW SPRING
23	48A19023	001	電線押さえｽﾌﾟﾘﾝｸﾞ WIRE HOLDER SPRING
24	48A19074		ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ TERMINAL HOLDER SPRING
25	48A19050		ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ SHEARBLADE SPRING
26	48A19999		ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ TERMINAL OIL UNIT
27	7116-4453CXKP		ﾌﾞﾗｹｯﾄ BRACKET
<ｵﾌﾟｼｮﾝ OPTION>			
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK	DATE	REVISION RECORD	No.	CHECKED
②	2010/9/13	003→002	10H-046	Y.NOZAWA
①	2007/12/20	CHANGED No.	QX7	T,Suzuki

APPRICATION POST	
専用機	
DESIGNED DATE	
2006/9/4	
APPROVED	DESIGNED
松田	八木
2006/9/4	2006/9/4

ISSUED '12.03.08 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED MARK

YAZAKI