PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1711E009

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7216-7793 * SEQUENCE Nº 9










Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7216-7793-02	*	**MXSR**	**YSD-4514078965**	**AIMLER TRUCK B**

Applicable Terminals for this Tool:

7216-7793-02	**7216-7793-06**			

Anvil			Wire Crimper		Insulation Crimper	
7216-7793XA		(N)	7216-7793XW	(1)	7216-7793XI	(1)
CW (c)	1,42 *CW (i)* 1,83		*CW* 1,40		*CW* 1,83	


1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)			
					O - ok **X** - ng **NA** - not aplicable		
	The two sides of the insulation grips are in the correct position.	**O**	0~0.35mm 0.15~0.35mm	0 0.33		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**O**	0~0.30mm	0.22		The dimension of the cutting carrier is within the spec.**(*)**	**O**
	The lance height and shape are not deformed.	**O**	0~0.20mm 0~0.20mm	0.06 -		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**O**	0.10~0.40mm	0.35		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	5º	0.1		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	0~0.30mm	0		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

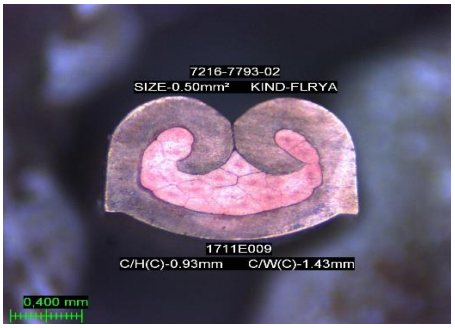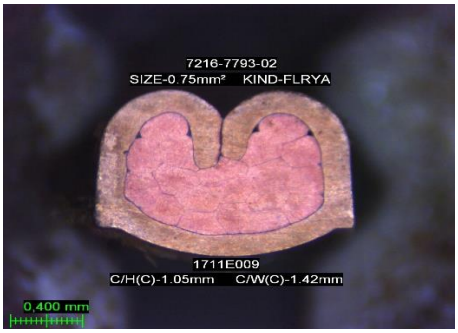2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0,93	0,94	2,15
	+/-0.03		

	NOMINAL	AVERAGE	Cmk
mm	1,05	1,05	2,91
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~0.75mm².
Size 0.50mm² C/W(I)-1.88mm
Size 0.75mm² C/W(I)-1.93mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
Date: 2024/jul/08	Date: 2024/jun/24	Date: 2024/jun/21

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1711E009

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,5 mm²

Nominal Cr. Height:	0,93	1,85	mm
+/-	0,03	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0,932	1,842
2	0,928	1,851
3	0,932	1,852
4	0,929	1,847
5	0,934	1,842
6	0,938	1,845
7	0,942	1,852
8	0,935	1,846
9	0,935	1,842
10	0,942	1,848
11	0,938	1,851
12	0,935	1,843
13	0,941	1,843
14	0,943	1,851
15	0,937	1,844
16	0,935	1,853
17	0,933	1,854
18	0,938	1,845
19	0,940	1,845
20	0,935	1,852
21	0,936	1,855
22	0,939	1,844
23	0,934	1,851
24	0,936	1,845
25	0,941	1,842
26	0,937	1,851
27	0,932	1,853
28	0,931	1,845
29	0,935	1,849
30	0,938	1,856
31	0,939	1,848
32	0,932	1,852
33	0,937	1,858
34	0,941	1,854
35	0,936	1,846
36	0,935	1,857
37	0,938	1,859
38	0,934	1,845
39	0,937	1,851
40	0,939	1,855
41	0,938	1,849
42	0,933	1,842
43	0,939	1,850
44	0,940	1,849
45	0,934	1,843
46	0,932	1,842
47	0,939	1,854
48	0,943	1,855
49	0,934	1,847
50	0,943	1,845
Average	0,94	1,85
Cmk	2,15	6,77

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,75 mm²

Nominal Cr. Height:	1,05	2,05	mm
+/-	0,05	0,1	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,048	2,053
2	1,042	2,049
3	1,048	2,053
4	1,040	2,048
5	1,047	2,057
6	1,049	2,052
7	1,041	2,047
8	1,048	2,059
9	1,048	2,050
10	1,042	2,055
11	1,050	2,060
12	1,041	2,050
13	1,048	2,056
14	1,046	2,062
15	1,038	2,051
16	1,046	2,050
17	1,050	2,062
18	1,052	2,063
19	1,046	2,053
20	1,047	2,050
21	1,053	2,059
22	1,055	2,049
23	1,047	2,054
24	1,056	2,049
25	1,057	2,045
26	1,053	2,047
27	1,057	2,058
28	1,048	2,046
29	1,052	2,045
30	1,051	2,050
31	1,045	2,057
32	1,052	2,049
33	1,057	2,050
34	1,050	2,057
35	1,046	2,058
36	1,057	2,047
37	1,059	2,057
38	1,054	2,060
39	1,049	2,055
40	1,059	2,049
41	1,051	2,058
42	1,055	2,064
43	1,060	2,064
44	1,057	2,053
45	1,051	2,057
46	1,061	2,061
47	1,051	2,053
48	1,048	2,053
49	1,057	2,060
50	1,060	2,060
Average	1,05	2,05
Cmk	2,91	5,98

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-5633	TERMINAL No. 端子品番	7216-7793
共通品番	– – – – – – – –		

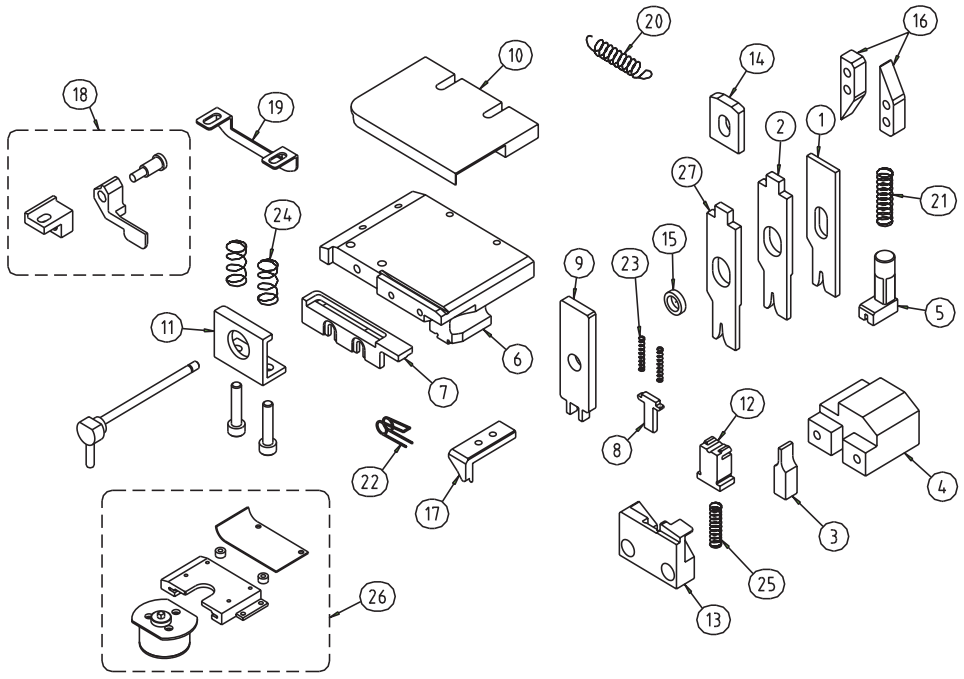

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7216-7793XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	-001	FEEDING CLAW 送り爪
2	7216-7793XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-005	WIRE STOPPER Assy 電線ストッパーアッシー
3	7216-7793XA		ANVIL アンビル	19	48A19047	002 ①	TERMINAL SCRAPER 端子掻き落とし
4	7216-7793XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7216-7793XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7216-7793XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7216-7793XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
10	48A47020	-A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ		7216-7793XKP		BRACKET ブラケット
12	48A47024	-001	SHEARBLADE シャーブレード	27	~~7216-7793XQ~~		~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	-002	OUTER SHEARBLADE アウターシャーブレード	〈OPTION オプション〉			
14	48A19007	-025	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャーブレード
15	48A19019	-019	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-003	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	DESIGNED 設計	ISSUED 発行
					YUL		
					DESIGNED DATE 設計日		
					2/18/2013		
					APPROVED 承認	DESIGNED 設計	
①	2014/11/5	003→002	14K-021	Y.YAGI	T,Maki	C.Almeida	
					2/18/2013	2/18/2013	

ISSUE
5/29/2018
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.