APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1801E025

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72115181 SEQUENCE Nº 1

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7211-5181-02	*	**04 SIDE FEED**	**YWTC-4510728895**	*






Anvil		
7211-5181XA		(N)
CW (c) 1,42	*CW (i)* 2,03	




Wire Crimper		
7211-5181XW		(N)
CW 1,40		

Insulation Crimper		
7211-5181XI		(N)
CW 2,03		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

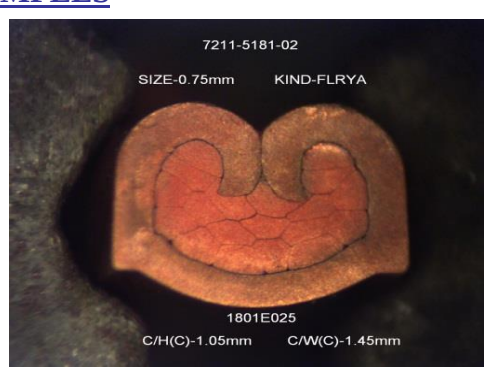
(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0,95	0,96	4,09
	+/-0,05		

	NOMINAL	AVERAGE	Cmk
mm	1,05	1,05	4,50
	+/-0,05		

REMARKS:

Aplicable wire range-0.50~0.75mm2
Size 0.50mm2 C/W(I)-2.01mm
Size 0.75mm2 C/W(I)-2.06mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
Date: 2018-jan-29	Date: 2018-jan-29	Date: 2018-jan-29

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1801E025

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	0,95	1,7	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	0,957	1,715
2	0,959	1,713
3	0,962	1,710
4	0,960	1,705
5	0,958	1,709
6	0,955	1,711
7	0,953	1,707
8	0,955	1,703
9	0,957	1,706
10	0,962	1,709
11	0,960	1,712
12	0,956	1,710
13	0,954	1,707
14	0,956	1,704
15	0,958	1,706
16	0,962	1,708
17	0,964	1,711
18	0,962	1,715
19	0,959	1,713
20	0,957	1,710
21	0,958	1,707
22	0,959	1,704
23	0,964	1,707
24	0,966	1,710
25	0,960	1,712
26	0,956	1,715
27	0,960	1,716
28	0,963	1,712
29	0,965	1,709
30	0,961	1,705
31	0,953	1,703
32	0,955	1,705
33	0,958	1,708
34	0,960	1,712
35	0,961	1,714
36	0,957	1,711
37	0,954	1,708
38	0,952	1,705
39	0,954	1,701
40	0,959	1,703
41	0,960	1,706
42	0,963	1,708
43	0,959	1,711
44	0,957	1,707
45	0,955	1,704
46	0,953	1,700
47	0,955	1,704
48	0,958	1,708
49	0,960	1,706
50	0,957	1,708
Average	0,96	1,71
Cmk	4,09	7,97

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,75 mm^2

Nominal Cr. Height:	1,05	2,05	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,055	2,052
2	1,060	2,052
3	1,055	2,058
4	1,052	2,054
5	1,048	2,050
6	1,050	2,044
7	1,050	2,048
8	1,054	2,051
9	1,052	2,054
10	1,049	2,055
11	1,046	2,059
12	1,048	2,055
13	1,050	2,052
14	1,052	2,047
15	1,056	2,051
16	1,060	2,053
17	1,056	2,056
18	1,054	2,059
19	1,052	2,056
20	1,049	2,053
21	1,051	2,049
22	1,053	2,046
23	1,054	2,049
24	1,058	2,053
25	1,056	2,062
26	1,054	2,061
27	1,051	2,056
28	1,049	2,053
29	1,051	2,049
30	1,055	2,047
31	1,051	2,049
32	1,047	2,053
33	1,051	2,055
34	1,055	2,060
35	1,057	2,055
36	1,054	2,051
37	1,051	2,049
38	1,048	2,052
39	1,050	2,056
40	1,054	2,058
41	1,059	2,062
42	1,055	2,064
43	1,052	2,065
44	1,050	2,061
45	1,052	2,056
46	1,056	2,053
47	1,057	2,057
48	1,060	2,060
49	1,055	2,063
50	1,050	2,057
Average	1,05	2,05
Cmk	4,50	6,43

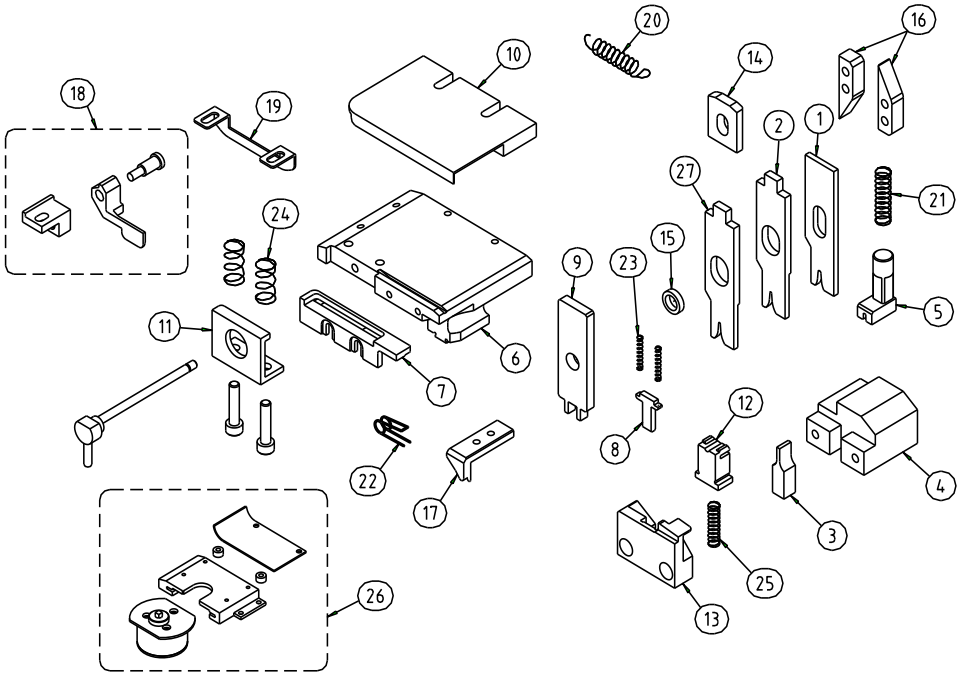
Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-5632	TERMINAL No. 端子品番	7211-5181

共通品番	–	–	–	–
	–	–		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7211-5181XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	-001	FEEDING CLAW 送り爪
2	7211-5181XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7211-5181XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	-002	TERMINAL SCRAPER 端子掻き落とし
4	7211-5181XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7211-5181XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7211-5181XYB		BASE ﾍﾞｰｽ	22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7211-5181XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	-002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	-A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	-001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7211-5181XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	-001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27	~~7211-5181XQ~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	-001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	-026	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	-016	BUSH ﾌﾞｯｼｭ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	-003	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署	
YUL	
DESIGNED DATE 設計日	
15-02-2013	
APPROVED 承認	DESIGNED 設計
T,Maki	C.Almeida
15-02-2013	15-02-2013

ISSUED 発行