APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1803E037

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164451 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-4451-02	*	**04 SIDE FEED**	**YSD_2018_001~008**	*






Anvil		
7116-4451ZZXAC		(N)
CW (c) 1,65	*CW (i)* 2,60	




Wire Crimper		
7116-4451ZZXW		(N)
CW 1,63		

Insulation Crimper		
7116-4451XI		(N)
CW 2,60		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

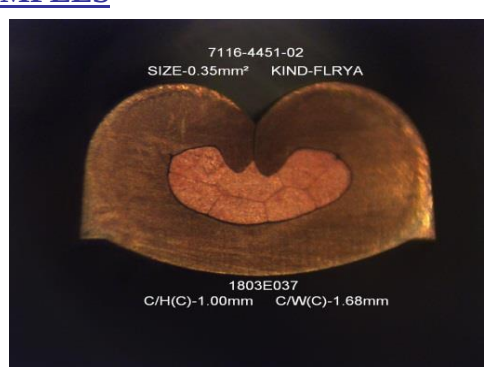
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0,97	0,97	2,90
	+/-0.03		



	NOMINAL	AVERAGE	Cmk
mm	0,99	1,00	2,32
	+/-0.03		

REMARKS:

Aplicable wire range 0.22mm²~0.35m².
Size 0.22mm² C/W(I)-2.49mm
Size 0.35mm² C/W(I)-2.50mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
		
Date: 2018-mar-22	Date: 2018-mar-20	Date: 2018-mar-20

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1803E037

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,22 mm^2

Nominal Cr. Height:	0,97	1,8	mm
+/-	0,03	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0,974	1,806
2	0,978	1,799
3	0,972	1,809
4	0,975	1,801
5	0,979	1,805
6	0,972	1,810
7	0,970	1,807
8	0,975	1,802
9	0,974	1,802
10	0,975	1,810
11	0,971	1,813
12	0,966	1,803
13	0,965	1,808
14	0,973	1,812
15	0,972	1,808
16	0,968	1,799
17	0,964	1,807
18	0,969	1,812
19	0,971	1,805
20	0,969	1,806
21	0,971	1,808
22	0,968	1,803
23	0,972	1,795
24	0,974	1,806
25	0,967	1,809
26	0,975	1,806
27	0,970	1,800
28	0,968	1,807
29	0,971	1,809
30	0,976	1,800
31	0,973	1,808
32	0,970	1,809
33	0,973	1,802
34	0,972	1,809
35	0,967	1,803
36	0,969	1,798
37	0,973	1,810
38	0,967	1,812
39	0,972	1,813
40	0,973	1,806
41	0,968	1,806
42	0,970	1,813
43	0,967	1,803
44	0,967	1,802
45	0,967	1,810
46	0,971	1,810
47	0,966	1,800
48	0,971	1,805
49	0,973	1,806
50	0,973	1,800
Average	0,97	1,81
Cmk	2,90	7,12

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,35 mm^2

Nominal Cr. Height:	0,99	1,9	mm
+/-	0,03	0,1	mm

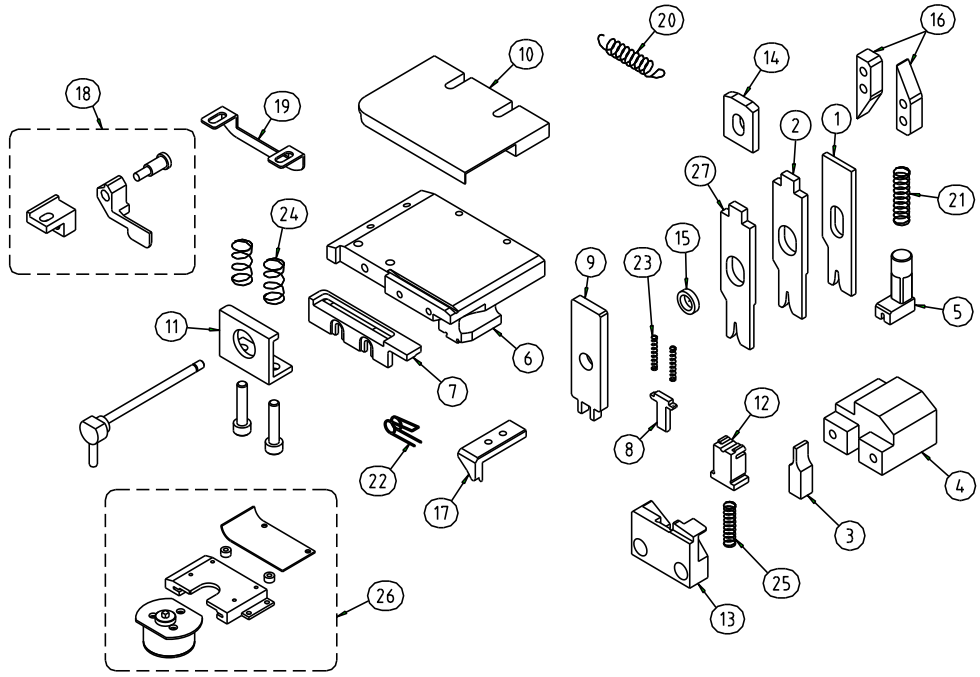
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,000	1,904
2	1,000	1,896
3	1,001	1,902
4	0,996	1,896
5	0,992	1,890
6	0,997	1,901
7	0,997	1,893
8	0,994	1,899
9	0,999	1,896
10	0,996	1,889
11	0,993	1,899
12	1,000	1,904
13	0,998	1,894
14	0,995	1,903
15	1,000	1,907
16	1,000	1,898
17	0,993	1,906
18	0,999	1,904
19	1,001	1,892
20	0,995	1,905
21	0,991	1,894
22	0,998	1,892
23	0,999	1,905
24	0,993	1,909
25	0,995	1,897
26	1,000	1,899
27	0,994	1,906
28	0,993	1,909
29	0,995	1,893
30	0,999	1,903
31	0,991	1,909
32	0,991	1,892
33	0,996	1,889
34	0,994	1,900
35	0,991	1,906
36	0,989	1,890
37	0,996	1,902
38	0,997	1,905
39	0,991	1,892
40	0,993	1,902
41	0,999	1,905
42	0,993	1,896
43	0,992	1,904
44	0,999	1,907
45	0,994	1,896
46	0,990	1,899
47	0,989	1,909
48	0,998	1,898
49	0,995	1,895
50	0,989	1,905
Average	1,00	1,90
Cmk	2,32	5,58

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	ZZ	TERMINAL No. 端子品番	7116-4451 C
共通品番	– – – – – –		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-4451ZZXW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-4451XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-4451ZZXAC		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	003	TERMINAL SCRAPER 端子掻き落とし
4	7116-4451XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-4451XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-4451XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-4451XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	001	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	004	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-4451XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27	~~7116-4451XQ~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	027	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	015	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署	
YWTL	
DESIGNED DATE 設計日	
17-02-2016	
APPROVED 承認	DESIGNED 設計
S.Junior	C.F.Almeida
17-02-2016	17-02-2016

ISSUED 発行