APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1803E038

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164451 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-4451-02	*	**04 SIDE FEED**	**YSD_2018_001~008**	*







Anvil		
7116-4451ZZXAC		(N)
CW (c) 1,65	*CW (i)* 2,60	





Wire Crimper	
7116-4451ZZXW	(N)
CW 1,63	

Insulation Crimper	
7116-4451XI	(N)
CW 2,60	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

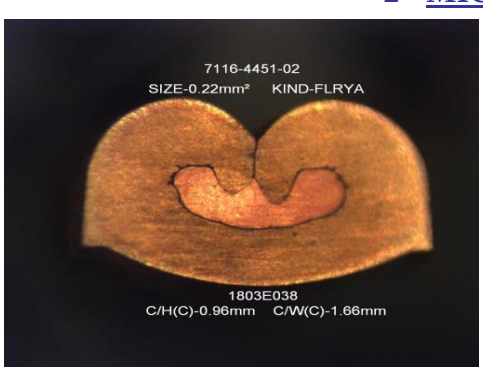
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0,97	0,98	2,61
	+/-0.03		

	NOMINAL	AVERAGE	Cmk
mm	0,99	1,00	2,23
	+/-0.03		

REMARKS:

Aplicable wire range 0.22mm²~0.35m².
Size 0.22mm² C/W(I)-2.49mm
Size 0.35mm² C/W(I)-2.51mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
		Vitor Hugo
Date: 2018-mar-22	Date: 2018-mar-20	Date: 2018-mar-20

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1803E038

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,22 mm^2

Nominal Cr. Height:	0,97	1,8	mm
+/-	0,03	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0,974	1,800
2	0,973	1,794
3	0,975	1,802
4	0,973	1,802
5	0,976	1,795
6	0,973	1,803
7	0,975	1,796
8	0,982	1,803
9	0,976	1,805
10	0,977	1,803
11	0,981	1,797
12	0,985	1,803
13	0,977	1,800
14	0,974	1,793
15	0,980	1,802
16	0,975	1,798
17	0,972	1,793
18	0,977	1,801
19	0,978	1,806
20	0,975	1,801
21	0,978	1,797
22	0,975	1,805
23	0,979	1,795
24	0,981	1,792
25	0,975	1,799
26	0,973	1,804
27	0,977	1,799
28	0,980	1,794
29	0,974	1,802
30	0,972	1,805
31	0,977	1,794
32	0,969	1,802
33	0,974	1,804
34	0,977	1,798
35	0,978	1,791
36	0,975	1,799
37	0,972	1,802
38	0,973	1,805
39	0,974	1,796
40	0,972	1,804
41	0,971	1,804
42	0,974	1,804
43	0,976	1,807
44	0,974	1,801
45	0,972	1,797
46	0,976	1,805
47	0,978	1,806
48	0,973	1,795
49	0,973	1,797
50	0,978	1,803
Average	0,98	1,80
Cmk	2,61	7,76

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,35 mm^2

Nominal Cr. Height:	0,99	1,9	mm
+/-	0,03	0,1	mm

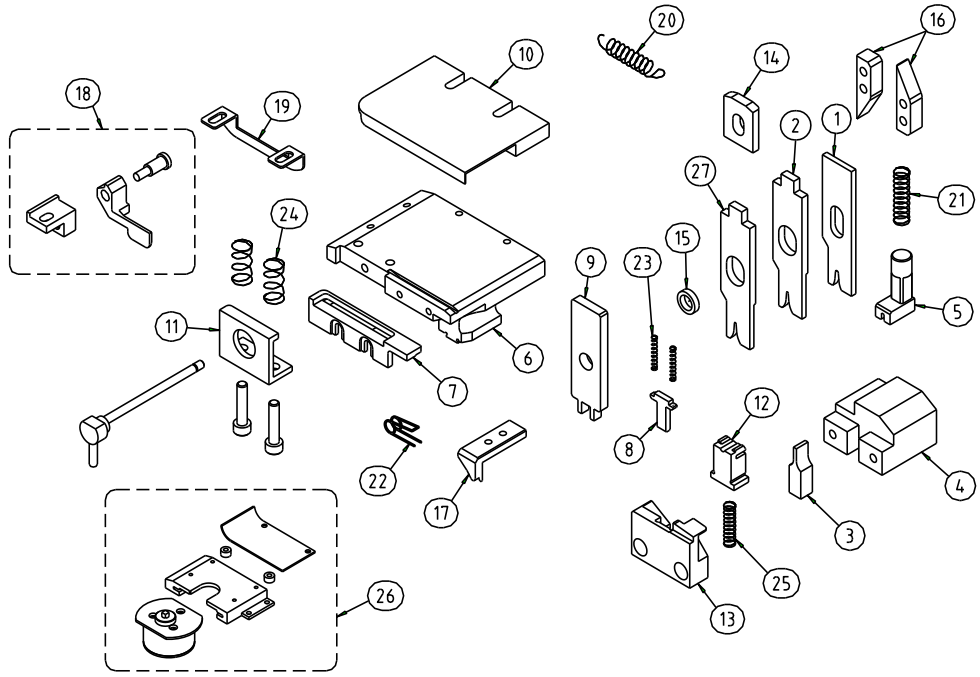
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0,997	1,905
2	0,994	1,895
3	1,000	1,900
4	0,994	1,904
5	0,999	1,896
6	1,001	1,888
7	0,995	1,898
8	1,000	1,896
9	0,998	1,893
10	0,995	1,902
11	1,001	1,904
12	0,996	1,894
13	0,997	1,899
14	1,002	1,904
15	0,996	1,894
16	0,992	1,898
17	0,997	1,903
18	0,999	1,895
19	0,994	1,904
20	0,998	1,906
21	1,001	1,896
22	0,999	1,902
23	0,993	1,906
24	0,996	1,903
25	1,001	1,895
26	0,995	1,903
27	0,991	1,907
28	0,991	1,904
29	0,997	1,893
30	0,997	1,901
31	0,992	1,906
32	0,990	1,899
33	0,995	1,900
34	0,997	1,907
35	0,993	1,897
36	0,988	1,900
37	0,993	1,911
38	0,994	1,911
39	0,988	1,901
40	0,988	1,899
41	0,996	1,905
42	0,993	1,903
43	0,990	1,899
44	0,997	1,902
45	0,991	1,906
46	0,991	1,904
47	0,997	1,906
48	0,991	1,906
49	0,996	1,901
50	0,998	1,903
Average	1,00	1,90
Cmk	2,23	6,77

Acceptance criteria: Cmk>= 2.0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	ZZ	TERMINAL No. 端子品番	7116-4451 C
共通品番	– – – – – –		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-4451ZZXW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-4451XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-4451ZZXAC		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	003	TERMINAL SCRAPER 端子掻き落とし
4	7116-4451XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-4451XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-4451XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-4451XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	001	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	004	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-4451XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27	~~7116-4451XQ~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	027	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	015	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署	
YWTL	
DESIGNED DATE 設計日	
17-02-2016	
APPROVED 承認	DESIGNED 設計
S.Junior	C.F.Almeida
17-02-2016	17-02-2016

ISSUED 発行