APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1803E039

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164453 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-4453-02	*	**04 SIDE FEED**	**YSD_2018_001~008**	*







Anvil		
7116-4453XAC		(N)
CW (c) 2,63	*CW (i)* 3,53	




Wire Crimper	
7116-4453XW	(1)
CW 2,61	

Insulation Crimper	
7116-4453XIC	(3)
CW 3,53	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

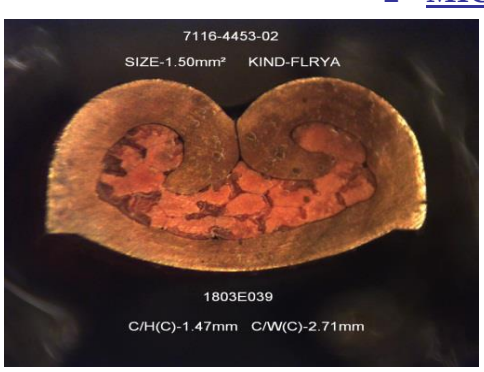
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

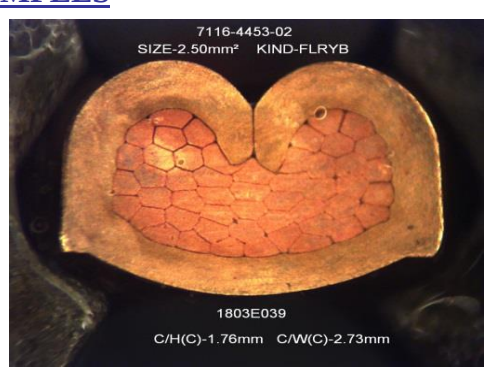
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,47	1,47	2,58
	+/-0.03		



	NOMINAL	AVERAGE	Cmk
mm	1,75	1,75	2,58
	+/-0.03		

REMARKS:

Aplicable wire range:1.50mm²~2.50mm².
Wire 1.50mm² C/W(I)-3.52mm
Wire 2.50mm² C/W(C)-3.61mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
		
Date: 2018-mar-22	Date: 2018-mar-20	Date: 2018-mar-20

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1803E039

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1,5 mm^2

Nominal Cr. Height:	1,47	2,9	mm
+/-	0,03	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,475	2,904
2	1,473	2,905
3	1,470	2,904
4	1,475	2,904
5	1,467	2,906
6	1,473	2,902
7	1,471	2,912
8	1,475	2,915
9	1,468	2,915
10	1,470	2,908
11	1,466	2,907
12	1,475	2,911
13	1,475	2,912
14	1,469	2,906
15	1,468	2,910
16	1,468	2,913
17	1,474	2,914
18	1,469	2,904
19	1,467	2,909
20	1,474	2,905
21	1,477	2,912
22	1,477	2,910
23	1,474	2,906
24	1,470	2,905
25	1,470	2,910
26	1,477	2,904
27	1,469	2,908
28	1,469	2,910
29	1,474	2,908
30	1,469	2,906
31	1,474	2,900
32	1,468	2,903
33	1,467	2,910
34	1,475	2,908
35	1,467	2,908
36	1,466	2,902
37	1,477	2,912
38	1,474	2,902
39	1,477	2,906
40	1,473	2,910
41	1,475	2,900
42	1,479	2,904
43	1,476	2,909
44	1,469	2,906
45	1,469	2,906
46	1,472	2,905
47	1,477	2,905
48	1,470	2,900
49	1,468	2,902
50	1,474	2,906
Average	1,47	2,91
Cmk	2,58	7,97

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 2,5 mm^2

Nominal Cr. Height:	1,75	3,3	mm
+/-	0,03	0,1	mm

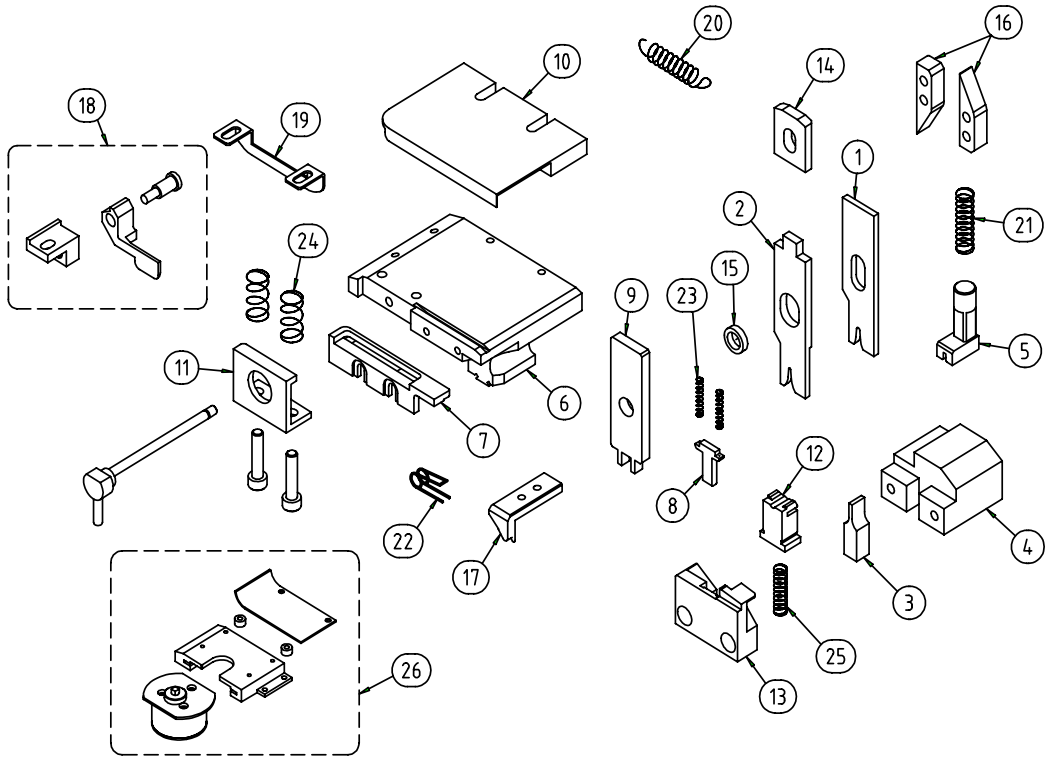
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,748	3,311
2	1,745	3,305
3	1,750	3,308
4	1,748	3,308
5	1,751	3,306
6	1,753	3,310
7	1,747	3,304
8	1,748	3,298
9	1,743	3,302
10	1,746	3,304
11	1,750	3,304
12	1,753	3,304
13	1,754	3,308
14	1,746	3,301
15	1,744	3,305
16	1,741	3,308
17	1,747	3,301
18	1,750	3,300
19	1,753	3,304
20	1,745	3,305
21	1,743	3,301
22	1,752	3,302
23	1,749	3,309
24	1,743	3,307
25	1,744	3,302
26	1,752	3,308
27	1,746	3,301
28	1,743	3,305
29	1,747	3,307
30	1,747	3,310
31	1,745	3,311
32	1,756	3,297
33	1,751	3,308
34	1,750	3,310
35	1,754	3,312
36	1,755	3,312
37	1,751	3,302
38	1,747	3,307
39	1,747	3,308
40	1,745	3,308
41	1,751	3,302
42	1,745	3,310
43	1,751	3,309
44	1,748	3,312
45	1,745	3,315
46	1,754	3,313
47	1,749	3,301
48	1,752	3,300
49	1,747	3,301
50	1,751	3,303
Average	1,75	3,31
Cmk	2,58	7,40

Acceptance criteria: Cmk>= 2

END

04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表 ／04 APPLICATOR CONSUMABLE PARTS LIST

製品番号 PRODUCT No.	C0100-4076	端子品番 TERMINAL No.	7116-4453C



No.	部品番号 PARTS No.	図番 DRW. No.	部品名称 PARTS NAME
1	7116-4453XW		ﾜｲﾔｰｸﾘﾝﾊﾟｰ WIRE CRIMPER
2	7116-4453XIC		ｲﾝｼｭｸﾘﾝﾊﾟｰ INSULATION CRIMPER
3	7116-4453XAC		ｱﾝﾋﾞﾙ ANVIL
4	7116-4453CXJE		ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ ANVIL HOLDER
5	7116-4453CXYY		ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ SUPPORTING STOPPER
6	7116-4453CXYB		ﾍﾞｰｽ BASE
7	7116-4453CXYH		ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB TERMINAL GUIDE PLATE B
8	48A47016	001	電線押さえ WIRE HOLDER
9	48A47017	002	切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ CUTTING PUNCH & WIRE HOLDER
10	48A47020	A05 ①	ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA TERMINAL GUIDE PLATE A
11	48A47022	001 ①	ﾀｰﾐﾅﾙ押さえ TERMINAL HOLDER
12	48A47024	002	ｼｬｰﾌﾟﾚｰﾄﾞ SHEARBLADE
13	48A47025	002/101	ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ OUTER SHEARBLADE
14	48A19007	025 ①	ｲﾝｼｭ調整ｺﾏ INSULATION ADJUSTING PIECE
15	48A19019	014	ﾌﾞｯｼｭ BUSH

No.	部品番号 PARTS No.	図番 DRW. No.	部品名称 PARTS NAME
16	48A47014	001	送りｶﾑ FEEDING CAM
17	48A47013		送り爪 FEEDING CLAW
18	48A19100	005	電線ｽﾄｯﾊﾟｰ Assy WIRE STOPPER Assy
19	48A19047	002 ②	端子掻き落とし TERMINAL SCRAPER
20	48A47031		戻しｽﾌﾟﾘﾝｸﾞ RETURN SPRING
21	48A47032	001	ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ SUPPORTING STOPPER SPRING
22	48A19017	003	送り爪ｽﾌﾟﾘﾝｸﾞ FEEDING CLAW SPRING
23	48A19023	001	電線押さえｽﾌﾟﾘﾝｸﾞ WIRE HOLDER SPRING
24	48A19074		ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ TERMINAL HOLDER SPRING
25	48A19050		ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ SHEARBLADE SPRING
26	48A19999		ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ TERMINAL OIL UNIT
27	7116-4453CXKP		ﾌﾞﾗｹｯﾄ BRACKET
<ｵﾌﾟｼｮﾝ OPTION>			
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK	DATE	REVISION RECORD	No.	CHECKED
②	2010/9/13	003→002	10H-046	Y.NOZAWA
①	2007/12/20	CHANGED No.	QX7	T,Suzuki

APPRICATION POST	
専用機	
DESIGNED DATE	
2006/9/4	
APPROVED	DESIGNED
松田	八木
2006/9/4	2006/9/4

ISSUED '12.03.08 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED MARK

YAZAKI