APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1803E040

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164453 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-4453-06	*	**04 SIDE FEED**	**YSD_2018_001~008**	*







Anvil		
7116-4453XAC		(N)
CW (c) 2,63	*CW (i)* 3,53	




Wire Crimper	
7116-4453XW	(1)
CW 2,61	

Insulation Crimper	
7116-4453XIC	(3)
CW 3,53	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

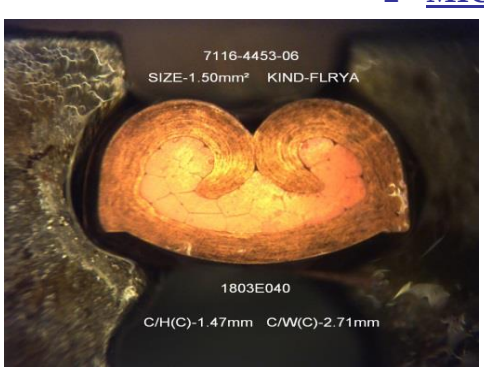
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

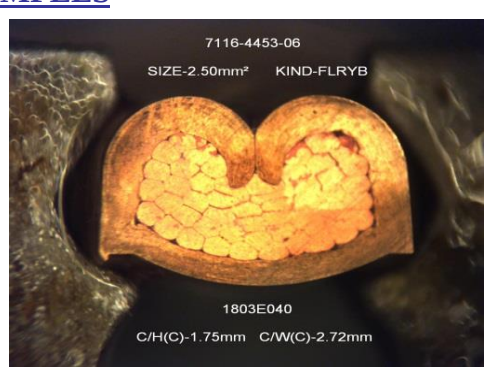
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,47	1,47	3,49
	+/-0.03		



	NOMINAL	AVERAGE	Cmk
mm	1,75	1,75	2,72
	+/-0.03		

REMARKS:

Aplicable wire range:1.50mm²~2.50mm².
Wire 1.50mm² C/W(I)-3.52mm
Wire 2.50mm² C/W(C)-3.61mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
		
Date: 2018-mar-22	Date: 2018-mar-20	Date: 2018-mar-20

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1803E040

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1,5 mm^2

Nominal Cr. Height:	1,47	2,9	mm
+/-	0,03	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,474	2,905
2	1,470	2,905
3	1,467	2,900
4	1,472	2,905
5	1,465	2,901
6	1,468	2,903
7	1,472	2,912
8	1,468	2,914
9	1,466	2,912
10	1,467	2,909
11	1,469	2,913
12	1,466	2,901
13	1,469	2,907
14	1,471	2,911
15	1,466	2,907
16	1,469	2,905
17	1,470	2,906
18	1,467	2,903
19	1,469	2,905
20	1,472	2,912
21	1,467	2,904
22	1,472	2,903
23	1,465	2,913
24	1,470	2,904
25	1,472	2,902
26	1,467	2,908
27	1,471	2,900
28	1,471	2,912
29	1,471	2,908
30	1,463	2,909
31	1,472	2,911
32	1,472	2,906
33	1,473	2,911
34	1,469	2,904
35	1,467	2,906
36	1,467	2,910
37	1,468	2,909
38	1,471	2,901
39	1,466	2,903
40	1,465	2,907
41	1,464	2,904
42	1,471	2,904
43	1,466	2,909
44	1,472	2,901
45	1,465	2,909
46	1,470	2,908
47	1,464	2,900
48	1,469	2,900
49	1,470	2,907
50	1,467	2,911
Average	1,47	2,91
Cmk	3,49	7,74

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Total wire size: 2,5 mm^2

Nominal Cr. Height:	1,75	3,3	mm
+/-	0,03	0,1	mm

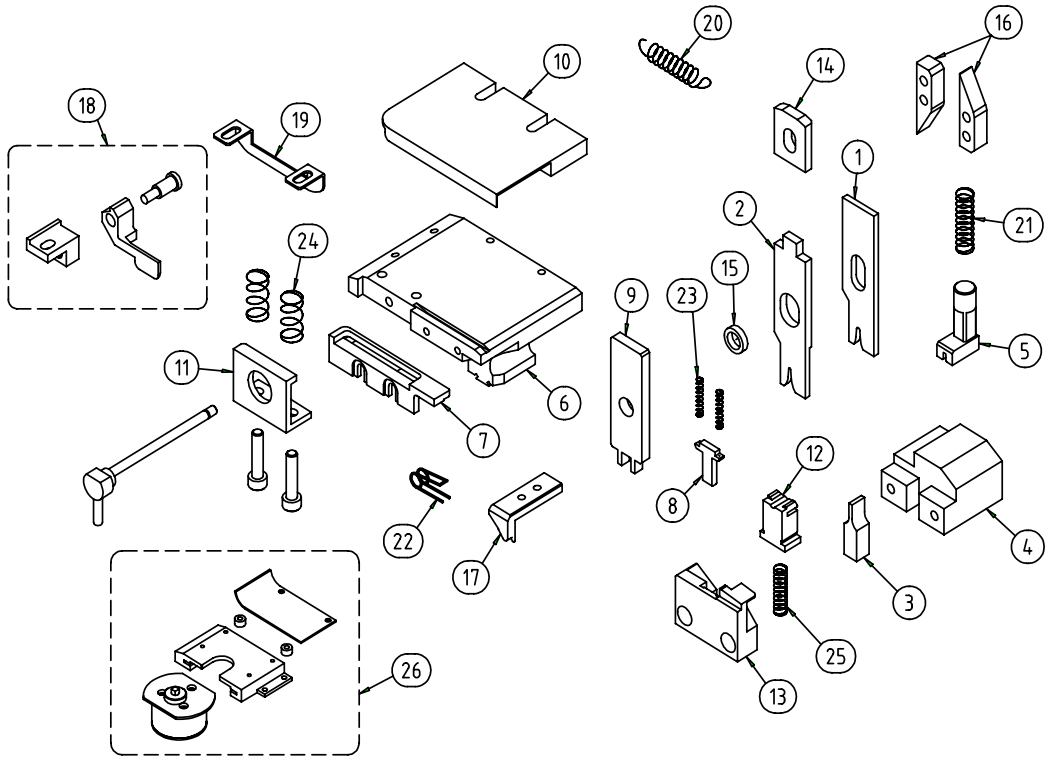
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,759	3,307
2	1,755	3,304
3	1,753	3,303
4	1,756	3,311
5	1,758	3,309
6	1,752	3,300
7	1,758	3,308
8	1,752	3,311
9	1,756	3,311
10	1,754	3,304
11	1,755	3,310
12	1,754	3,301
13	1,760	3,303
14	1,753	3,308
15	1,758	3,305
16	1,756	3,307
17	1,754	3,299
18	1,750	3,307
19	1,747	3,306
20	1,758	3,296
21	1,752	3,306
22	1,758	3,300
23	1,754	3,296
24	1,751	3,309
25	1,750	3,302
26	1,750	3,307
27	1,755	3,302
28	1,750	3,305
29	1,756	3,304
30	1,750	3,308
31	1,753	3,303
32	1,749	3,307
33	1,751	3,303
34	1,756	3,307
35	1,752	3,301
36	1,750	3,304
37	1,756	3,297
38	1,750	3,293
39	1,754	3,302
40	1,752	3,295
41	1,750	3,306
42	1,750	3,293
43	1,754	3,300
44	1,750	3,304
45	1,752	3,298
46	1,751	3,293
47	1,747	3,297
48	1,757	3,303
49	1,758	3,293
50	1,750	3,298
Average	1,75	3,30
Cmk	2,72	6,38

Acceptance criteria: Cmk>= 2.0

END

04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表 ／04 APPLICATOR CONSUMABLE PARTS LIST

製品番号 PRODUCT No.	C0100-4076	端子品番 TERMINAL No.	7116-4453C



No.	部品番号 PARTS No.	図番 DRW. No.	部品名称 PARTS NAME
1	7116-4453XW		ﾜｲﾔｰｸﾘﾝﾊﾟｰ WIRE CRIMPER
2	7116-4453XIC		ｲﾝｼｭｸﾘﾝﾊﾟｰ INSULATION CRIMPER
3	7116-4453XAC		ｱﾝﾋﾞﾙ ANVIL
4	7116-4453CXJE		ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ ANVIL HOLDER
5	7116-4453CXYY		ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ SUPPORTING STOPPER
6	7116-4453CXYB		ﾍﾞｰｽ BASE
7	7116-4453CXYH		ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB TERMINAL GUIDE PLATE B
8	48A47016	001	電線押さえ WIRE HOLDER
9	48A47017	002	切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ CUTTING PUNCH & WIRE HOLDER
10	48A47020	A05 ①	ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA TERMINAL GUIDE PLATE A
11	48A47022	001 ①	ﾀｰﾐﾅﾙ押さえ TERMINAL HOLDER
12	48A47024	002	ｼｬｰﾌﾟﾚｰﾄﾞ SHEARBLADE
13	48A47025	002/101	ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ OUTER SHEARBLADE
14	48A19007	025 ①	ｲﾝｼｭ調整ｺﾏ INSULATION ADJUSTING PIECE
15	48A19019	014	ﾌﾞｯｼｭ BUSH

No.	部品番号 PARTS No.	図番 DRW. No.	部品名称 PARTS NAME
16	48A47014	001	送りｶﾑ FEEDING CAM
17	48A47013		送り爪 FEEDING CLAW
18	48A19100	005	電線ｽﾄｯﾊﾟｰ Assy WIRE STOPPER Assy
19	48A19047	002 ②	端子掻き落とし TERMINAL SCRAPER
20	48A47031		戻しｽﾌﾟﾘﾝｸﾞ RETURN SPRING
21	48A47032	001	ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ SUPPORTING STOPPER SPRING
22	48A19017	003	送り爪ｽﾌﾟﾘﾝｸﾞ FEEDING CLAW SPRING
23	48A19023	001	電線押さえｽﾌﾟﾘﾝｸﾞ WIRE HOLDER SPRING
24	48A19074		ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ TERMINAL HOLDER SPRING
25	48A19050		ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ SHEARBLADE SPRING
26	48A19999		ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ TERMINAL OIL UNIT
27	7116-4453CXKP		ﾌﾞﾗｹｯﾄ BRACKET
<ｵﾌﾟｼｮﾝ OPTION>			
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK	DATE	REVISION RECORD	No.	CHECKED
②	2010/9/13	003→002	10H-046	Y.NOZAWA
①	2007/12/20	CHANGED No.	QX7	T,Suzuki

APPRICATION POST	
専用機	
DESIGNED DATE	
2006/9/4	
APPROVED	DESIGNED
松田	八木
2006/9/4	2006/9/4

ISSUED '12.03.08 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED MARK

YAZAKI