PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1710E132

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72961294 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7296-1294-02	**7158-3038-70**	**04 SIDE FEED**	**YSD-3500116815**	*





Anvil		
7296-1294XAD		(N)
CW (c) 1,64	*CW (i)* 3,20	







Wire Crimper	
7296-1294XW	(N)
CW 1,62	

Insulation Crimper	
7296-1294XID	(N)
CW 3,20	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,04	1,04	2,70
	+/-0.03		

	NOMINAL	AVERAGE	Cmk
mm	1,14	1,14	2,45
	+/-0.03		

REMARKS:

Aplicable wire range-0.75mm²~1.00mm²
Wire 0.75mm² C/W(I)-3.16mm
Wire 1.00mm² C/W(I)-3.19mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2019-abr-08	Date: 2019-abr-05	Date: 2019-abr-05

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1710E132

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,75 mm²

Nominal Cr. Height:	1,04	3	mm
+/-	0,03	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,046	3,009
2	1,044	3,014
3	1,046	3,009
4	1,049	3,004
5	1,045	3,001
6	1,042	3,008
7	1,040	3,012
8	1,044	3,006
9	1,042	3,010
10	1,038	3,017
11	1,037	3,010
12	1,039	3,004
13	1,035	3,020
14	1,037	3,019
15	1,043	3,010
16	1,045	3,006
17	1,040	3,006
18	1,048	3,019
19	1,042	3,006
20	1,040	3,010
21	1,044	3,025
22	1,040	3,014
23	1,038	3,012
24	1,037	3,015
25	1,039	3,010
26	1,038	3,019
27	1,036	3,012
28	1,042	3,007
29	1,037	3,004
30	1,036	3,013
31	1,039	3,019
32	1,035	3,010
33	1,036	3,007
34	1,036	3,013
35	1,035	3,006
36	1,043	3,008
37	1,036	3,009
38	1,042	3,007
39	1,038	3,024
40	1,035	3,015
41	1,039	3,020
42	1,044	3,020
43	1,039	3,008
44	1,043	3,017
45	1,042	3,010
46	1,038	3,020
47	1,044	3,018
48	1,038	3,016
49	1,035	3,022
50	1,040	3,007
Average	1,04	3,01
Cmk	2,70	4,99

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 1 mm²

Nominal Cr. Height:	1,14	3,1	mm
+/-	0,03	0,1	mm

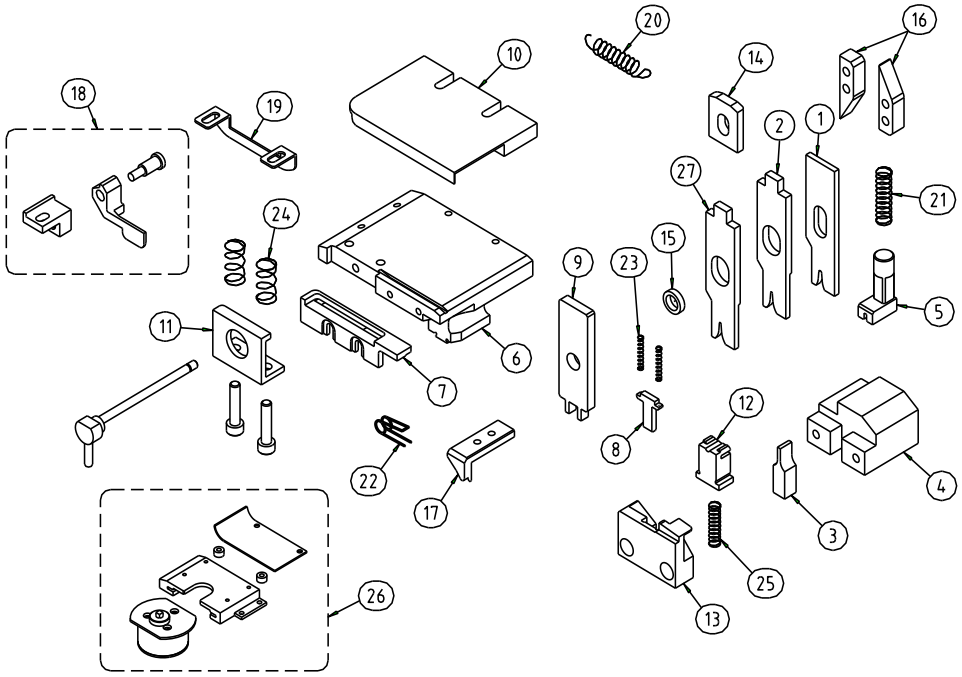
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,141	3,111
2	1,143	3,104
3	1,147	3,104
4	1,148	3,104
5	1,140	3,113
6	1,138	3,102
7	1,144	3,109
8	1,138	3,105
9	1,139	3,104
10	1,139	3,115
11	1,138	3,107
12	1,138	3,101
13	1,136	3,112
14	1,142	3,103
15	1,146	3,109
16	1,138	3,099
17	1,136	3,108
18	1,141	3,099
19	1,134	3,107
20	1,135	3,103
21	1,144	3,116
22	1,138	3,106
23	1,143	3,114
24	1,147	3,102
25	1,141	3,109
26	1,141	3,100
27	1,143	3,114
28	1,136	3,101
29	1,138	3,107
30	1,146	3,102
31	1,148	3,111
32	1,147	3,097
33	1,138	3,103
34	1,145	3,101
35	1,147	3,099
36	1,139	3,110
37	1,142	3,099
38	1,145	3,109
39	1,139	3,099
40	1,137	3,112
41	1,136	3,104
42	1,145	3,098
43	1,141	3,109
44	1,144	3,096
45	1,147	3,102
46	1,143	3,098
47	1,144	3,100
48	1,144	3,099
49	1,138	3,104
50	1,144	3,098
Average	1,14	3,10
Cmk	2,45	5,94

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-7117	TERMINAL No. 端子品番	7296-1294 ① DD
共通品番	– – – – – – – –		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7296-1294XW ①		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	-001	FEEDING CLAW 送り爪
2	7296-1294XID ①		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7296-1294XAD ①		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	-001	TERMINAL SCRAPER 端子掻き落とし
4	7296-1294XJE ①		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7296-1294XYY ①		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7296-1294XYB ①		BASE ﾍﾞｰｽ	22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7296-1294XYH ①		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	-002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	-003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	-A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	-001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7296-1294XKP ①		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	-001	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ	27	~~7296-1294XQ ①~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	-003	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	-020	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
15	48A19019	-032	BUSH ﾌﾞｯｼｭ	14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	-001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					PTC		
					DESIGNED DATE 設計日		
					27-05-2017		
					APPROVED 承認	DESIGNED 設計	
①	09-10-2017	Change No.7216-5554-9 → 7296-1294	PTC	C.F.Almeida	H.Hasegawa	C.F.Almeida	
					27-05-2017	27-05-2017	