APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1710E133

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72961294 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7296-1294-02	**7158-3038-70**	**04 SIDE FEED**	**YSD-3500099496**	*







Anvil		
7296-1294XAD		(N)
CW (c) 1,64	*CW (i)* 3,20	





Wire Crimper		
7296-1294XW		(N)
CW 1,62		

Insulation Crimper		
7296-1294XID		(N)
CW 3,20		

1 - VISUAL CHECK ITEMS

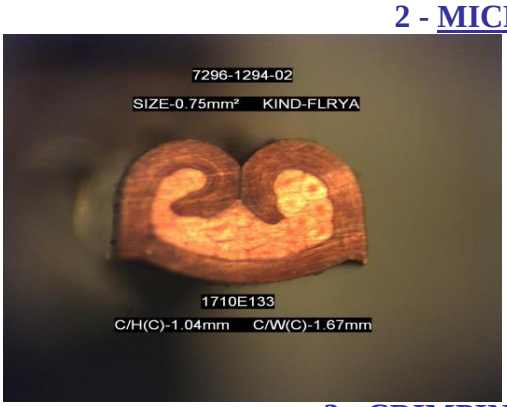
O - ok **X** - ng **NA** - not aplicable

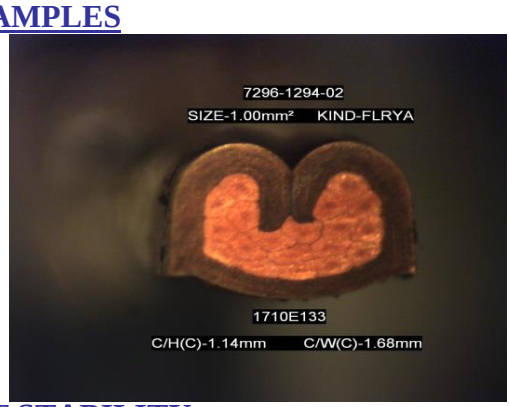
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,04	1,04	3,49
	+/-0,03		

	NOMINAL	AVERAGE	Cmk
mm	1,14	1,14	3,15
	+/-0,03		

REMARKS:

Aplicable wire range 0.75mm²~1.00mm²
Wire 0.75mm² C/W(I)-3.07mm
Wire 1.00mm² C/W(I)-3.16mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2018-nov-20	Date: 2018-nov-16	Date: 2018-nov-16

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1710E133

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,75 mm²

Nominal Cr. Height:	1,04	3	mm
+/-	0,03	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,046	3,002
2	1,044	2,999
3	1,039	2,998
4	1,041	3,006
5	1,044	2,999
6	1,039	3,004
7	1,045	3,002
8	1,043	3,003
9	1,046	2,996
10	1,045	3,000
11	1,042	3,003
12	1,044	2,998
13	1,042	3,003
14	1,047	3,002
15	1,047	3,006
16	1,044	3,006
17	1,049	3,002
18	1,045	3,002
19	1,045	3,000
20	1,042	3,000
21	1,044	2,999
22	1,041	2,999
23	1,042	2,999
24	1,042	3,000
25	1,044	3,001
26	1,039	3,000
27	1,042	3,000
28	1,041	3,000
29	1,045	3,000
30	1,045	2,995
31	1,046	2,997
32	1,044	2,996
33	1,040	2,996
34	1,044	3,000
35	1,044	2,998
36	1,045	2,996
37	1,042	3,001
38	1,040	3,001
39	1,038	3,001
40	1,043	2,998
41	1,045	3,000
42	1,043	2,997
43	1,043	2,998
44	1,044	2,996
45	1,043	2,992
46	1,043	2,992
47	1,040	2,992
48	1,041	2,986
49	1,043	2,989
50	1,051	2,987
Average	1,04	3,00
Cmk	3,49	7,59

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 1 mm²

Nominal Cr. Height:	1,14	3,15	mm
+/-	0,03	0,1	mm

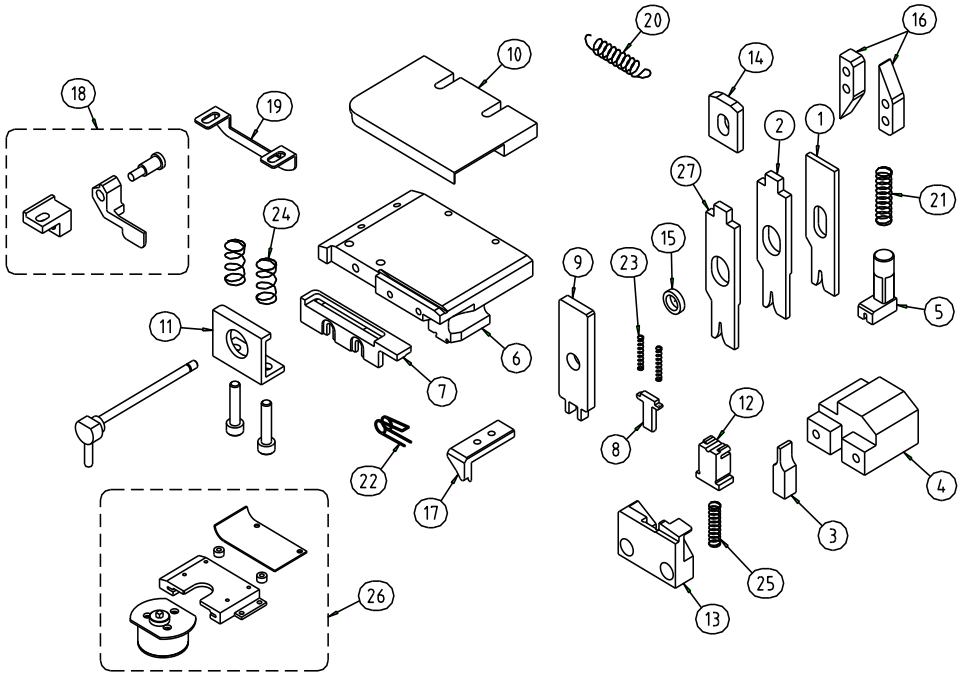
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,140	3,153
2	1,142	3,149
3	1,137	3,154
4	1,143	3,152
5	1,141	3,155
6	1,142	3,157
7	1,142	3,155
8	1,144	3,157
9	1,141	3,155
10	1,142	3,155
11	1,142	3,159
12	1,141	3,156
13	1,143	3,157
14	1,139	3,152
15	1,144	3,155
16	1,149	3,154
17	1,145	3,155
18	1,142	3,151
19	1,146	3,152
20	1,139	3,152
21	1,141	3,162
22	1,148	3,161
23	1,143	3,154
24	1,146	3,156
25	1,143	3,149
26	1,145	3,158
27	1,144	3,157
28	1,140	3,153
29	1,143	3,159
30	1,141	3,154
31	1,139	3,154
32	1,143	3,155
33	1,141	3,155
34	1,139	3,157
35	1,138	3,165
36	1,144	3,166
37	1,140	3,147
38	1,149	3,145
39	1,141	3,151
40	1,141	3,157
41	1,139	3,155
42	1,139	3,155
43	1,141	3,151
44	1,140	3,161
45	1,142	3,154
46	1,143	3,152
47	1,136	3,161
48	1,146	3,153
49	1,147	3,144
50	1,137	3,148
Average	1,14	3,15
Cmk	3,15	7,19

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-7117	TERMINAL No. 端子品番	7296-1294 ① DD
共通品番	– – – – – – – –		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7296-1294XW ①		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	-001	FEEDING CLAW 送り爪
2	7296-1294XID ①		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7296-1294XAD ①		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	-001	TERMINAL SCRAPER 端子掻き落とし
4	7296-1294XJE ①		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7296-1294XYY ①		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7296-1294XYB ①		BASE ﾍﾞｰｽ	22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7296-1294XYH ①		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	-002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	-003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	-A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	-001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7296-1294XKP ①		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	-001	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ	27	~~7296-1294XQ ①~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	-003	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	-020	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
15	48A19019	-032	BUSH ﾌﾞｯｼｭ	14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	-001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					PTC		
					DESIGNED DATE 設計日		
					27-05-2017		
					APPROVED 承認	DESIGNED 設計	
①	09-10-2017	Change No.7216-5554-9 → 7296-1294	PTC	C.F.Almeida	H.Hasegawa	C.F.Almeida	
					27-05-2017	27-05-2017	