APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1710E137

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71169962 SEQUENCE Nº 4

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-9962-02	**7157-3962-90**	**04 SIDE FEED**	**YSD-XVK81**	*







Anvil		
7116-9962DDXA		(N)
CW (c) 2,02	*CW (i)* 4,00	





Wire Crimper		
7116-9962DDXW		(N)
CW 2,00		

Insulation Crimper		
7116-9962DDXI		(N)
CW 4,00		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

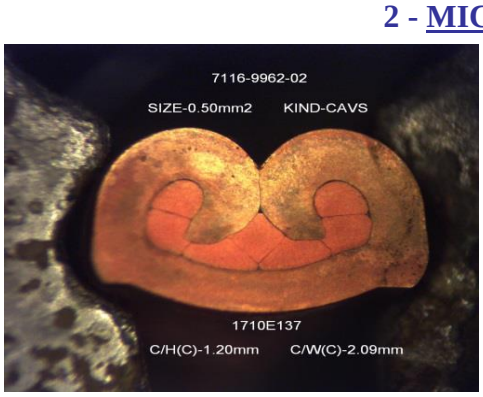
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

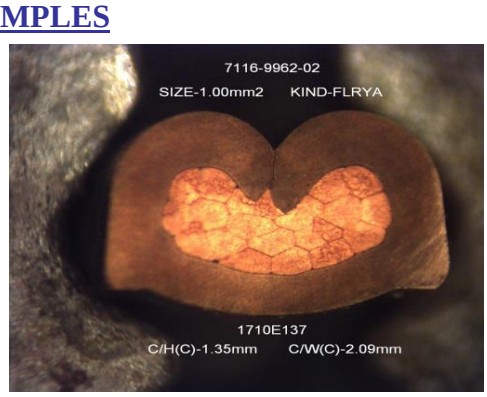
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,2	1,21	4,73
	+/-0,05		

	NOMINAL	AVERAGE	Cmk
mm	1,35	1,36	6,07
	+/-0,05		

REMARKS:

Aplicable wire range-0.50~1.00mm2
Size 0.50mm2 C/W(I)-4.04mm
Size 1.00mm2 C/W(I)-4.07mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
Date: 2017-nov-15	Date: 2017-nov-14	Date: 2017-nov-14

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1710E137

LOWER WIRE KIND & SIZE

Wire kind: CAVS

Total wire size: 0,5 mm^2

Nominal Cr. Height:	1,2	3,35	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,204	3,351
2	1,207	3,355
3	1,204	3,353
4	1,201	3,354
5	1,203	3,358
6	1,205	3,355
7	1,208	3,352
8	1,205	3,355
9	1,201	3,358
10	1,204	3,362
11	1,207	3,354
12	1,210	3,358
13	1,203	3,354
14	1,201	3,352
15	1,203	3,355
16	1,206	3,358
17	1,209	3,356
18	1,207	3,353
19	1,205	3,352
20	1,205	3,354
21	1,210	3,357
22	1,208	3,358
23	1,204	3,355
24	1,203	3,358
25	1,206	3,354
26	1,209	3,357
27	1,208	3,358
28	1,207	3,360
29	1,204	3,359
30	1,207	3,357
31	1,211	3,355
32	1,215	3,355
33	1,212	3,360
34	1,209	3,366
35	1,212	3,356
36	1,210	3,359
37	1,207	3,360
38	1,204	3,358
39	1,206	3,356
40	1,211	3,354
41	1,207	3,355
42	1,205	3,358
43	1,206	3,366
44	1,209	3,358
45	1,207	3,355
46	1,203	3,353
47	1,205	3,355
48	1,208	3,356
49	1,205	3,362
50	1,203	3,356
Average	1,21	3,36
Cmk	4,73	9,73

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1,35	3,95	mm
+/-	0,05	0,05	mm

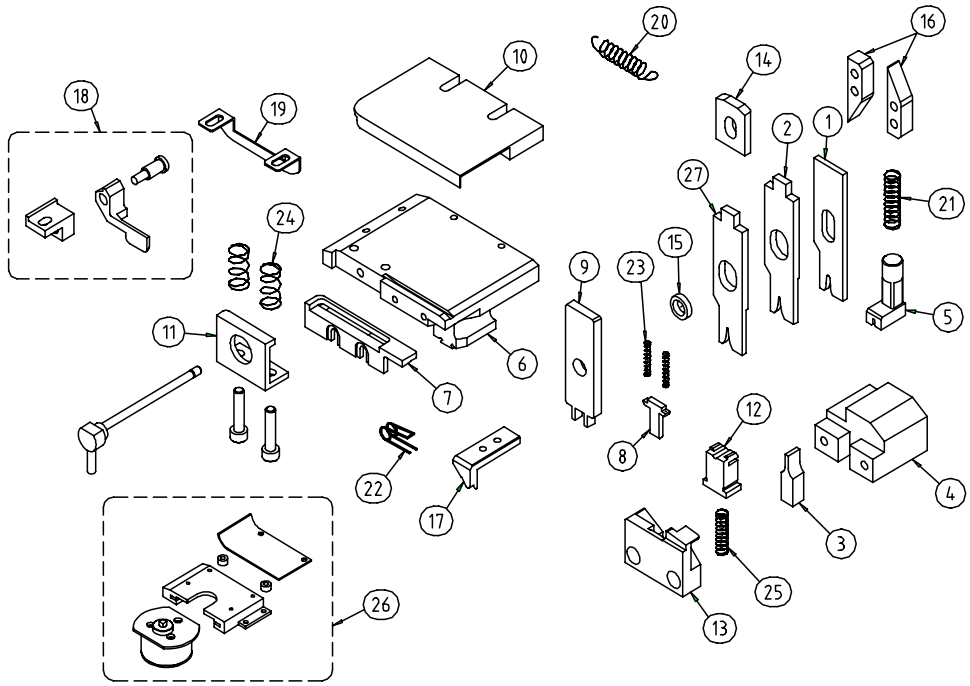
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,352	3,960
2	1,357	3,964
3	1,353	3,961
4	1,350	3,959
5	1,353	3,962
6	1,355	3,963
7	1,357	3,961
8	1,353	3,959
9	1,351	3,957
10	1,353	3,956
11	1,356	3,957
12	1,360	3,959
13	1,358	3,961
14	1,355	3,959
15	1,355	3,958
16	1,358	3,956
17	1,361	3,954
18	1,358	3,957
19	1,358	3,957
20	1,356	3,960
21	1,353	3,958
22	1,355	3,956
23	1,357	3,955
24	1,357	3,954
25	1,355	3,956
26	1,355	3,958
27	1,357	3,959
28	1,360	3,958
29	1,358	3,958
30	1,357	3,957
31	1,356	3,955
32	1,354	3,957
33	1,353	3,957
34	1,355	3,960
35	1,357	3,958
36	1,357	3,958
37	1,358	3,957
38	1,355	3,956
39	1,354	3,957
40	1,355	3,958
41	1,357	3,959
42	1,355	3,960
43	1,354	3,959
44	1,352	3,957
45	1,351	3,956
46	1,355	3,955
47	1,352	3,957
48	1,355	3,959
49	1,352	3,958
50	1,356	3,955
Average	1,36	3,96
Cmk	6,07	6,46

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1699	TERMINAL No. 端子品番	7116-9962DD
Common PN 共通品番	-	-	-
	-	-	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-9962XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-9962XID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-9962XAD		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7116-9962XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-9962XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-9962XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-9962XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A05	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-9962XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	002	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	<OPTION ｵﾌﾟｼｮﾝ>			
14	48A19007	010 ①②	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	032	BUSH ﾌﾞｯｼｭ	14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	005②	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	
					HIB	
					DESIGNED DATE 設計日	
					2007/5/22	
②	2009/4/7	016→010 001→005	QX7	C,Abe	APPROVED 承認	DESIGNED 設計
①	2007/6/21	017→016	QX7	T,Suzuki	K,Hiraguchi	T,Suzuki
					2007/5/22	2007/5/22

ISSUED '11.10.20 YAZAKI PARTS CO.LTD. HIB MACHINE PRODUCT DEP.

ISSUED 発行