APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1710E139

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71151843 SEQUENCE Nº 1

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7115-1843-02	**7157-3039-70**	**04 SIDE FEED**	**YSD-XVK81**	*







Anvil		
7115-1843DDXA		(1)
CW (c) 2,52	*CW (i)* 4,30	





Wire Crimper		
7115-1843DDXW		(N)
CW 2,50		

Insulation Crimper		
7115-1843DDXI		(N)
CW 4,30		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

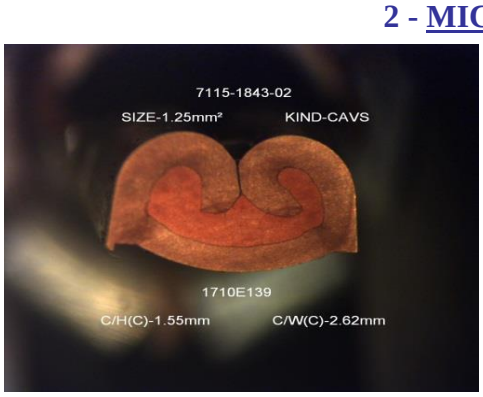
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

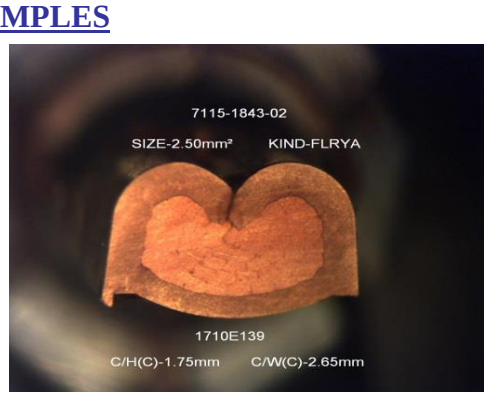
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,55	1,55	4,84
	+/-0.05		



	NOMINAL	AVERAGE	Cmk
mm	1,75	1,74	3,96
	+/-0.05		

REMARKS:

Aplicable wire range >1.00mm²~2.50mm²
Wire 1.25mm² C/W(I)-4.36mm
Wire 2.50mm² C/W(I)-4.38mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
		
Date: 2017-nov-16	Date: 2017-nov-16	Date: 2017-nov-16

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1710E139

LOWER WIRE KIND & SIZE

Wire kind: CAVS

Total wire size: 1,25 mm^2

Nominal Cr. Height:	1,55	3,7	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,552	3,702
2	1,553	3,699
3	1,550	3,703
4	1,550	3,702
5	1,557	3,702
6	1,557	3,701
7	1,549	3,703
8	1,555	3,695
9	1,559	3,705
10	1,549	3,707
11	1,555	3,703
12	1,557	3,705
13	1,552	3,702
14	1,555	3,707
15	1,551	3,701
16	1,557	3,701
17	1,553	3,702
18	1,556	3,702
19	1,550	3,707
20	1,552	3,703
21	1,551	3,707
22	1,553	3,702
23	1,554	3,703
24	1,554	3,702
25	1,558	3,704
26	1,548	3,699
27	1,548	3,702
28	1,555	3,701
29	1,548	3,701
30	1,554	3,702
31	1,551	3,698
32	1,551	3,697
33	1,556	3,694
34	1,552	3,702
35	1,555	3,692
36	1,551	3,702
37	1,549	3,695
38	1,555	3,702
39	1,549	3,702
40	1,550	3,694
41	1,555	3,704
42	1,558	3,706
43	1,549	3,695
44	1,548	3,699
45	1,551	3,701
46	1,546	3,694
47	1,551	3,688
48	1,552	3,706
49	1,547	3,695
50	1,549	3,704
Average	1,55	3,70
Cmk	4,84	7,86

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 2,5 mm^2

Nominal Cr. Height:	1,75	4,5	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,752	4,500
2	1,750	4,505
3	1,746	4,502
4	1,746	4,498
5	1,753	4,498
6	1,750	4,503
7	1,745	4,504
8	1,750	4,494
9	1,748	4,506
10	1,749	4,504
11	1,748	4,497
12	1,745	4,504
13	1,748	4,503
14	1,749	4,500
15	1,744	4,509
16	1,743	4,496
17	1,748	4,499
18	1,744	4,495
19	1,748	4,494
20	1,748	4,500
21	1,743	4,499
22	1,744	4,498
23	1,746	4,497
24	1,746	4,496
25	1,744	4,499
26	1,744	4,500
27	1,748	4,491
28	1,740	4,502
29	1,743	4,503
30	1,741	4,492
31	1,742	4,499
32	1,745	4,494
33	1,743	4,499
34	1,744	4,499
35	1,745	4,494
36	1,748	4,497
37	1,745	4,498
38	1,745	4,494
39	1,741	4,503
40	1,744	4,493
41	1,741	4,501
42	1,740	4,501
43	1,738	4,487
44	1,737	4,494
45	1,740	4,495
46	1,738	4,497
47	1,739	4,507
48	1,742	4,508
49	1,743	4,495
50	1,739	4,501
Average	1,74	4,50
Cmk	3,96	7,18

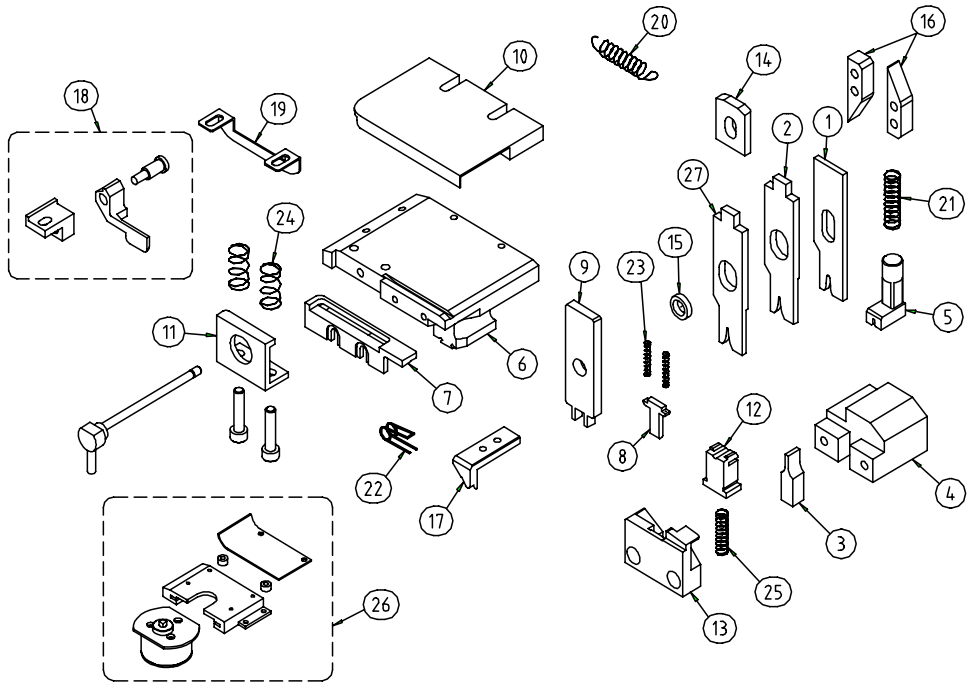
Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1189	TERMINAL No. 端子品番	7115-1843DD

Common PN 共通品番	929975-1	929975-3	-	-
	-	-		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7115-1843XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7115-1843XID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7115-1843XAD		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7115-1843XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7115-1843XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7115-1843XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7115-1843XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7115-1843XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	002	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	<OPTION ｵﾌﾟｼｮﾝ>			
14	48A19007	016	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	037	BUSH ﾌﾞｯｼｭ	14	48A47042	002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					HIB		
					DESIGNED DATE 設計日		
					2008/2/26		
					APPROVED 承認	DESIGNED 設計	
					T,Maki	T,Suzuki	
					2008/2/26	2008/2/26	

ISSUED
'11.08.08
YAZAKI PARTS CO.LTD. HIB MACHINE PRODUCT DEP.