APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1710E141

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71151839 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7115-1839-02	**7157-3038-40**	**04 SIDE FEED**	**YSD-XVK81**	*







Anvil		
7115-1839DDXA		(A)
CW (c) 2,02	*CW (i)* 4,00	





Wire Crimper	
7115-1839DDXW	(A1)
CW 2,00	

Insulation Crimper	
7115-1839DDXI	(A1)
CW 4,00	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

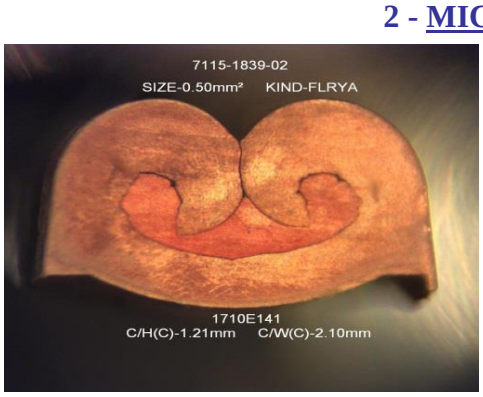
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

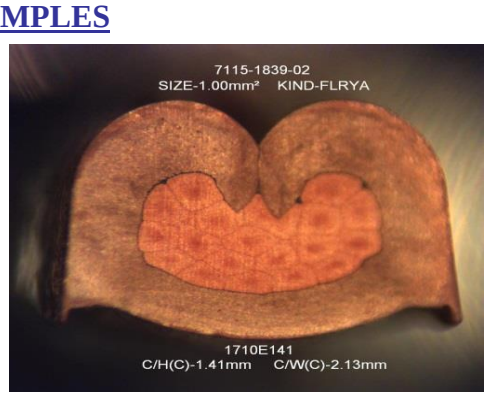
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,2	1,20	2,77
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1,4	1,41	2,48
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm².
Size 0.50mm² C/W(I)-4.00mm
Size 1.00mm² C/W(I)-4.02mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
		Vitor Hugo
Date: 2017-nov-20	Date: 2017-nov-17	Date: 2017-nov-16

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1710E141

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	1,2	3,9	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,209	3,902
2	1,202	3,911
3	1,197	3,897
4	1,209	3,907
5	1,200	3,907
6	1,196	3,897
7	1,208	3,910
8	1,209	3,900
9	1,195	3,897
10	1,203	3,902
11	1,209	3,902
12	1,202	3,893
13	1,205	3,904
14	1,209	3,909
15	1,199	3,910
16	1,199	3,897
17	1,212	3,911
18	1,208	3,905
19	1,198	3,899
20	1,207	3,897
21	1,211	3,907
22	1,198	3,912
23	1,209	3,900
24	1,213	3,914
25	1,205	3,916
26	1,205	3,899
27	1,203	3,897
28	1,208	3,902
29	1,212	3,913
30	1,200	3,902
31	1,213	3,906
32	1,207	3,894
33	1,198	3,900
34	1,207	3,908
35	1,206	3,887
36	1,200	3,903
37	1,209	3,907
38	1,213	3,897
39	1,199	3,902
40	1,213	3,908
41	1,206	3,894
42	1,197	3,903
43	1,204	3,907
44	1,212	3,909
45	1,200	3,897
46	1,195	3,895
47	1,207	3,904
48	1,212	3,907
49	1,205	3,895
50	1,202	3,905
Average	1,20	3,90
Cmk	2,77	5,15

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1,4	4,1	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,409	4,111
2	1,413	4,104
3	1,398	4,098
4	1,409	4,106
5	1,401	4,095
6	1,397	4,104
7	1,405	4,108
8	1,410	4,099
9	1,401	4,096
10	1,414	4,109
11	1,402	4,109
12	1,407	4,094
13	1,416	4,111
14	1,409	4,116
15	1,403	4,100
16	1,401	4,108
17	1,412	4,117
18	1,418	4,110
19	1,406	4,097
20	1,405	4,106
21	1,413	4,114
22	1,417	4,104
23	1,405	4,112
24	1,402	4,116
25	1,401	4,100
26	1,411	4,098
27	1,411	4,104
28	1,399	4,115
29	1,399	4,102
30	1,402	4,098
31	1,413	4,107
32	1,400	4,111
33	1,409	4,096
34	1,414	4,109
35	1,402	4,111
36	1,397	4,104
37	1,413	4,096
38	1,407	4,107
39	1,400	4,110
40	1,410	4,104
41	1,410	4,092
42	1,399	4,098
43	1,404	4,110
44	1,412	4,103
45	1,405	4,095
46	1,395	4,103
47	1,404	4,110
48	1,409	4,099
49	1,406	4,095
50	1,399	4,102
Average	1,41	4,10
Cmk	2,48	4,79

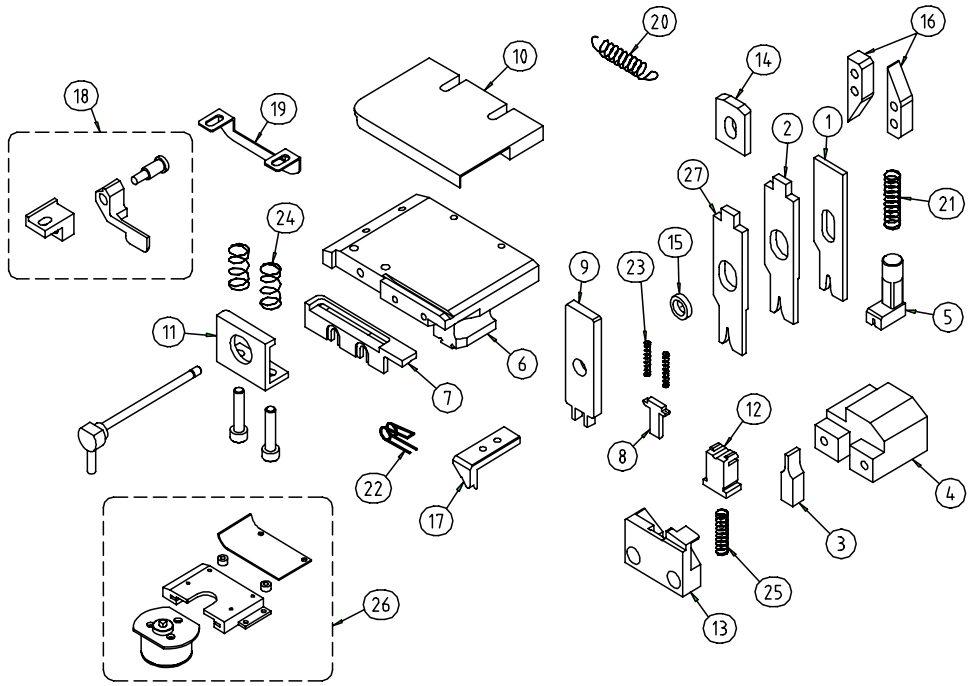
Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1186	TERMINAL No. 端子品番	7115-1839DD

Common PN 共通品番	7115-1847DD	929974-1	929974-3	929974-4
	-	-		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7115-1839XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7115-1839XID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7115-1839XAD		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7115-1839XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7115-1839XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7115-1839XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7115-1839XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A05	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7115-1839XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A19049	002	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	003	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	<OPTION ｵﾌﾟｼｮﾝ>			
14	48A19007	019①	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	030	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	
					HIB	
					DESIGNED DATE 設計日	
					2008/2/26	
					APPROVED 承認	DESIGNED 設計
①	2008/6/2	021→019	QX7	C,Sato	T,Maki	T,Suzuki
					2008/2/26	2008/2/26

ISSUED '11.08.07 YAZAKI PARTS CO.LTD. HIB MACHINE PRODUCT DEP.

ISSUED 発行