APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1710E149

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71161906 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-1906-02	**7157-3961**	**04 SIDE FEED**	**YSD-XVK81**	*







Anvil		
7116-1906DDXA		(N)
CW (c) 2,72	*CW (i)* 3,85	





Wire Crimper	
7116-1906DDXW	(N)
CW 2,70	

Insulation Crimper	
7116-1906DDXI	(N)
CW 3,85	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

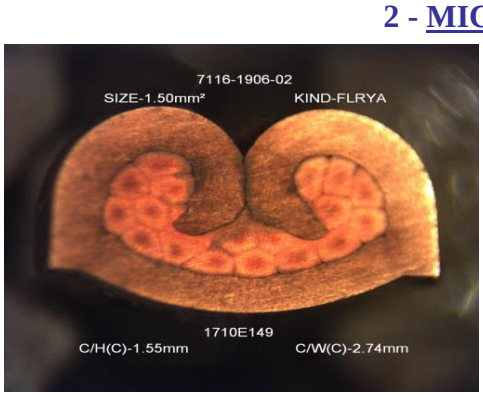
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

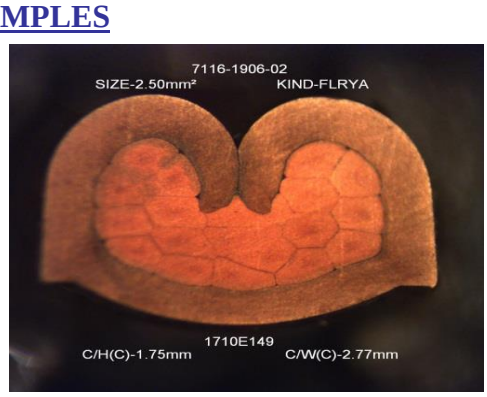
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,55	1,56	4,43
	+/-0,05		



	NOMINAL	AVERAGE	Cmk
mm	1,75	1,75	3,81
	+/-0,05		

REMARKS:

Aplicable Wire Range 1.50mm²~2.50mm²
Wire 1.50mm² C/W(I)-4.07mm
Wire 2.50mm² C/W(I)-4.14mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 678
		
Date: 2017-nov-16	Date: 2017-nov-16	Date: 2017-nov-16

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1710E149

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1,5 mm^2

Nominal Cr. Height:	1,55	4,2	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,555	4,201
2	1,552	4,204
3	1,550	4,206
4	1,554	4,208
5	1,556	4,201
6	1,559	4,195
7	1,562	4,194
8	1,548	4,202
9	1,551	4,206
10	1,552	4,211
11	1,554	4,209
12	1,554	4,208
13	1,551	4,198
14	1,554	4,210
15	1,556	4,213
16	1,553	4,216
17	1,552	4,207
18	1,552	4,200
19	1,554	4,195
20	1,557	4,195
21	1,559	4,193
22	1,555	4,201
23	1,552	4,204
24	1,550	4,206
25	1,554	4,208
26	1,556	4,201
27	1,559	4,195
28	1,562	4,194
29	1,557	4,202
30	1,554	4,206
31	1,553	4,209
32	1,558	4,211
33	1,557	4,209
34	1,557	4,201
35	1,553	4,213
36	1,552	4,201
37	1,556	4,207
38	1,561	4,211
39	1,561	4,210
40	1,555	4,203
41	1,553	4,199
42	1,556	4,201
43	1,557	4,204
44	1,555	4,206
45	1,552	4,208
46	1,550	4,201
47	1,554	4,195
48	1,556	4,194
49	1,559	4,202
50	1,562	4,210
Average	1,56	4,20
Cmk	4,43	5,42

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 2,5 mm^2

Nominal Cr. Height:	1,75	4,4	mm
+/-	0,05	0,1	mm

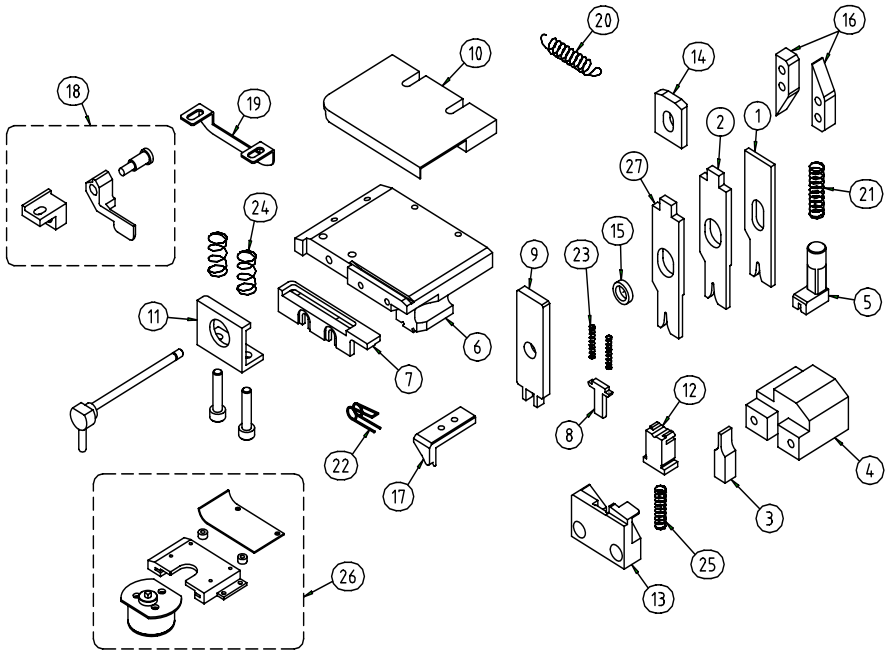
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,754	4,393
2	1,760	4,402
3	1,760	4,408
4	1,752	4,398
5	1,748	4,396
6	1,749	4,402
7	1,754	4,413
8	1,757	4,407
9	1,757	4,413
10	1,755	4,402
11	1,753	4,396
12	1,748	4,402
13	1,753	4,410
14	1,759	4,416
15	1,763	4,416
16	1,759	4,401
17	1,752	4,394
18	1,750	4,393
19	1,748	4,402
20	1,748	4,408
21	1,755	4,398
22	1,758	4,396
23	1,751	4,402
24	1,754	4,413
25	1,760	4,407
26	1,760	4,403
27	1,752	4,399
28	1,748	4,396
29	1,749	4,400
30	1,754	4,409
31	1,757	4,414
32	1,757	4,410
33	1,755	4,399
34	1,753	4,397
35	1,751	4,401
36	1,752	4,410
37	1,755	4,414
38	1,758	4,416
39	1,752	4,402
40	1,754	4,395
41	1,760	4,392
42	1,760	4,404
43	1,752	4,393
44	1,748	4,402
45	1,749	4,408
46	1,754	4,398
47	1,757	4,396
48	1,757	4,402
49	1,755	4,413
50	1,753	4,407
Average	1,75	4,40
Cmk	3,81	4,57

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-0540	TERMINAL No. 端子品番	7116-1906DD



No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
1	7116-1906XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ
2	7116-1906XID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ
3	7116-1906XAD		ANVIL ｱﾝﾋﾞﾙ
4	7116-1906XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ
5	7116-1906XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ
6	7116-1906XYB		BASE ﾍﾞｰｽ
7	7116-1906XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB
8	48A47016	002	WIRE HOLDER 電線押さえ
9	48A47017	004	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ
10	48A47020	A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ
12	48A19049	002 ①	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ
13	48A47025	003/101 ②	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A19007	015 ③④⑥	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ
15	48A19019	032	BUSH ﾌﾞｯｼｭ

No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
16	48A47014	005 ⑤	FEEDING CAM 送りｶﾑ
17	48A47013		FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
23	48A19023	001	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
	7116-1906XKP		BRACKET ﾌﾞﾗｹｯﾄ
27	-		~~STABILIZER CRIMPER~~ ~~ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
〈オプション OPTION〉			
14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
⑥	2007/12/28	017→015	QX7	T,Suzuki
⑤	2007/11/5	001→005	QX7	T,Suzuki
④	2007/9/25	015→017	QX7	T,Suzuki
③	2007/8/6	016→015	QX7	T,Suzuki
②	2007/4/16	002→003	QX7	T,Suzuki
①	2007/4/16	001→002	QX7	T,Suzuki

APPRICATION POST 申請部署	
HIB	
DESIGNED DATE 設計日	
2007/3/7	
APPROVED 承認	DESIGNED 設計
K,Hiraguchi	T,Suzuki
2007/3/7	2007/3/7

ISSUED '13.11.05 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED 発行