APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1710E157

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71161909 SEQUENCE Nº 1

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-1909-02	**7157-3962-90**	**04 SIDE FEED**	**YSD-XVK81**	*







Anvil		
7116-1909DDXA		(N)
CW (c) 1,95	*CW (i)* 3,96	





Wire Crimper		
7116-1909DDXW		(1)
CW 1,93		

Insulation Crimper		
7116-1909DDXI		(1)
CW 3,96		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

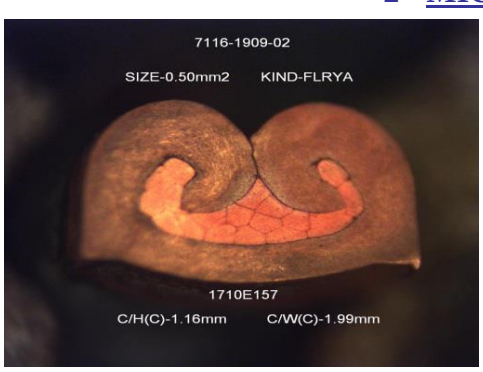
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

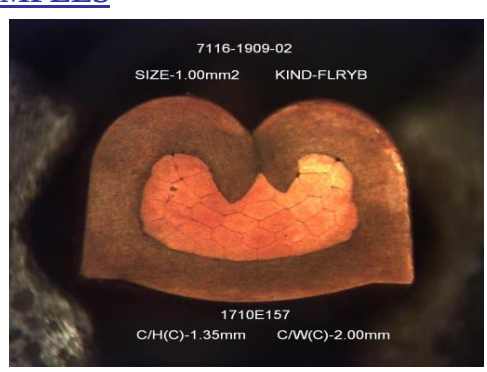
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,15	1,15	3,77
	+/-0,05		



	NOMINAL	AVERAGE	Cmk
mm	1,35	1,35	5,16
	+/-0,05		

REMARKS:

Aplicable wire range-0.50~1.00mm2
Size 0.50mm2 C/W(I)-4.02mm
Size 1.00mm2 C/W(I)-4.07mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
		
Date: 2017-nov-23	Date: 2017-nov-21	Date: 2017-nov-21

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1710E157

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	1,15	4	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,147	4,016
2	1,150	4,014
3	1,147	4,010
4	1,151	4,012
5	1,154	4,014
6	1,151	4,012
7	1,152	4,009
8	1,154	4,010
9	1,151	4,006
10	1,148	4,009
11	1,151	4,013
12	1,152	4,010
13	1,149	4,007
14	1,152	4,009
15	1,147	4,012
16	1,150	4,007
17	1,152	4,010
18	1,149	4,006
19	1,163	4,009
20	1,159	4,013
21	1,161	4,009
22	1,158	4,011
23	1,158	4,014
24	1,161	4,011
25	1,158	4,009
26	1,154	4,011
27	1,156	4,013
28	1,160	4,009
29	1,158	4,007
30	1,155	4,010
31	1,157	4,010
32	1,160	4,008
33	1,156	4,010
34	1,153	4,012
35	1,155	4,010
36	1,160	4,006
37	1,157	4,009
38	1,153	4,011
39	1,156	4,008
40	1,159	4,006
41	1,155	4,009
42	1,152	4,006
43	1,155	4,003
44	1,158	4,006
45	1,155	4,008
46	1,150	4,004
47	1,154	4,001
48	1,157	4,005
49	1,156	4,008
50	1,154	4,004
Average	1,15	4,01
Cmk	3,77	9,81

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1,35	4,2	mm
+/-	0,05	0,1	mm

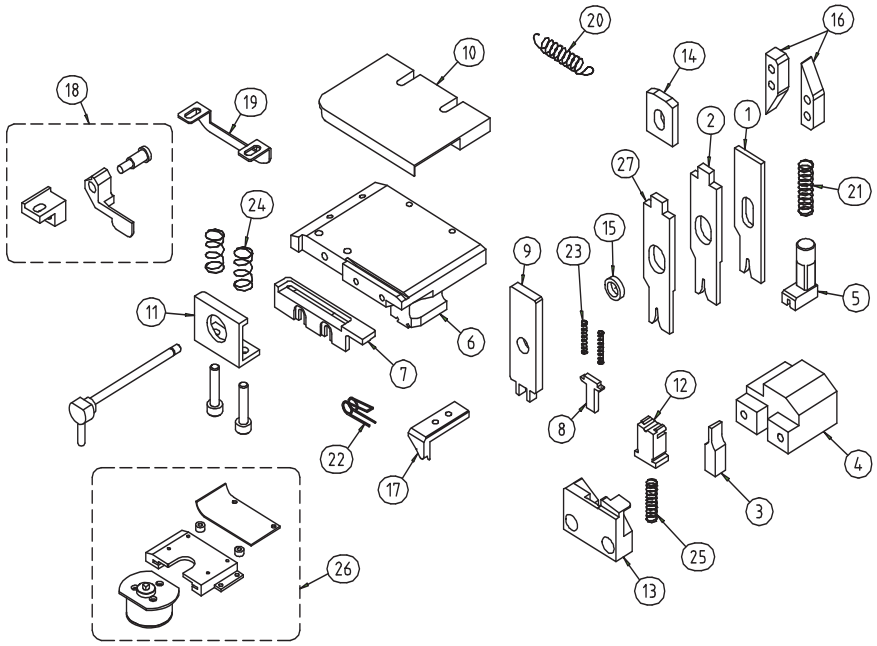
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,345	4,218
2	1,350	4,215
3	1,352	4,217
4	1,349	4,215
5	1,345	4,213
6	1,348	4,210
7	1,350	4,213
8	1,347	4,211
9	1,349	4,204
10	1,352	4,208
11	1,348	4,204
12	1,350	4,201
13	1,352	4,202
14	1,348	4,205
15	1,346	4,201
16	1,348	4,198
17	1,350	4,201
18	1,346	4,204
19	1,349	4,200
20	1,352	4,202
21	1,349	4,205
22	1,347	4,201
23	1,351	4,199
24	1,355	4,201
25	1,349	4,205
26	1,353	4,201
27	1,356	4,200
28	1,352	4,203
29	1,351	4,205
30	1,353	4,202
31	1,356	4,200
32	1,351	4,203
33	1,354	4,206
34	1,356	4,202
35	1,352	4,205
36	1,355	4,207
37	1,358	4,204
38	1,352	4,200
39	1,349	4,203
40	1,352	4,206
41	1,356	4,203
42	1,351	4,200
43	1,354	4,203
44	1,357	4,207
45	1,354	4,204
46	1,350	4,200
47	1,353	4,203
48	1,352	4,199
49	1,353	4,202
50	1,350	4,205
Average	1,35	4,20
Cmk	5,16	6,57

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1410	TERMINAL No. 端子品番	7116-1909DD



No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
1	7116-1909XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ
2	7116-1909XID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ
3	7116-1909XAD		ANVIL ｱﾝﾋﾞﾙ
4	7116-1909XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ
5	7116-1909XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ
6	7116-1909XYB		BASE ﾍﾞｰｽ
7	7116-1909XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB
8	48A47016	002	WIRE HOLDER 電線押さえ
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ
10	48A47020	A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ
12	48A19049	002 ①	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ
13	48A47025	003 ①	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A19007	011 ②	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ
15	48A19019	032	BUSH ﾌﾞｯｼｭ
16	48A47014	001	FEEDING CAM 送りｶﾑ

No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
17	48A47013		FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
23	48A19023	001	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
	7116-1909XKP		BRACKET ﾌﾞﾗｹｯﾄ
27	-		~~STABILIZER CRIMPER~~ ~~ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
	〈オプション OPTION〉		
13	48A47025 ③	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A47042	-002 ②	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
③	2010/6/21	ｷｬﾘｱｶｯﾀｰ用ｱｳﾀｰｼｬｰ追加	QX7	Y.NOZAWA
②	2007/11/5	010→011, 003→002	QX7	T.Suzuki
①	2007/6/13	001→002, 002→003	QX7	T.Suzuki

APPRICATION POST 申請部署	
PTC	
DESIGNED DATE 設計日	
2007/3/30	
APPROVED 承認	DESIGNED 設計
K,Hiraguchi	T,Suzuki
2007/3/30	2007/3/30

ISSUE
2016/02/16
YAZAKI PARTS CO.LTD HAIBARA OFFICE

ISSUED 発行