APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1710E159

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71161909 SEQUENCE Nº 1

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-1909-02	**7157-3962-90**	**04 SIDE FEED**	**YSD-XVK81**	*







Anvil		
7116-1909DDXA		(N)
CW (c) 1,95	*CW (i)* 3,96	





Wire Crimper	
7116-1909DDXW	(1)
CW 1,93	

Insulation Crimper	
7116-1909DDXI	(1)
CW 3,96	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

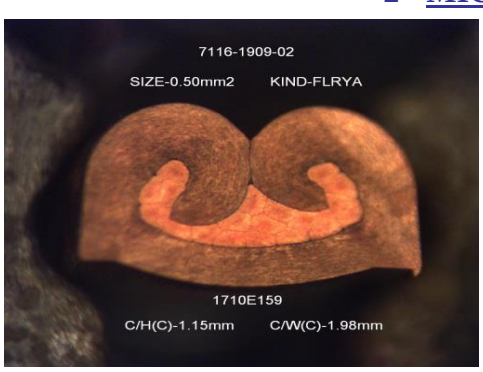
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

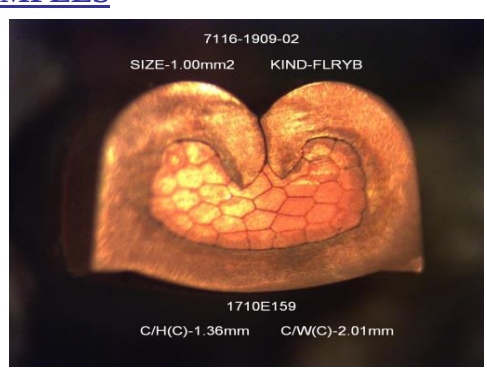
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,15	1,16	6,33
	+/-0,05		

	NOMINAL	AVERAGE	Cmk
mm	1,35	1,36	3,15
	+/-0,05		

REMARKS:

Aplicable wire range-0.50~1.00mm2
Size 0.50mm2 C/W(I)-4.02mm
Size 1.00mm2 C/W(I)-4.07mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
Date: 2017-nov-23	Date: 2017-nov-22	Date: 2017-nov-22

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1710E159

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	1,15	4	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,155	4,007
2	1,161	4,011
3	1,158	4,008
4	1,155	4,005
5	1,157	4,007
6	1,159	4,010
7	1,157	4,009
8	1,154	4,005
9	1,155	4,007
10	1,157	4,009
11	1,155	4,013
12	1,154	4,018
13	1,156	4,020
14	1,158	4,008
15	1,156	4,006
16	1,154	4,007
17	1,156	4,010
18	1,159	4,008
19	1,159	4,005
20	1,154	4,007
21	1,159	4,009
22	1,155	4,007
23	1,151	4,005
24	1,153	4,006
25	1,156	4,008
26	1,159	4,007
27	1,156	4,005
28	1,158	4,006
29	1,162	4,008
30	1,159	4,006
31	1,156	4,004
32	1,158	4,006
33	1,155	4,008
34	1,158	4,007
35	1,160	4,004
36	1,157	4,002
37	1,153	4,004
38	1,155	4,009
39	1,159	4,012
40	1,156	4,009
41	1,154	4,006
42	1,156	4,008
43	1,157	4,011
44	1,156	4,014
45	1,154	4,010
46	1,157	4,007
47	1,159	4,003
48	1,156	4,006
49	1,152	4,012
50	1,155	4,014
Average	1,16	4,01
Cmk	6,33	8,77

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1,35	4,2	mm
+/-	0,05	0,1	mm

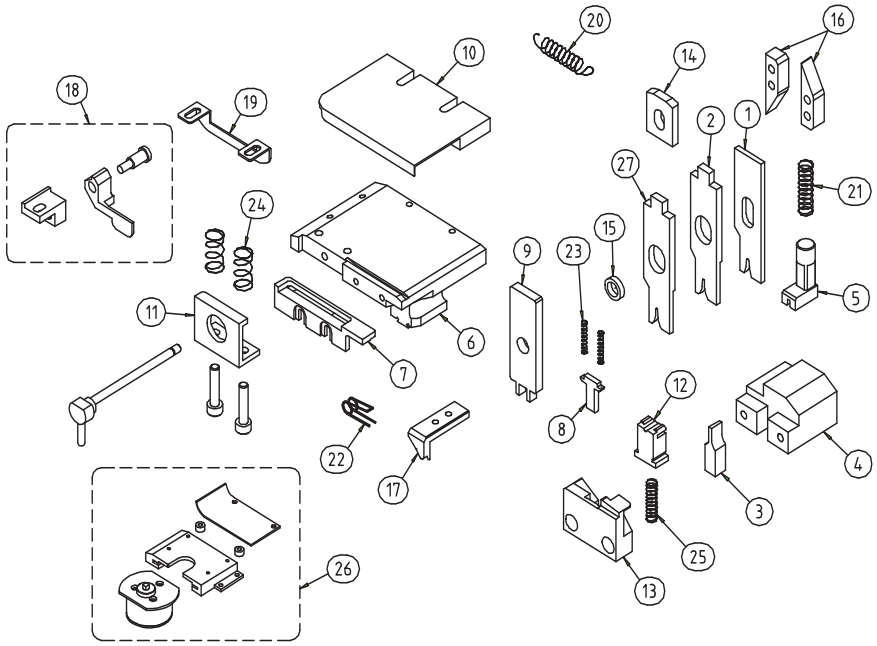
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,354	4,218
2	1,350	4,215
3	1,352	4,217
4	1,355	4,220
5	1,353	4,215
6	1,351	4,212
7	1,353	4,213
8	1,356	4,216
9	1,359	4,213
10	1,356	4,210
11	1,352	4,208
12	1,354	4,210
13	1,357	4,213
14	1,354	4,211
15	1,352	4,208
16	1,354	4,211
17	1,356	4,214
18	1,354	4,212
19	1,352	4,211
20	1,354	4,213
21	1,357	4,211
22	1,355	4,207
23	1,352	4,209
24	1,354	4,208
25	1,356	4,205
26	1,355	4,208
27	1,352	4,211
28	1,353	4,208
29	1,355	4,205
30	1,354	4,208
31	1,354	4,207
32	1,352	4,205
33	1,369	4,206
34	1,367	4,208
35	1,364	4,205
36	1,367	4,202
37	1,363	4,205
38	1,361	4,207
39	1,364	4,203
40	1,360	4,205
41	1,363	4,208
42	1,360	4,207
43	1,357	4,202
44	1,358	4,205
45	1,362	4,207
46	1,359	4,206
47	1,357	4,203
48	1,358	4,205
49	1,362	4,207
50	1,360	4,204
Average	1,36	4,21
Cmk	3,15	7,13

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1410	TERMINAL No. 端子品番	7116-1909DD



No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
1	7116-1909XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ
2	7116-1909XID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ
3	7116-1909XAD		ANVIL ｱﾝﾋﾞﾙ
4	7116-1909XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ
5	7116-1909XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ
6	7116-1909XYB		BASE ﾍﾞｰｽ
7	7116-1909XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB
8	48A47016	002	WIRE HOLDER 電線押さえ
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ
10	48A47020	A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ
12	48A19049	002 ①	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ
13	48A47025	003 ①	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A19007	011 ②	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ
15	48A19019	032	BUSH ﾌﾞｯｼｭ
16	48A47014	001	FEEDING CAM 送りｶﾑ

No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
17	48A47013		FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
23	48A19023	001	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
	7116-1909XKP		BRACKET ﾌﾞﾗｹｯﾄ
27	-		~~STABILIZER CRIMPER~~ ~~ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
	〈オプション OPTION〉		
13	48A47025 ③	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A47042	-002 ②	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
③	2010/6/21	ｷｬﾘｱｶｯﾀｰ用ｱｳﾀｰｼｬｰ追加	QX7	Y.NOZAWA
②	2007/11/5	010→011, 003→002	QX7	T.Suzuki
①	2007/6/13	001→002, 002→003	QX7	T.Suzuki

APPRICATION POST 申請部署	
PTC	
DESIGNED DATE 設計日	
2007/3/30	
APPROVED 承認	DESIGNED 設計
K,Hiraguchi	T,Suzuki
2007/3/30	2007/3/30

ISSUE
2016/02/16
YAZAKI PARTS CO.LTD HAIBARA OFFICE

ISSUED 発行