PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1710E160

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71161909 SEQUENCE Nº 1

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-1909-02	**7157-3962-90**	**04 SIDE FEED**	**YSD-XVK81**	*







Anvil		
7116-1909DDXA		(N)
CW (c) 1,95	*CW (i)* 3,96	




Wire Crimper		
7116-1909DDXW		(1)
CW 1,93		

Insulation Crimper		
7116-1909DDXI		(1)
CW 3,96		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

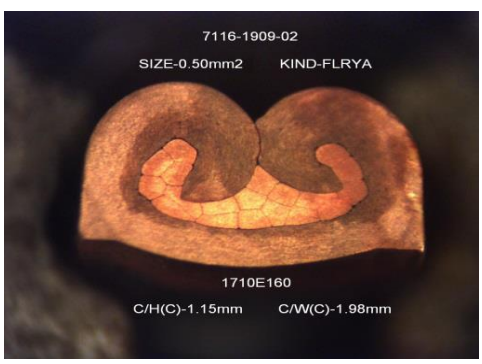
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

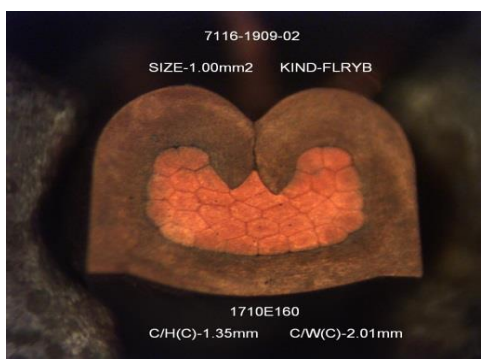
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,15	1,16	3,49
	+/-0,05		

	NOMINAL	AVERAGE	Cmk
mm	1,35	1,35	5,89
	+/-0,05		

REMARKS:

Aplicable wire range-0.50~1.00mm2
Size 0.50mm2 C/W(I)-4.02mm
Size 1.00mm2 C/W(I)-4.08mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
Date: 2017-nov-23	Date: 2017-nov-22	Date: 2017-nov-22

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1710E160

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	1,15	4	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,150	4,001
2	1,151	4,005
3	1,147	4,001
4	1,149	3,998
5	1,152	4,001
6	1,155	4,004
7	1,153	4,002
8	1,156	4,004
9	1,160	4,007
10	1,155	4,004
11	1,151	4,001
12	1,152	4,004
13	1,149	4,007
14	1,153	4,004
15	1,155	4,001
16	1,150	4,002
17	1,148	4,007
18	1,150	4,008
19	1,153	4,010
20	1,150	4,013
21	1,146	4,016
22	1,156	4,012
23	1,160	4,010
24	1,157	4,008
25	1,153	4,010
26	1,156	4,012
27	1,159	4,013
28	1,155	4,009
29	1,157	4,006
30	1,160	4,008
31	1,157	4,011
32	1,161	4,009
33	1,165	4,005
34	1,160	4,008
35	1,156	4,010
36	1,158	4,012
37	1,162	4,009
38	1,158	4,006
39	1,155	4,003
40	1,157	4,008
41	1,159	4,010
42	1,156	4,007
43	1,160	4,003
44	1,162	4,005
45	1,157	4,008
46	1,154	4,005
47	1,156	4,001
48	1,160	4,004
49	1,157	4,007
50	1,154	4,002
Average	1,16	4,01
Cmk	3,49	7,89

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1,35	4,2	mm
+/-	0,05	0,1	mm

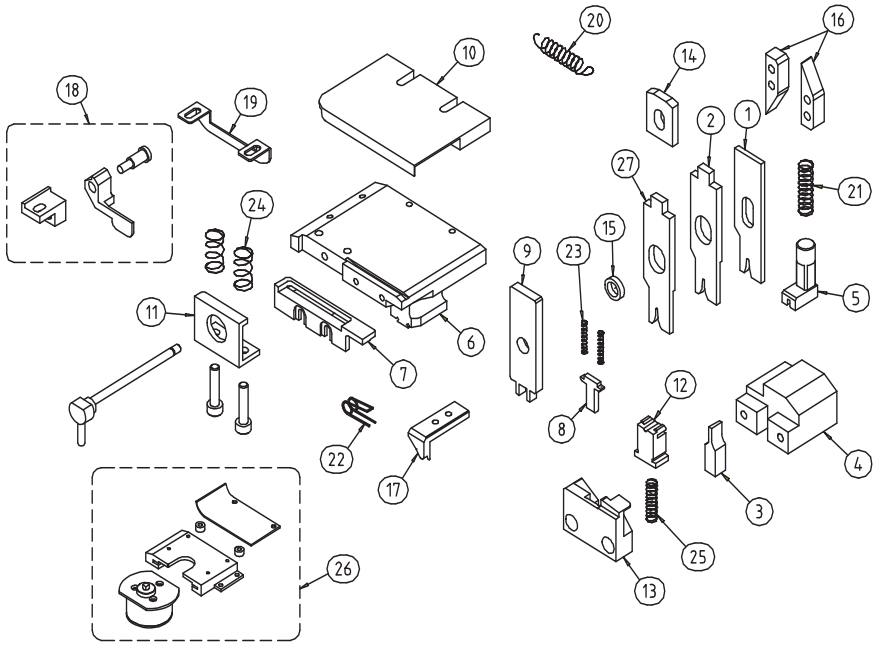
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,356	4,211
2	1,360	4,208
3	1,356	4,204
4	1,351	4,207
5	1,353	4,211
6	1,355	4,208
7	1,352	4,205
8	1,349	4,207
9	1,352	4,211
10	1,354	4,208
11	1,351	4,205
12	1,348	4,201
13	1,352	4,204
14	1,355	4,208
15	1,353	4,207
16	1,349	4,205
17	1,352	4,202
18	1,356	4,205
19	1,353	4,207
20	1,350	4,210
21	1,353	4,213
22	1,355	4,210
23	1,352	4,208
24	1,349	4,206
25	1,350	4,204
26	1,353	4,206
27	1,353	4,209
28	1,350	4,212
29	1,348	4,210
30	1,351	4,207
31	1,355	4,205
32	1,353	4,204
33	1,351	4,206
34	1,348	4,208
35	1,350	4,211
36	1,352	4,209
37	1,354	4,207
38	1,352	4,203
39	1,349	4,207
40	1,349	4,210
41	1,350	4,207
42	1,353	4,203
43	1,349	4,206
44	1,348	4,209
45	1,351	4,212
46	1,355	4,208
47	1,352	4,205
48	1,354	4,202
49	1,358	4,199
50	1,354	4,197
Average	1,35	4,21
Cmk	5,89	9,30

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1410	TERMINAL No. 端子品番	7116-1909DD



No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
1	7116-1909XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ
2	7116-1909XID		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ
3	7116-1909XAD		ANVIL ｱﾝﾋﾞﾙ
4	7116-1909XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ
5	7116-1909XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ
6	7116-1909XYB		BASE ﾍﾞｰｽ
7	7116-1909XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB
8	48A47016	002	WIRE HOLDER 電線押さえ
9	48A47017	003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ
10	48A47020	A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ
12	48A19049	002 ①	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ
13	48A47025	003 ①	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A19007	011 ②	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ
15	48A19019	032	BUSH ﾌﾞｯｼｭ
16	48A47014	001	FEEDING CAM 送りｶﾑ

No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
17	48A47013		FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
23	48A19023	001	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
	7116-1909XKP		BRACKET ﾌﾞﾗｹｯﾄ
27	-		~~STABILIZER CRIMPER~~ ~~ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
	〈オプション OPTION〉		
13	48A47025 ③	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A47042	-002 ②	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
③	2010/6/21	ｷｬﾘｱｶｯﾀｰ用ｱｳﾀｰｼｬｰ追加	QX7	Y.NOZAWA
②	2007/11/5	010→011, 003→002	QX7	T.Suzuki
①	2007/6/13	001→002, 002→003	QX7	T.Suzuki

APPRICATION POST 申請部署	
PTC	
DESIGNED DATE 設計日	
2007/3/30	
APPROVED 承認	DESIGNED 設計
K,Hiraguchi	T,Suzuki
2007/3/30	2007/3/30

ISSUE
2016/02/16
YAZAKI PARTS CO.LTD HAIBARA OFFICE

ISSUED 発行