APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1710E162

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164157 SEQUENCE Nº 1

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-4157-02	*	**04 SIDE FEED**	**YSD-XVK81**	*







Anvil		
7116-4157XA		(A)
CW (c) 2,02	*CW (i)* 2,50	




Wire Crimper		
7116-4157XW		(N)
CW 2,00		

Insulation Crimper		
7116-4157XI		(A)
CW 2,50		

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

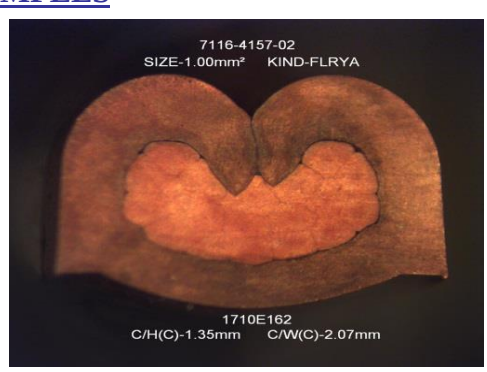
	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up is within the criteria**(*)**	O
	Bend down is within the criteria**(*)**	O
	The terminal is not bent sideway, looking from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

(*) - Specified on Crimping Std.

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,2	1,21	2,33
	+/-0.05		



	NOMINAL	AVERAGE	Cmk
mm	1,35	1,35	2,72
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm².
Size 0.50mm² C/W(I)-2.53mm
Size 1.00mm² C/W(I)-2.58mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
		
Date: 2017-nov-21	Date: 2017-nov-20	Date: 2017-nov-20

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1710E162

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 0,5 mm^2

Nominal Cr. Height:	1,2	2,15	mm
+/-	0,05	0,1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,206	2,158
2	1,207	2,157
3	1,201	2,162
4	1,211	2,151
5	1,200	2,147
6	1,210	2,157
7	1,205	2,160
8	1,192	2,148
9	1,205	2,145
10	1,210	2,157
11	1,206	2,161
12	1,207	2,154
13	1,213	2,145
14	1,202	2,160
15	1,206	2,165
16	1,212	2,164
17	1,202	2,153
18	1,199	2,166
19	1,211	2,169
20	1,214	2,156
21	1,205	2,151
22	1,198	2,146
23	1,210	2,151
24	1,215	2,161
25	1,211	2,166
26	1,201	2,143
27	1,201	2,140
28	1,212	2,150
29	1,217	2,157
30	1,206	2,162
31	1,202	2,143
32	1,217	2,139
33	1,219	2,155
34	1,204	2,159
35	1,201	2,153
36	1,208	2,137
37	1,216	2,150
38	1,213	2,158
39	1,203	2,157
40	1,203	2,145
41	1,213	2,139
42	1,216	2,147
43	1,200	2,161
44	1,208	2,147
45	1,212	2,147
46	1,215	2,155
47	1,203	2,160
48	1,198	2,148
49	1,206	2,163
50	1,214	2,164
Average	1,21	2,15
Cmk	2,33	3,96

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Total wire size: 1 mm^2

Nominal Cr. Height:	1,35	2,75	mm
+/-	0,05	0,1	mm

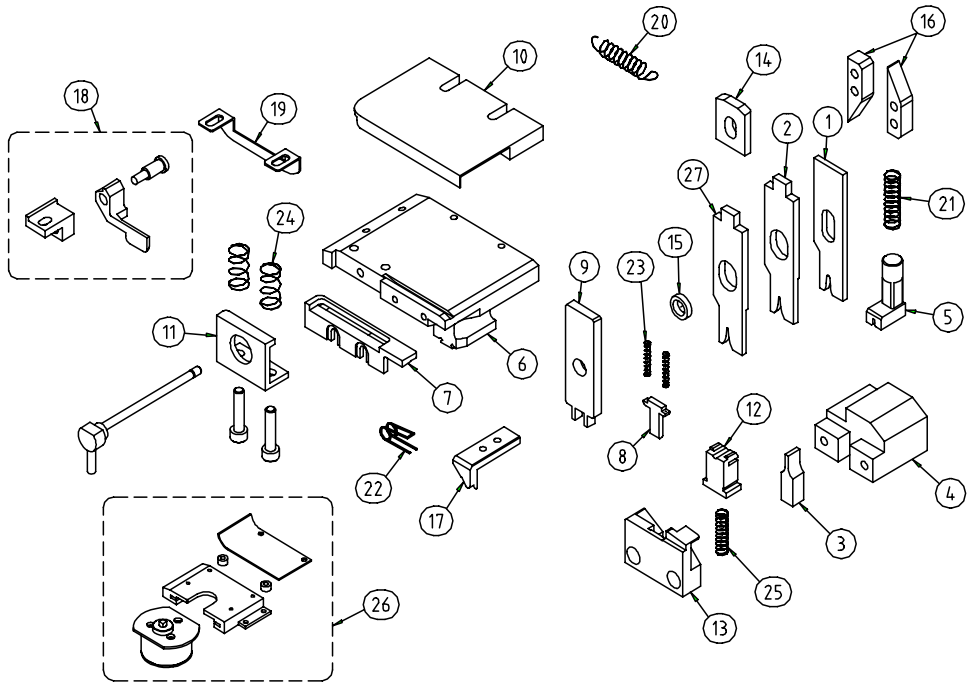
Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1,356	2,761
2	1,363	2,753
3	1,353	2,760
4	1,348	2,758
5	1,358	2,760
6	1,350	2,760
7	1,359	2,759
8	1,353	2,756
9	1,347	2,763
10	1,343	2,766
11	1,352	2,759
12	1,361	2,754
13	1,363	2,761
14	1,347	2,766
15	1,345	2,768
16	1,357	2,756
17	1,360	2,760
18	1,349	2,765
19	1,352	2,758
20	1,359	2,752
21	1,353	2,752
22	1,348	2,761
23	1,357	2,765
24	1,358	2,754
25	1,349	2,751
26	1,356	2,755
27	1,357	2,761
28	1,350	2,758
29	1,357	2,750
30	1,353	2,750
31	1,346	2,760
32	1,357	2,749
33	1,362	2,753
34	1,350	2,757
35	1,348	2,760
36	1,358	2,752
37	1,363	2,750
38	1,357	2,759
39	1,349	2,759
40	1,349	2,751
41	1,360	2,749
42	1,364	2,757
43	1,356	2,759
44	1,352	2,752
45	1,361	2,748
46	1,363	2,758
47	1,355	2,748
48	1,350	2,748
49	1,357	2,754
50	1,361	2,760
Average	1,35	2,76
Cmk	2,72	5,93

Acceptance criteria: Cmk>= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1500	TERMINAL No. 端子品番	7116-4157
Common PN 共通品番	-	-	-
	-	-	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-4157XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-4157XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-4157XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7116-4157XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-4157XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-4157XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-4157XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-4157XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	002①	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			
13	48A47025	002①	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	<OPTION ｵﾌﾟｼｮﾝ>			
14	48A19007	024	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	020	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	
					HIB	
					DESIGNED DATE 設計日	
					2007/6/20	
	2013/06/14	PTC			APPROVED 承認	DESIGNED 設計
①	2007/7/9	001→002,021→025	QX7	T.Suzuki	K.Hiraguchi	T.Suzuki
					2007/6/20	2007/6/20

ISSUED '10.05.31 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.

ISSUED 発行