PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1104E064

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72165238 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7216-5238-02	*	MXSR	4514400057	DAIMLER TRUCK - NCP







Applicable Terminals for this Tool:

7216-5238-02							

Anvil			Wire Crimper			Insulation Crimper		
7216-5238XA		(N)	7216-5238XW		(A1)	7216-5238XI		(N)
CW (c)	1.32	*CW (i)* 1.93	*CW*	1.30		*CW*	1.93	

1 - VISUAL / MEASURED CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.05 mm 0 - 0.15 mm	0.1		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.03		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.25 mm 0 - 0.25 mm	0.06		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 0.7 mm	0.32		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	0.61		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 0.15 mm			The body of the terminal is not twisted.	O

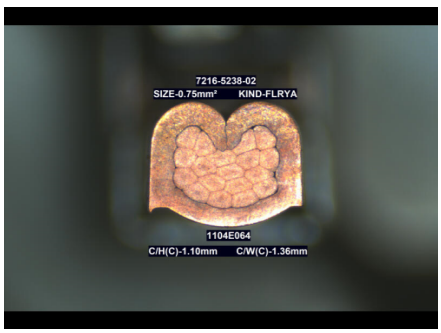
(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.1	1.11	4.93
	+/- **0.05**		

	NOMINAL	AVERAGE	Cmk
mm			
	+/-		

REMARKS:

Aplicable wire range 0.75mm²~0.75mm².

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº2988
Date: 26/06/2026	Date: 24/06/2026	Date: 24/06/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

1104E064

LOWER WIRE KIND & SIZE

C/W(I): 2.01 mm

Wire kind: FLRYA

Wire size: 0.75 mm²

Nominal Cr. Height:	1.1	2.05	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.108	2.050
2	1.104	2.056
3	1.111	2.049
4	1.106	2.060
5	1.110	2.056
6	1.110	2.058
7	1.105	2.053
8	1.103	2.059
9	1.110	2.054
10	1.110	2.052
11	1.104	2.055
12	1.108	2.053
13	1.111	2.058
14	1.104	2.056
15	1.103	2.058
16	1.109	2.056
17	1.103	2.053
18	1.103	2.056
19	1.109	2.051
20	1.107	2.054
21	1.103	2.051
22	1.104	2.054
23	1.107	2.052
24	1.110	2.055
25	1.103	2.052
26	1.105	2.057
27	1.110	2.057
28	1.106	2.052
29	1.103	2.051
30	1.105	2.055
31	1.108	2.058
32	1.104	2.052
33	1.110	2.054
34	1.105	2.051
35	1.103	2.057
36	1.107	2.052
37	1.104	2.057
38	1.109	2.052
39	1.108	2.055
40	1.105	2.053
41	1.109	2.056
42	1.106	2.052
43	1.102	2.056
44	1.107	2.053
45	1.102	2.056
46	1.104	2.053
47	1.104	2.057
48	1.105	2.052
49	1.099	2.057
50	1.100	2.053
Average	1.11	2.05
Cmk	4.93	12.45

UPPER WIRE KIND & SIZE

C/W(I): mm

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		


Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-4373	TERMINAL No. 端子品番	7216-5238

共通品番	–	–	–	–
	–	–		

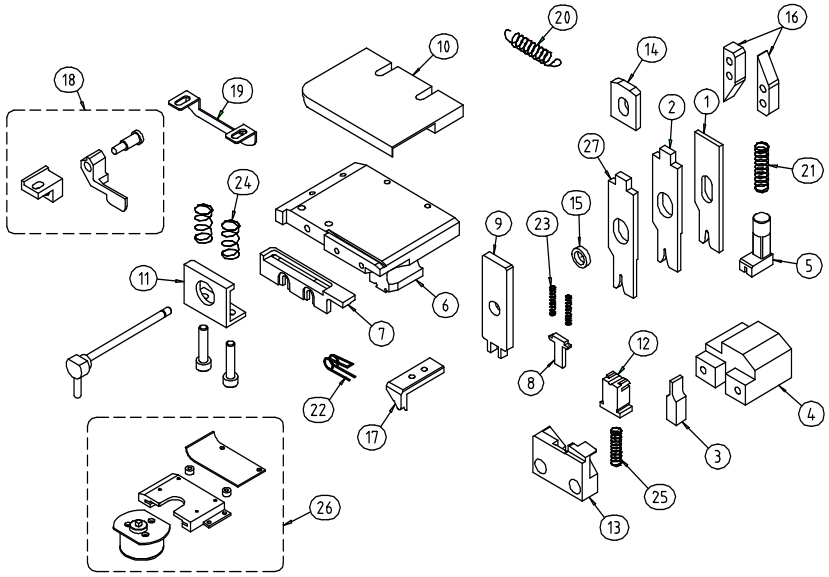

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7216-5238XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ
2	7216-5238XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ
3	7216-5238XA		ANVIL ｱﾝﾋﾞﾙ
4	7216-5238XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ
5	7216-5238XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ
6	7216-5238XYB		BASE ﾍﾞｰｽ
7	7216-5238XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB
8	48A47016	-001	WIRE HOLDER 電線押さえ
9	48A47017	-004 ①	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ
10	48A47020	A04 ③	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA
11	48A47022	-001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ
12	48A47024	-001	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ
13	48A47025	-001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A19007	-023	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ
15	48A19019	012 ②	BUSH ﾌﾞｯｼｭ
16	48A47014	-003	FEEDING CAM 送りｶﾑ

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
17	48A47013	-001	FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
19	48A19047	-002	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
23	48A19023	-002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
	7216-5238XKP		BRACKET ﾌﾞﾗｹｯﾄ
27	~~7216-5238XQ~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
〈OPTION オプション〉			
13	48A47025	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
③	12-03-2012	A03→A04	12C-026	Y.YAGI
②	07-10-2011	016→012	11J-018	Y.YAGI
①	20-03-2009	002→004	09C-017	K.Muramatsu

APPRICATION POST 申請部署		
YOT-K		
DESIGNED DATE 設計日		
31-10-2007		
APPROVED 承認	DESIGNED 設計	
T.Maki	C.Almeida	
19-06-2008	31-10-2007	ISSUED 発行