PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1104E102

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71151425 * SEQUENCE Nº 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7115-1425-02	*	MXSR	4514204126	DAIMLER TRUCK - BEV

Applicable Terminals for this Tool:

7115-1425-02	7115-1425-04			

Anvil			Wire Crimper		Insulation Crimper	
7115-1425XA		(N)	7115-1425XW	(1)	7115-1425XI	(1)
CW (c)	1.80	CW (i) 2.06	CW	1.78	CW	2.06

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.5 mm 0.3 - 0.8 mm	0.07 0.4		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.5 mm	0.26		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 5 ° 0 - 5 °	0.4		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0 - 1 mm	0.39		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 5 mm	1.3		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 5 mm	0.1		The body of the terminal is not twisted.	O


O - ok **X** - ng **NA** - not aplicable

(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

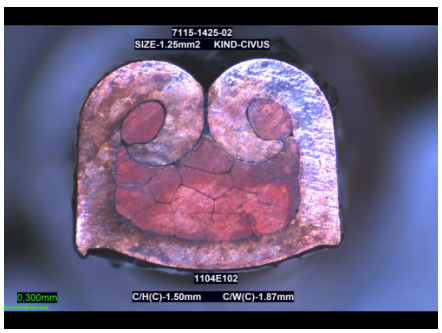2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk		NOMINAL	AVERAGE	Cmk
mm	1.5	1.50	6.12	mm			
	+/- **0.05**				+/-		

REMARKS:

Applicable wire range-0.50~1.25mm2
The wire size 0.50/0.75/1.00mm2 is not recommended due to crimping microcut conditions.

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) nº3485	CHECKED (Operator) nº44	PREPARED (Operator) nº2624
Date: 22/05/2025	Date: 22/05/2025	Date: 22/05/2025

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°
1104E102

LOWER WIRE KIND & SIZE

C/W(I): 2.16 mm

Wire kind: CIVUS

Wire size: 1.25 mm²

Nominal Cr. Height:	1.5	2.2	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.502	2.201
2	1.501	2.202
3	1.501	2.198
4	1.501	2.206
5	1.507	2.212
6	1.502	2.204
7	1.508	2.205
8	1.505	2.200
9	1.504	2.207
10	1.501	2.185
11	1.501	2.207
12	1.500	2.194
13	1.502	2.202
14	1.506	2.202
15	1.502	2.201
16	1.501	2.202
17	1.496	2.200
18	1.500	2.202
19	1.504	2.206
20	1.506	2.205
21	1.502	2.197
22	1.500	2.198
23	1.502	2.195
24	1.501	2.202
25	1.495	2.201
26	1.506	2.200
27	1.503	2.201
28	1.502	2.197
29	1.502	2.200
30	1.500	2.193
31	1.506	2.211
32	1.502	2.193
33	1.501	2.201
34	1.502	2.198
35	1.501	2.208
36	1.503	2.191
37	1.498	2.203
38	1.505	2.202
39	1.500	2.194
40	1.497	2.195
41	1.501	2.204
42	1.503	2.202
43	1.506	2.209
44	1.500	2.197
45	1.500	2.200
46	1.503	2.199
47	1.504	2.203
48	1.501	2.195
49	1.501	2.199
50	1.501	2.196
Average	1.50	2.20
Cmk	6.12	6.47

UPPER WIRE KIND & SIZE

C/W(I): mm

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		


Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-4376	TERMINAL No. 端子品番	7115-1425

Common PN 共通品番	–	–	–	–
	–	–		

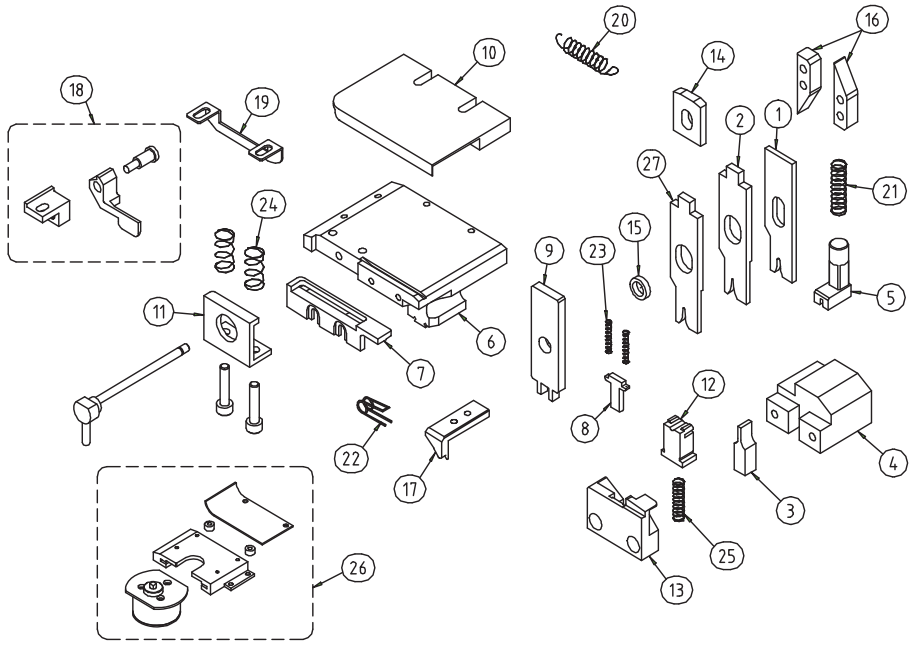

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7115-1425XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	001	FEEDING CLAW 送り爪
2	7115-1425XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7115-1425XA		ANVIL アンビル	19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
4	7115-1425XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7115-1425XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7115-1425XYB		BASE ベース	22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
7	7115-1425XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
10	48A47020	A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ		7115-1425XKP		BRACKET ブラケット
12	48A47024	001	SHEARBLADE シャーブレード	27			~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	001	OUTER SHEARBLADE アウターシャーブレード	〈OPTION オプション〉			
14	48A19007	026①	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	101	OUTER SHEARBLADE アウターシャーブレード
15	48A19019	021	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	001	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	DESIGNED 設計	ISSUED 発行
					接続技術部		
					DESIGNED DATE 設計日		
					2007/11/9		
					APPROVED 承認	DESIGNED 設計	
①	2009/7/14	023→026	09G-047	C,Abe	T,Maki	T,Suzuki	
					2007/11/9	2007/11/9	

ISSUE 2014/10/20 YAZAKI PARTS CO.,LTD HAIBARA OFFICE