PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1204E190

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71169618 T SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-9618-02	*	MXC1R	4514400057	DAIMLER TRUCK - BEV D4

Applicable Terminals for this Tool:

7116-9618-02					

Anvil			Wire Crimper			Insulation Crimper		
7116-9618XA		(N)	7116-9618XW		(1)	7116-9618TXI		(N)
CW (c)	2.82	CW (i) 3.60	CW	2.80		CW	3.60	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.3 mm 0.2 - 0.6 mm	0.18 0.43		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.5 mm	0.35		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 2 ° 0 - 2 °	1.95		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.5 - 1 mm	0.97		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	0.11		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 3 °	0.24		The body of the terminal is not twisted.	O


O - ok **X** - ng **NA** - not aplicable

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE | **UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



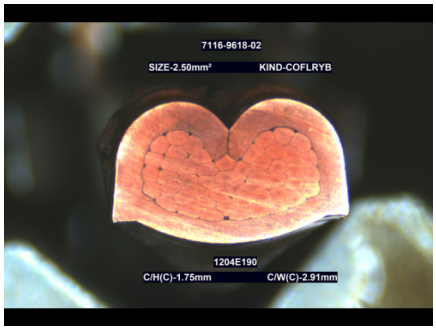

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk		NOMINAL	AVERAGE	Cmk
mm	1.55	1.56	4.49	mm	1.75	1.75	4.83
	+/- 0.05				+/- 0.05		

REMARKS:

The applicable wire size range 1.50mm²~2.50mm²

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº33288	CHECKED (Operator) nº44	PREPARED (Operator) nº19477
Barbosa	Ribeiro	Renato Tavares
Date: 26/06/2026	Date: 24/06/2026	Date: 23/06/2026

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°
1204E190

LOWER WIRE KIND & SIZE

C/W(I): 3.60 mm
Wire kind: COFLRYB
Wire size: 1.50 mm²
Nominal Cr. Height: 1.55 2.8 mm
+/- 0.05 0.1 mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.554	2.857
2	1.554	2.855
3	1.558	2.851
4	1.554	2.852
5	1.551	2.855
6	1.554	2.856
7	1.555	2.858
8	1.562	2.855
9	1.558	2.853
10	1.555	2.852
11	1.552	2.856
12	1.550	2.859
13	1.553	2.856
14	1.554	2.854
15	1.557	2.851
16	1.559	2.856
17	1.558	2.860
18	1.555	2.857
19	1.549	2.853
20	1.554	2.850
21	1.557	2.854
22	1.561	2.857
23	1.558	2.855
24	1.556	2.854
25	1.555	2.860
26	1.551	2.858
27	1.549	2.856
28	1.551	2.851
29	1.553	2.855
30	1.555	2.859
31	1.558	2.857
32	1.560	2.855
33	1.555	2.853
34	1.549	2.850
35	1.551	2.853
36	1.553	2.856
37	1.556	2.859
38	1.557	2.861
39	1.553	2.859
40	1.552	2.861
41	1.556	2.857
42	1.563	2.856
43	1.560	2.853
44	1.555	2.850
45	1.552	2.854
46	1.554	2.857
47	1.556	2.855
48	1.560	2.853
49	1.558	2.849
50	1.555	2.853
Average	1.56	2.86
Cmk	4.49	5.02

UPPER WIRE KIND & SIZE

C/W(I): 3.64 mm
Wire kind: COFLRYB
Wire size: 2.50 mm²
Nominal Cr. Height: 1.75 3.05 mm
+/- 0.05 0.1 mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.758	3.053
2	1.756	3.053
3	1.754	3.051
4	1.752	3.051
5	1.750	3.054
6	1.753	3.057
7	1.754	3.051
8	1.754	3.052
9	1.760	3.055
10	1.756	3.055
11	1.753	3.049
12	1.752	3.054
13	1.755	3.056
14	1.757	3.052
15	1.759	3.048
16	1.756	3.052
17	1.752	3.057
18	1.750	3.055
19	1.749	3.045
20	1.752	3.058
21	1.753	3.054
22	1.755	3.051
23	1.757	3.049
24	1.761	3.053
25	1.757	3.054
26	1.753	3.061
27	1.750	3.055
28	1.752	3.050
29	1.754	3.052
30	1.758	3.056
31	1.761	3.054
32	1.757	3.051
33	1.754	3.053
34	1.753	3.055
35	1.750	3.058
36	1.752	3.053
37	1.754	3.049
38	1.761	3.050
39	1.758	3.052
40	1.756	3.051
41	1.752	3.058
42	1.750	3.055
43	1.753	3.052
44	1.754	3.051
45	1.751	3.051
46	1.751	3.056
47	1.754	3.065
48	1.756	3.058
49	1.759	3.054
50	1.757	3.056
Average	1.75	3.05
Cmk	4.83	9.39

Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-1680	TERMINAL No. 端子品番	7116-9618
Common PN 共通品番	–	–	–
	–	–	

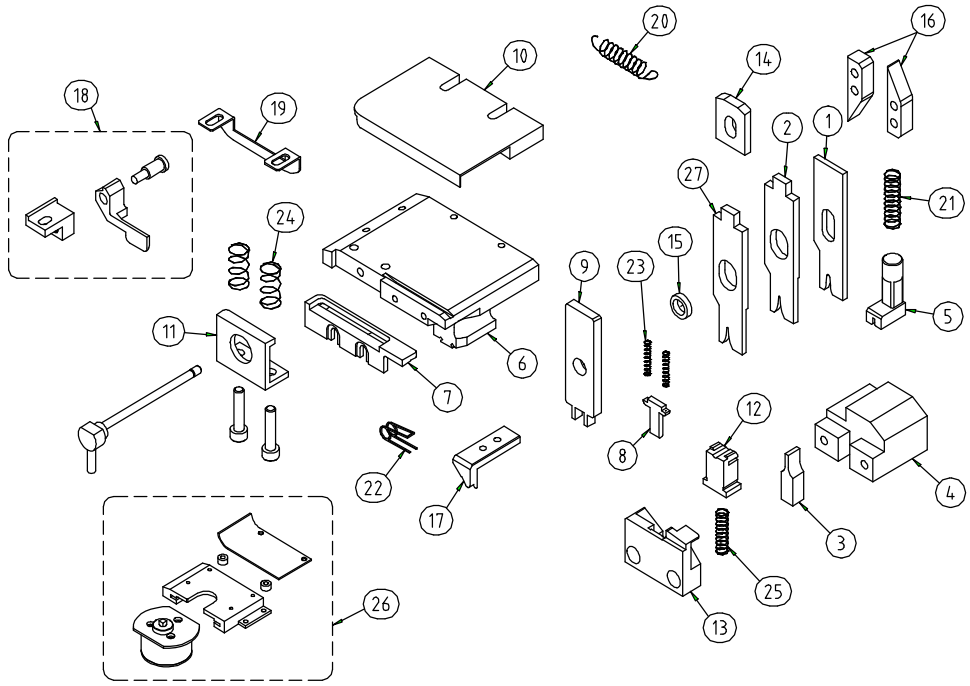

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-9618XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-9618TXI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7116-9618XA		ANVIL アンビル	19	48A19047	002	TERMINAL SCRAPER 端子掻き落とし
4	7116-9618XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7116-9618XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7116-9618XYB		BASE ベース	22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
7	7116-9618XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
10	48A47020	A06	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ		7116-9618XKP		BRACKET ブラケット
12	48A47024	001	SHEARBLADE シャーブレード	27			~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	001	OUTER SHEARBLADE アウターシャーブレード	〈OPTION オプション〉			
14	48A19007	027 ①	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	101	OUTER SHEARBLADE アウターシャーブレード
15	48A19019	013	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	001	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計
①	2007/12/13	022→027	QX7	T,Suzuki	T,Maki	T,Suzuki
ISSUED 発行					2007/8/29	2007/8/29

APPRICATION POST 申請部署: HIB

DESIGNED DATE 設計日: 2007/8/29

ISSUED '12.04.20 YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.