PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1907E079

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7316-8096 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7316-8096-02	*	**MYCR**	**YSD-4514078965**	**AIMLER TRUCK B**

Applicable Terminals for this Tool:

7316-8096-02							

Anvil			Wire Crimper			Insulation Crimper		
7316-8096XA		(1)	7316-8096XW		(1)	7316-8096XIC		(1)
CW (c)	1,92	*CW (i)* 2,70	*CW*	1,90		*CW*	2,70	

1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0~0.20mm 0.20~0.60mm	0 0.41		The Bell Mouth is within the spec.(*)	O
	Not found any Bell Mouth in the insulation area.	O	0~0.30mm	0.20		The dimension of the cutting carrier is within the spec.(*)	O
	The lance height and shape are not deformed.	O	0~0.30mm 0~0.30mm	0.09 -		Bend up and Bend down are within the criteria(*)	O
	Not found any burr in the cutting carrier.	O	0.10~0.50mm	0.30		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	5º	0.8		The terminal is not bent sideway, look-king from the top(*)	O
	The wire barrel is free from major burrs.	O	0~0.30mm	0.05		The body of the terminal is not twisted(*)	O


O - ok X - ng NA - not aplicable

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

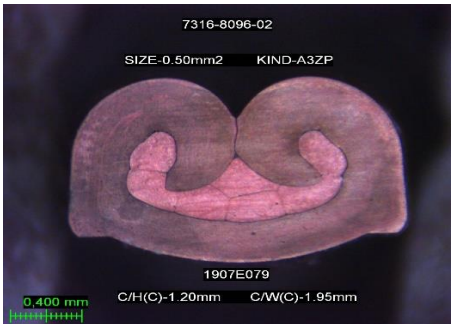

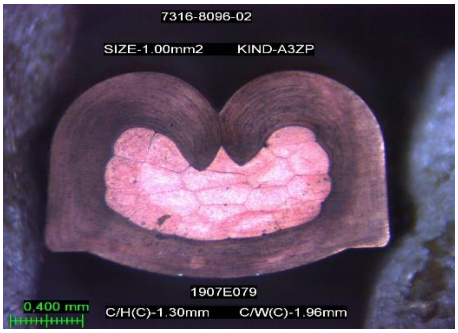

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,2	1,20	6,24
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1,3	1,30	5,19
	+/-0.05		

REMARKS:

Aplicable wire range-0.50~1.00mm^2
Size 0.50mm^2 C/W(I)-2.68mm
Size 1.00mm^2 C/W(I)-2.73mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
Date: 2024/jul/08	Date: 2024/jun/28	Date: 2024/jun/27

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1907E079

LOWER WIRE KIND & SIZE

Wire kind: A3ZP

Wire size: 0,5 mm^2

Nominal Cr. Height:	1,2	2,2	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,200	2,202
2	1,204	2,194
3	1,200	2,199
4	1,197	2,200
5	1,194	2,204
6	1,195	2,203
7	1,197	2,201
8	1,202	2,197
9	1,201	2,199
10	1,198	2,202
11	1,196	2,205
12	1,197	2,208
13	1,200	2,205
14	1,203	2,198
15	1,202	2,205
16	1,199	2,206
17	1,196	2,204
18	1,197	2,200
19	1,198	2,199
20	1,199	2,201
21	1,202	2,203
22	1,201	2,206
23	1,199	2,198
24	1,196	2,198
25	1,201	2,200
26	1,202	2,203
27	1,201	2,205
28	1,199	2,205
29	1,195	2,203
30	1,199	2,199
31	1,203	2,200
32	1,204	2,202
33	1,204	2,207
34	1,201	2,207
35	1,198	2,205
36	1,198	2,205
37	1,200	2,206
38	1,203	2,206
39	1,202	2,204
40	1,200	2,202
41	1,197	2,204
42	1,198	2,207
43	1,201	2,205
44	1,202	2,202
45	1,204	2,195
46	1,203	2,190
47	1,200	2,191
48	1,197	2,190
49	1,198	2,202
50	1,198	2,205
Average	1,20	2,20
Cmk	6,24	7,55

UPPER WIRE KIND & SIZE

Wire kind: A3ZP

Wire size: 1 mm^2

Nominal Cr. Height:	1,3	2,3	mm
+/-	0,05	0,1	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,299	2,309
2	1,303	2,310
3	1,300	2,312
4	1,302	2,308
5	1,306	2,306
6	1,303	2,309
7	1,300	2,311
8	1,301	2,310
9	1,304	2,308
10	1,305	2,310
11	1,304	2,312
12	1,301	2,308
13	1,297	2,309
14	1,298	2,313
15	1,301	2,314
16	1,305	2,315
17	1,302	2,313
18	1,301	2,309
19	1,299	2,306
20	1,301	2,305
21	1,302	2,309
22	1,306	2,311
23	1,305	2,314
24	1,303	2,313
25	1,299	2,310
26	1,301	2,306
27	1,304	2,307
28	1,307	2,309
29	1,307	2,312
30	1,306	2,311
31	1,304	2,309
32	1,301	2,304
33	1,302	2,305
34	1,305	2,308
35	1,306	2,310
36	1,308	2,308
37	1,307	2,305
38	1,305	2,303
39	1,307	2,301
40	1,307	2,302
41	1,305	2,305
42	1,303	2,309
43	1,306	2,308
44	1,308	2,306
45	1,310	2,302
46	1,308	2,306
47	1,305	2,309
48	1,301	2,308
49	1,304	2,304
50	1,306	2,301
Average	1,30	2,31
Cmk	5,19	8,88

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1855	TERMINAL No. 端子品番	7316-8096C

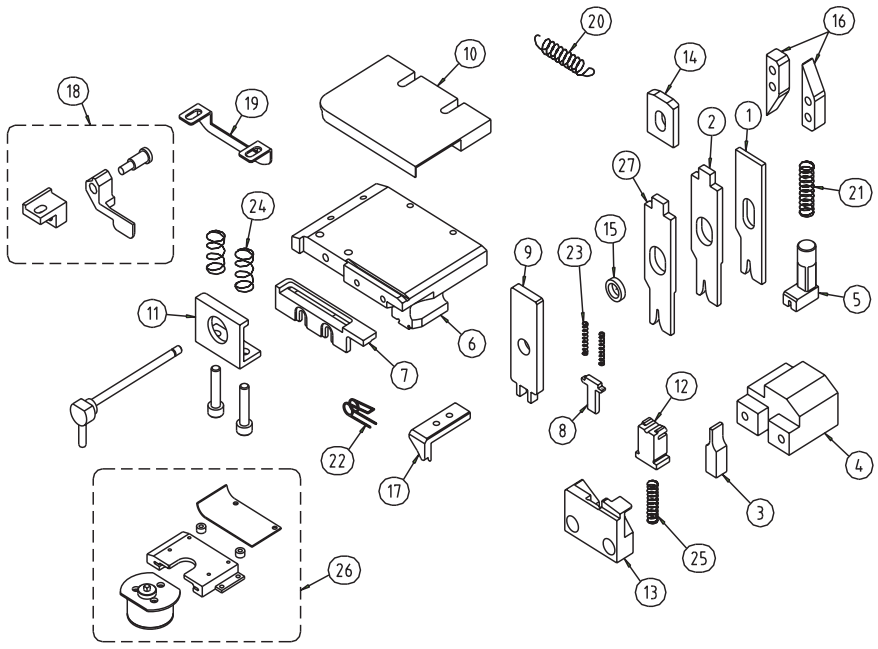

No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
1	7316-8096XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ
2	7316-8096XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ
3	7316-8096XA		ANVIL ｱﾝﾋﾞﾙ
4	7316-8096XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ
5	7316-8096XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ
6	7316-8096XYB		BASE ﾍﾞｰｽ
7	7316-8096XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB
8	48A47016	001	WIRE HOLDER 電線押さえ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ
10	48A47020	A05 ②④	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ
12	48A47024	002 ②	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ
13	48A47025	003 ②	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
14	48A19007	025③	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ
15	48A19019	013	BUSH ﾌﾞｯｼｭ

No.	PARTS No. 部品番号	DRW. No. 図番	PARTS NAME 部品名称
16	48A47014	001	FEEDING CAM 送りｶﾑ
17	48A47013		FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
19	48A19047	001	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
23	48A19023	001	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
	7316-8096XKP		BRACKET ﾌﾞﾗｹｯﾄ
27	-		~~STABILIZER CRIMPER~~ ~~ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
〈オプション OPTION〉			
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
④	2011/7/5	A04→A05	11F-052	Y.YAGI
③	2009/6/3	023→025	QX7	C.Abe
②	2007/5/17	CHANGED PART No.	QX7	T.Suzuki
①	2007/3/20	CHANGED PART No.	07C-031	鈴木

APPRICATION POST 申請部署	
PTC	
DESIGNED DATE 設計日	
2007/3/1	
APPROVED 承認	DESIGNED 設計
K.Hiraguchi	T.Suzuki
2007/3/1	2007/3/1

ISSUED 発行

ISSUE
2021/06/24
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.