PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
1907E087

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7216-7793 * SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7216-7793-02	*	**MYSR**	**YSD-4514078965**	**AIMLER TRUCK B**

Applicable Terminals for this Tool:

7216-7793-02	**7216-7793-06**			

Anvil			Wire Crimper			Insulation Crimper		
7216-7793XA		(N)	7216-7793XW		(1)	7216-7793XI		(1)
CW (c)	1,42	*CW (i)* 1,83	*CW*	1,40		*CW*	1,83	


1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)			
			O - ok **X** - ng **NA** - not aplicable				
	The two sides of the insulation grips are in the correct position.	**O**	0~0.35mm 0.15~0.35mm	0.15 0.34		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**O**	0~0.30mm	0.18		The dimension of the cutting carrier is within the spec.**(*)**	**O**
	The lance height and shape are not deformed.	**O**	0~0.20mm 0~0.20mm	0.12 -		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**O**	0.10~0.40mm	0.35		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	5º	1.1		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	0~0.30mm	0		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

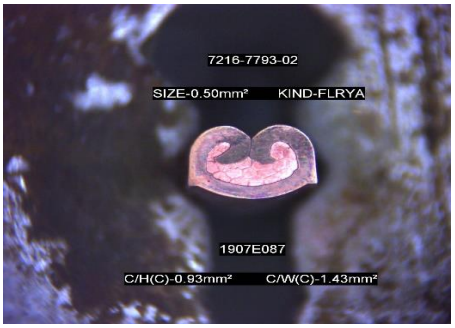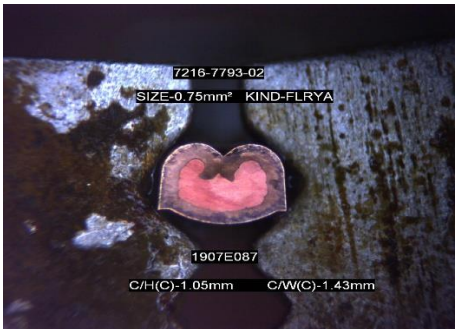2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0,93	0,93	2,36
	+/-0.03		

	NOMINAL	AVERAGE	Cmk
mm	1,05	1,05	3,11
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~0.75mm².
Size 0.50mm² C/W(I)-1.88mm
Size 0.75mm² C/W(I)-1.92mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
Date: 2024/jul/08	Date: 2024/jun/25	Date: 2024/jun/21

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1907E087

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,5 mm^2

Nominal Cr. Height:	0,93	1,85	mm
+/-	0,03	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0,942	1,856
2	0,941	1,859
3	0,934	1,856
4	0,932	1,862
5	0,938	1,858
6	0,936	1,857
7	0,929	1,864
8	0,933	1,867
9	0,936	1,854
10	0,931	1,863
11	0,929	1,865
12	0,934	1,855
13	0,930	1,852
14	0,934	1,853
15	0,930	1,861
16	0,928	1,852
17	0,934	1,851
18	0,928	1,860
19	0,927	1,848
20	0,932	1,848
21	0,933	1,856
22	0,928	1,857
23	0,933	1,860
24	0,929	1,852
25	0,927	1,850
26	0,935	1,858
27	0,938	1,862
28	0,932	1,860
29	0,933	1,851
30	0,934	1,860
31	0,937	1,864
32	0,935	1,853
33	0,936	1,863
34	0,939	1,865
35	0,934	1,869
36	0,933	1,858
37	0,936	1,866
38	0,939	1,868
39	0,934	1,860
40	0,938	1,858
41	0,940	1,865
42	0,940	1,860
43	0,934	1,857
44	0,932	1,864
45	0,936	1,863
46	0,933	1,855
47	0,933	1,853
48	0,937	1,862
49	0,933	1,862
50	0,934	1,866
Average	0,93	1,86
Cmk	2,36	5,64

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,75 mm^2

Nominal Cr. Height:	1,05	2,05	mm
+/-	0,05	0,1	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,058	2,058
2	1,055	2,059
3	1,052	2,051
4	1,056	2,056
5	1,050	2,050
6	1,048	2,051
7	1,054	2,056
8	1,057	2,051
9	1,047	2,044
10	1,054	2,049
11	1,051	2,052
12	1,047	2,050
13	1,043	2,053
14	1,049	2,058
15	1,054	2,052
16	1,057	2,047
17	1,048	2,056
18	1,047	2,056
19	1,055	2,047
20	1,058	2,055
21	1,048	2,047
22	1,057	2,052
23	1,049	2,057
24	1,045	2,046
25	1,051	2,045
26	1,049	2,054
27	1,046	2,045
28	1,045	2,046
29	1,054	2,052
30	1,060	2,055
31	1,048	2,057
32	1,052	2,046
33	1,058	2,054
34	1,050	2,058
35	1,049	2,058
36	1,057	2,047
37	1,058	2,050
38	1,053	2,055
39	1,060	2,057
40	1,061	2,046
41	1,057	2,053
42	1,055	2,056
43	1,062	2,058
44	1,064	2,046
45	1,054	2,053
46	1,053	2,057
47	1,061	2,061
48	1,057	2,055
49	1,052	2,050
50	1,050	2,049
Average	1,05	2,05
Cmk	3,11	7,17

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-5633	TERMINAL No. 端子品番	7216-7793
共通品番	– – – – – – – –		

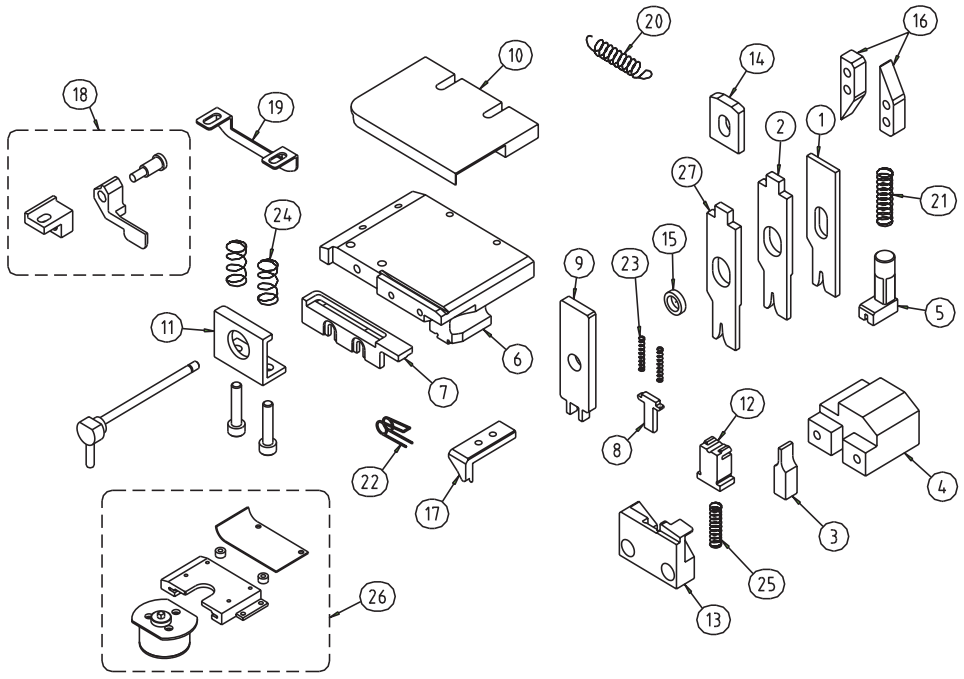

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7216-7793XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	-001	FEEDING CLAW 送り爪
2	7216-7793XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-005	WIRE STOPPER Assy 電線ストッパーアッシー
3	7216-7793XA		ANVIL アンビル	19	48A19047	002 ①	TERMINAL SCRAPER 端子掻き落とし
4	7216-7793XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7216-7793XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7216-7793XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7216-7793XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
10	48A47020	-A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ		7216-7793XKP		BRACKET ブラケット
12	48A47024	-001	SHEARBLADE シャーブレード	27	~~7216-7793XQ~~		~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	-002	OUTER SHEARBLADE アウターシャーブレード	〈OPTION オプション〉			
14	48A19007	-025	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャーブレード
15	48A19019	-019	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-003	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	DESIGNED 設計	ISSUED 発行
					YUL		
					DESIGNED DATE 設計日		
					2/18/2013		
					APPROVED 承認	DESIGNED 設計	
①	2014/11/5	003→002	14K-021	Y.YAGI	T,Maki	C.Almeida	
					2/18/2013	2/18/2013	

ISSUE
5/29/2018
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.