PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)






Applicator Serial Nº
1912E030

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71164362 SEQUENCE Nº 9


Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7116-4362-02	*	**MYC**	**YSD 3500159659**	*

Anvil			Wire Crimper			Insulation Crimper		
7116-4362TXA		(N)	7116-4362XW		(N)	7116-4362TXI		(N)
CW (c)	1.32	*CW (i)* 1.80	*CW*	1.30		*CW*	1.80	

1 - VISUAL CHECK ITEMS

	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

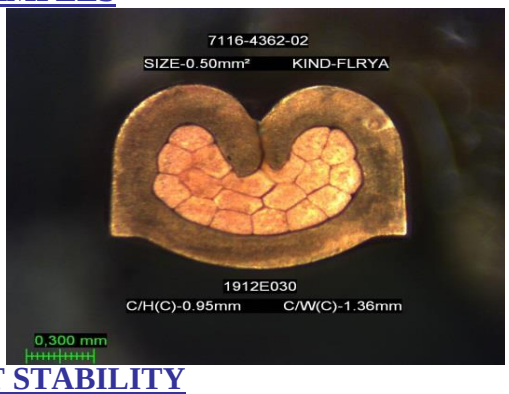
O - ok **X** - ng **NA** - not aplicable

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.85	0.85	5.47
	+/-0.03		

	NOMINAL	AVERAGE	Cmk
mm	0.95	0.95	4.27
	+/-0.03		

REMARKS:

Aplicable wire range 0.35mm²~0.50mm²
Wire 0.35mm² C/W(I)-1.80mm
Wire 0.50mm² C/W(I)-1.83mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2020/Feb/13	Date: 2020/Feb/12	Date: 2020/Feb/11

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
1912E030

LOWER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 0.35 mm²

Nominal Cr. Height:	0.85	1.5	mm
+/-	0.03	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.849	1.500
2	0.848	1.503
3	0.853	1.501
4	0.851	1.505
5	0.850	1.505
6	0.849	1.503
7	0.850	1.502
8	0.852	1.505
9	0.851	1.503
10	0.853	1.503
11	0.854	1.505
12	0.852	1.507
13	0.851	1.506
14	0.851	1.506
15	0.849	1.500
16	0.850	1.509
17	0.849	1.506
18	0.851	1.498
19	0.849	1.504
20	0.851	1.500
21	0.849	1.506
22	0.849	1.504
23	0.848	1.496
24	0.848	1.502
25	0.848	1.495
26	0.847	1.506
27	0.849	1.495
28	0.849	1.501
29	0.852	1.504
30	0.852	1.494
31	0.852	1.501
32	0.851	1.503
33	0.853	1.503
34	0.849	1.504
35	0.848	1.497
36	0.846	1.500
37	0.848	1.502
38	0.851	1.499
39	0.850	1.501
40	0.847	1.499
41	0.849	1.496
42	0.849	1.494
43	0.849	1.499
44	0.850	1.498
45	0.849	1.496
46	0.848	1.495
47	0.848	1.498
48	0.847	1.499
49	0.848	1.499
50	0.849	1.499
Average	0.85	1.50
Cmk	5.47	8.70

UPPER WIRE KIND & SIZE

Wire kind: FLRYB

Wire size: 0.5 mm²

Nominal Cr. Height:	0.95	1.7	mm
+/-	0.03	0.1	mm

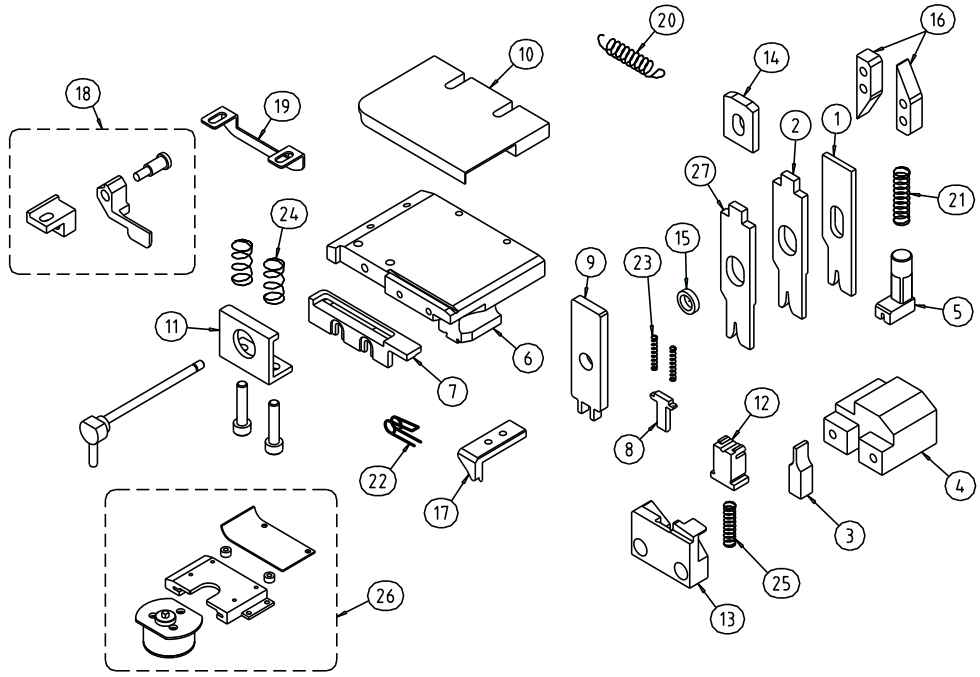
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.955	1.706
2	0.953	1.706
3	0.950	1.705
4	0.949	1.705
5	0.952	1.704
6	0.951	1.703
7	0.953	1.704
8	0.952	1.704
9	0.953	1.703
10	0.952	1.702
11	0.951	1.703
12	0.953	1.705
13	0.951	1.704
14	0.952	1.702
15	0.952	1.703
16	0.953	1.706
17	0.950	1.705
18	0.952	1.703
19	0.956	1.703
20	0.956	1.703
21	0.951	1.702
22	0.950	1.706
23	0.951	1.707
24	0.947	1.702
25	0.951	1.699
26	0.949	1.699
27	0.951	1.701
28	0.951	1.707
29	0.948	1.703
30	0.949	1.694
31	0.947	1.701
32	0.951	1.695
33	0.952	1.697
34	0.948	1.695
35	0.949	1.699
36	0.948	1.698
37	0.952	1.697
38	0.949	1.699
39	0.947	1.693
40	0.951	1.697
41	0.948	1.697
42	0.946	1.696
43	0.949	1.692
44	0.948	1.697
45	0.948	1.693
46	0.954	1.698
47	0.952	1.692
48	0.950	1.691
49	0.949	1.698
50	0.950	1.697
Average	0.95	1.70
Cmk	4.27	7.48

Acceptance criteria: Cmk>= 2.0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	TEMPORARY	TERMINAL No. 端子品番	7116-4362
共通品番	– – – – – –		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-4362XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	-001	FEEDING CLAW 送り爪
2	7116-4362TXI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7116-4362TXA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	-002	TERMINAL SCRAPER 端子掻き落とし
4	7116-4362XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7116-4362XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7116-4362XYB		BASE ﾍﾞｰｽ	22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7116-4362XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	-004	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	-002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	-A04	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	-001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7116-4362XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	-001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27	~~7116-4362XQ~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	-001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	-027	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	-001	BUSH ﾌﾞｯｼｭ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	-001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					PTC		
					DESIGNED DATE 設計日		
					27-09-2017		
					APPROVED 承認	DESIGNED 設計	
					S.Junior	C.Almeida	
					27-09-2017	27-09-2017	