APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2101E011






TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71960296 SEQUENCE Nº 9




Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7196-0296-02	*	**MYS**	**YSD-3500206819**	*

Anvil			Wire Crimper			Insulation Crimper		
7196-0296XA		(N)	7196-0296XW		(N)	7196-0296XI		(N)
CW (c)	1.04	*CW (i)* 1.57	*CW*	1.02		*CW*	1.57	

1 - VISUAL CHECK ITEMS

O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, looking from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.68	0.68	2.60
	+/-0.02		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range 0.13mm²~0.13mm².
Size 0.13mm² C/W(I)-1.50mm

EVALUATION DECISION

SUITABLE	X
NOT SUITABLE	

FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2988
		Jitor Hugo
Date: 2021/Feb/05	Date: 2021/Feb/05	Date: 2021/Feb/04

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2101E011

LOWER WIRE KIND & SIZE

Wire kind: B2M

Wire size: 0.13 mm²

Nominal Cr. Height:	0.68	1.35	mm
+/-	0.02	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.688	1.352
2	0.683	1.352
3	0.682	1.349
4	0.682	1.350
5	0.684	1.348
6	0.680	1.347
7	0.681	1.350
8	0.683	1.351
9	0.681	1.346
10	0.685	1.352
11	0.681	1.346
12	0.681	1.347
13	0.685	1.351
14	0.681	1.345
15	0.682	1.349
16	0.680	1.353
17	0.682	1.351
18	0.685	1.346
19	0.685	1.353
20	0.684	1.353
21	0.684	1.349
22	0.685	1.354
23	0.681	1.352
24	0.684	1.348
25	0.684	1.354
26	0.681	1.356
27	0.683	1.350
28	0.686	1.352
29	0.681	1.355
30	0.680	1.350
31	0.686	1.348
32	0.684	1.353
33	0.681	1.354
34	0.684	1.353
35	0.685	1.349
36	0.680	1.354
37	0.683	1.356
38	0.687	1.349
39	0.684	1.352
40	0.683	1.351
41	0.682	1.347
42	0.685	1.349
43	0.685	1.354
44	0.683	1.349
45	0.682	1.347
46	0.687	1.352
47	0.687	1.347
48	0.683	1.352
49	0.685	1.354
50	0.687	1.349
Average	0.68	1.35
Cmk	2.60	11.68

UPPER WIRE KIND & SIZE

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

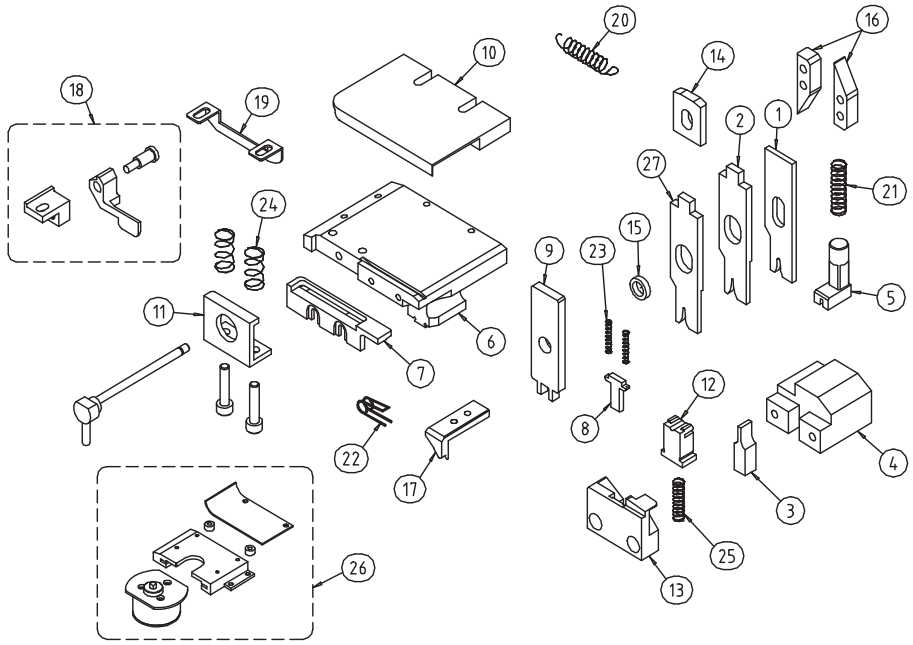
Acceptance criteria: Cmk>= 2.0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-6461	TERMINAL No. 端子品番	7196-0296

Common PN 共通品番	–	–	–	–
	–	–		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7196-0296XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	-001	FEEDING CLAW 送り爪
2	7196-0296XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7196-0296XA		ANVIL アンビル	19	48A19047	-003	TERMINAL SCRAPER 端子掻き落とし
4	7196-0296XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7196-0296XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7196-0296XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7196-0296XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-001	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャープレートスプリング
10	48A47020	-A03	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ		7196-0296XKP		BRACKET ブラケット
12	48A47024	-001	SHEARBLADE シャープレート	27	~~7196-0296XQ~~		~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	-001	OUTER SHEARBLADE アウターシャープレート	〈OPTION オプション〉			
14	48A19007	-026	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャープレート
15	48A19019	-016	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-003	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					MTC		ISSUE 2016/03/15 YAZAKI PARTS CO.LTD HAIBARA OFFICE
					DESIGNED DATE 設計日		
					2015/12/14		
					APPROVED 承認	DESIGNED 設計	
					H.HASEGAWA	JIL	
					2016/3/8	2015/12/14	