PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2101E012

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72145943 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7214-5943-02	*	MXSR	4514204129	DAIMLER TRUCK - NCP

Applicable Terminals for this Tool:







7214-5943-02

Anvil		
7214-5943XA		(N)
CW (c) 1.70	CW (i) 2.29	

Wire Crimper		
7214-5943XW		(N)
CW 1.68		

Insulation Crimper		
7214-5943XI		(N)
CW 2.29		

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0 - 0.35 mm 0.15 - 0.35 mm	0.35 0.35		The Bell Mouth is within the spec.	O
	Not found any Bell Mouth in the insulation area.	O	0 - 0.3 mm	0.2		The dimension of the cutting carrier is within the spec.	O
	The lance height and shape are not deformed.	O	0 - 0.2 mm 0 - 0.2 mm	0.07		Bend up and Bend down are within the criteria.	O
	Not found any burr in the cutting carrier.	O	0.1 - 0.4 mm	0.4		The exposed conductor is within the spec.	O
	Not found any crack in the terminal.	O	0 - 3 °	1.4		The terminal is not bent sideways while looking from the top.	O
	The wire barrel is free from burrs.	O	0 - 0.3 mm	0.14		The body of the terminal is not twisted.	O

(*) - Specified on Crimping Spec.

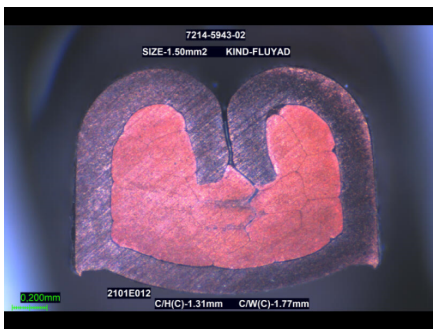
(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE

UPPER WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1.1	1.10	4.55
	+/- 0.05		

	NOMINAL	AVERAGE	Cmk
mm	1.31	1.30	4.74
	+/- 0.05		

REMARKS:

Applicable wire range-1.00~1.50mm2

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) nº3485	CHECKED (Operator) nº19477	PREPARED (Operator) nº2624
	Renato Tavares	
Date: 07/05/2025	Date: 07/05/2025	Date: 07/05/2025

YAZAKI

PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial N°

2101E012

LOWER WIRE KIND & SIZE

C/W(I): 2.37 mm

Wire kind: FLUYAD

Wire size: 1.00 mm²

Nominal Cr. Height:	1.1	2.3	mm
+/-	0.05	0.1	mm

Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.103	2.306
2	1.099	2.303
3	1.100	2.310
4	1.102	2.313
5	1.102	2.307
6	1.102	2.307
7	1.098	2.303
8	1.103	2.322
9	1.098	2.307
10	1.104	2.308
11	1.099	2.308
12	1.100	2.310
13	1.100	2.296
14	1.102	2.305
15	1.103	2.313
16	1.108	2.311
17	1.104	2.302
18	1.103	2.303
19	1.098	2.308
20	1.102	2.313
21	1.103	2.309
22	1.101	2.295
23	1.105	2.305
24	1.101	2.297
25	1.107	2.308
26	1.102	2.308
27	1.097	2.295
28	1.092	2.297
29	1.099	2.324
30	1.099	2.313
31	1.109	2.306
32	1.095	2.305
33	1.106	2.309
34	1.102	2.312
35	1.098	2.307
36	1.095	2.308
37	1.100	2.310
38	1.103	2.302
39	1.109	2.314
40	1.106	2.319
41	1.103	2.294
42	1.109	2.305
43	1.100	2.311
44	1.101	2.303
45	1.103	2.305
46	1.099	2.310
47	1.102	2.308
48	1.098	2.299
49	1.102	2.311
50	1.103	2.316
Average	1.10	2.31
Cmk	4.55	4.85

UPPER WIRE KIND & SIZE

C/W(I): 2.42 mm

Wire kind: FLUYAD

Wire size: 1.50 mm²

Nominal Cr. Height:	1.31	2.5	mm
+/-	0.05	0.1	mm


Sample number	Crimp height **WIRE** (mm)	Crimp height **INSULATION** (mm)
1	1.312	2.504
2	1.311	2.503
3	1.303	2.503
4	1.300	2.502
5	1.302	2.502
6	1.305	2.501
7	1.306	2.514
8	1.301	2.506
9	1.306	2.496
10	1.309	2.501
11	1.300	2.505
12	1.302	2.504
13	1.301	2.507
14	1.309	2.515
15	1.303	2.510
16	1.304	2.501
17	1.301	2.499
18	1.303	2.507
19	1.302	2.502
20	1.308	2.508
21	1.304	2.507
22	1.306	2.512
23	1.301	2.500
24	1.304	2.491
25	1.301	2.497
26	1.302	2.502
27	1.304	2.500
28	1.304	2.505
29	1.295	2.496
30	1.304	2.492
31	1.306	2.517
32	1.302	2.499
33	1.304	2.506
34	1.304	2.502
35	1.300	2.504
36	1.306	2.502
37	1.306	2.503
38	1.304	2.519
39	1.305	2.504
40	1.307	2.508
41	1.310	2.500
42	1.305	2.506
43	1.308	2.500
44	1.303	2.508
45	1.307	2.494
46	1.305	2.506
47	1.306	2.512
48	1.304	2.501
49	1.303	2.503
50	1.307	2.505
Average	1.30	2.50
Cmk	4.74	5.60

Acceptance criteria: Cmk >= 2

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-4453	TERMINAL No. 端子品番	7214-5943
共通品番	– – – – – – – –		

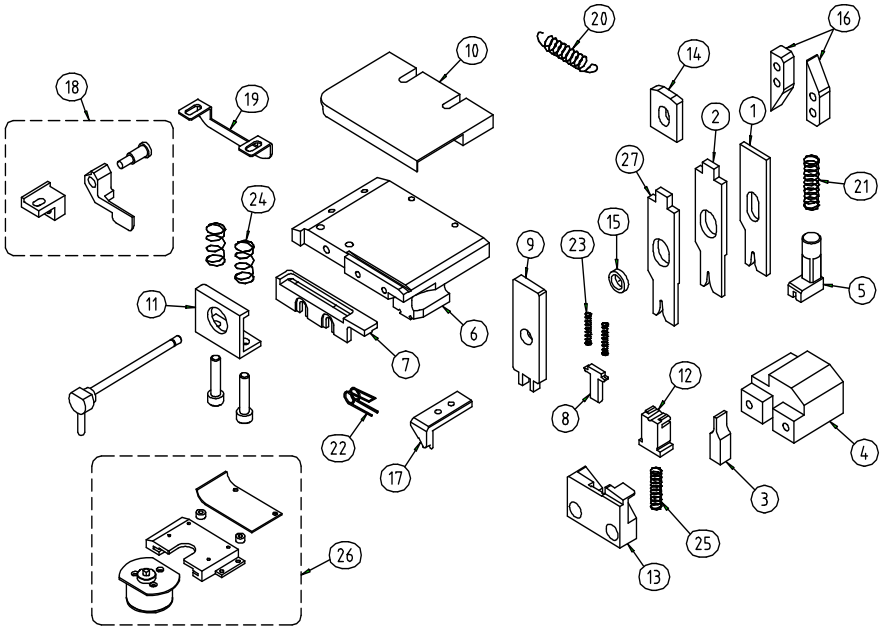

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7214-5943XW		WIRE CRIMPER ワイヤークリンパー
2	7214-5943XI		INSULATION CRIMPER インシュレーションクリンパー
3	7214-5943XA		ANVIL アンビル
4	7214-5943XJE		ANVIL HOLDER アンビルホルダー
5	7214-5943XYY		SUPPORTING STOPPER サポーティングストッパー
6	7214-5943XYB		BASE ベース
7	7214-5943XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB
8	48A47016	-001	WIRE HOLDER 電線押さえ
9	48A47017	-002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー
10	48A47020	-A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ
12	48A47024	-001	SHEARBLADE シャーブレード
13	48A47025	-001	OUTER SHEARBLADE アウターシャーブレード
14	48A19007	-021	INSULATION ADJUSTING PIECE インシュレーション調整コマ
15	48A19019	-019	BUSH ブッシュ
16	48A47014	-003	FEEDING CAM 送りカム

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
17	48A47013	-001	FEEDING CLAW 送り爪
18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
19	48A19047	-003	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しスプリング
21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
	7214-5943XKP		BRACKET ブラケット
27	~~7214-5943XQ~~		~~STABILIZER CRIMPER スタビライザークリンパー~~
〈OPTION オプション〉			
13	48A47025	-101	OUTER SHEARBLADE アウターシャーブレード
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署	
YRL	
DESIGNED DATE 設計日	
24-01-2008	
APPROVED 承認	DESIGNED 設計
K,Hiraguchi	C.Almeida
24-01-2008	24-01-2008

ISSUED 発行