PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2102E002

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72167476 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7216-7476-02	*	**MYK**	**YSD-3500207944**	*





Anvil		
7216-7476XA		(A)
CW (c) 1.04	*CW (i)* 1.57	





Wire Crimper		
7216-7476XW		(A)
CW 1.02		

Insulation Crimper		
7216-7476XI		(1)
CW 1.57		

1 - VISUAL CHECK ITEMS

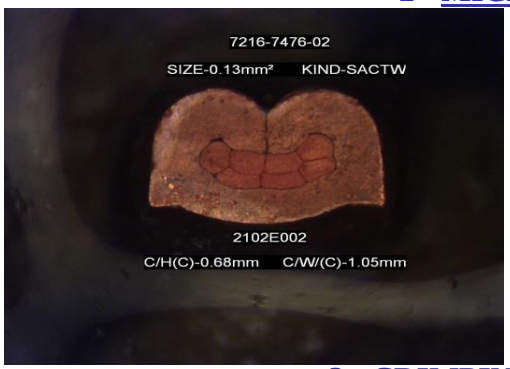
O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.68	0.68	2.08
	+/-0.02		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range-0.13mm²~0.13mm².
Wire size 0.13mm² C/W(I)-1.46mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2021/Mar/01	Date: 2021/Feb/25	Date: 2021/Feb/24

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2102E002

LOWER WIRE KIND & SIZE

Wire kind: SACTW

Wire size: 0.13 mm²

Nominal Cr. Height:	0.68	1.25	mm
+/-	0.02	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.685	1.262
2	0.685	1.258
3	0.684	1.258
4	0.687	1.267
5	0.683	1.256
6	0.686	1.252
7	0.686	1.260
8	0.684	1.247
9	0.686	1.252
10	0.680	1.243
11	0.689	1.246
12	0.686	1.259
13	0.680	1.245
14	0.679	1.251
15	0.684	1.243
16	0.685	1.253
17	0.682	1.261
18	0.684	1.264
19	0.682	1.255
20	0.685	1.260
21	0.681	1.251
22	0.685	1.264
23	0.683	1.253
24	0.680	1.253
25	0.684	1.264
26	0.681	1.258
27	0.681	1.253
28	0.683	1.257
29	0.682	1.270
30	0.684	1.254
31	0.682	1.249
32	0.683	1.260
33	0.683	1.256
34	0.683	1.251
35	0.680	1.251
36	0.677	1.258
37	0.683	1.248
38	0.677	1.262
39	0.683	1.250
40	0.684	1.250
41	0.684	1.264
42	0.679	1.250
43	0.683	1.245
44	0.683	1.256
45	0.681	1.257
46	0.674	1.246
47	0.682	1.256
48	0.678	1.253
49	0.680	1.263
50	0.681	1.262
Average	0.68	1.26
Cmk	2.08	4.88

UPPER WIRE KIND & SIZE

Wire kind: NA + NA

Wire size: NA + NA mm²

Nominal Cr. Height:	NA	NA	mm
+/-	NA	NA	mm

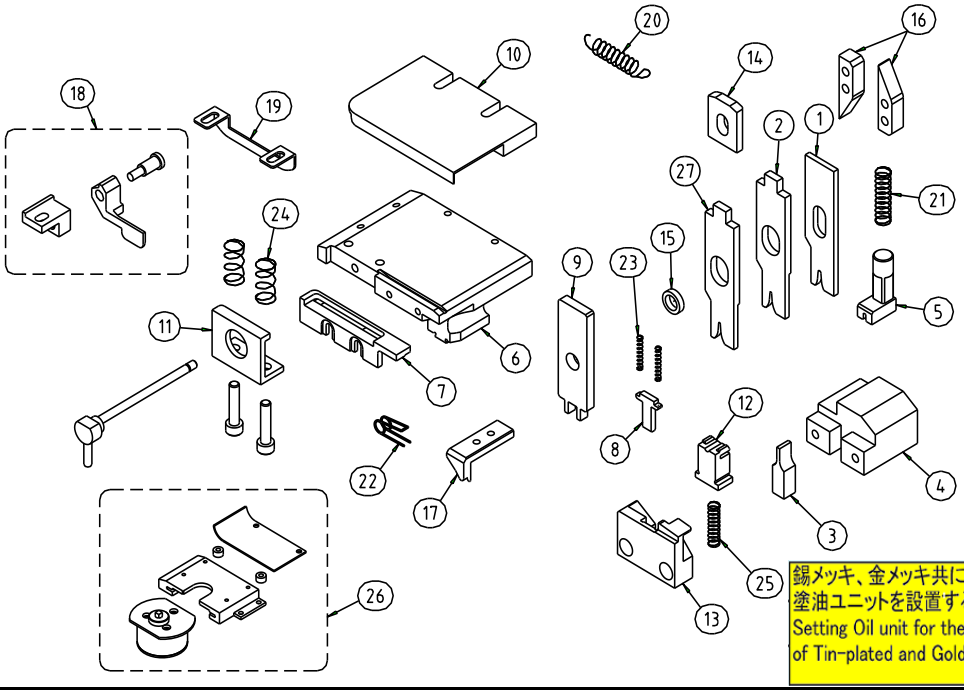
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2.0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-5537	TERMINAL No. 端子品番	7216-7476
共通品番	– / –	– / –	– / –



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7216-7476XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	-001	FEEDING CLAW 送り爪
2	7216-7476XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7216-7476XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	-002 ①	TERMINAL SCRAPER 端子掻き落とし
4	7216-7476XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7216-7476XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7216-7476XYB		BASE ﾍﾞｰｽ	22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7216-7476XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	-001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	-001	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	-A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	-001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7216-7476XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	-001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27	48A47046 ①		CONDUCTOR HOLDER
13	48A47025	-001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	28	48A47047 ①		CONDUCTOR HOLDER SPRING
14	48A19007	-027	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	〈OPTION ｵﾌﾟｼｮﾝ〉			
15	48A19019	-010 ①	BUSH ﾌﾞｯｼｭ	13	48A47025	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
16	48A47014	-003	FEEDING CAM 送りｶﾑ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
①	06-05-2014	017->010 ; 003->002 Add 48A47046 ／ 48A47047		C.Almeida

APPRICATION POST 申請部署		
YOTG		
DESIGNED DATE 設計日		
07-09-2012		
APPROVED 承認	DESIGNED 設計	ISSUED 発行
T,Maki	C.Almeida	
07-09-2012	07-09-2012	