PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2102E008

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72960388 SEQUENCE Nº 9






Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7296-0388-06	**7157-3037-07**	**MYO**	**YSD-3500206819**	*

Anvil		
7296-0388XAD		(N)
CW (c) 0.99	*CW (i)* 3.00	



Wire Crimper		
7296-0388XW		(N)
CW 0.97		

Insulation Crimper		
7296-0388XID		(N)
CW 3.00		

1 - VISUAL CHECK ITEMS

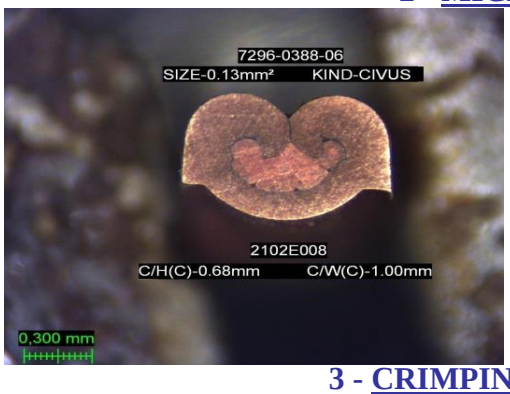
	The two sides of the insulation grips are in the correct position.	O
	Not found any Bell Mouth in the insulation area.	O
	The lance height and shape are not deformed.	O
	Not found any burr in the cutting carrier.	O
	Not found any crack in the terminal.	O
	The wire barrel is free from major burrs.	O

O - ok **X** - ng **NA** - not aplicable

	The Bell Mouth is within the spec.**(*)**	O
	The dimension of the cutting carrier is within the spec.**(*)**	O
	Bend up and Bend down are within the criteria**(*)**	O
	The exposed conductor is within the spec.(*)	O
	The terminal is not bent sideway, look-king from the top**(*)**	O
	The body of the terminal is not twisted**(*)**	O

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.68	0.68	3.10
	+/-0.03		

	NOMINAL	AVERAGE	Cmk
mm	0.74	0.74	2.78
	+/-0.03		

REMARKS:

Aplicable Wire Range 0.13mm²~0.22mm²
Wire 0.13mm² C/W(I)-2.92mm
Wire 0.22mm² C/W(I)-2.95mm

EVALUATION DECISION

SUITABLE [X] FOR USE IN PRODUCTION
NOT SUITABLE [ ]

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 678
Date: 2021/Mar/29	Date: 2021/Mar/29	Date: 2021/Mar/25

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2102E008

LOWER WIRE KIND & SIZE

Wire kind: CIVUS

Wire size: 0.13 mm²

Nominal Cr. Height:	0.68	2.8	mm
+/-	0.03	0.05	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.686	2.806
2	0.690	2.816
3	0.686	2.802
4	0.691	2.812
5	0.686	2.805
6	0.686	2.808
7	0.682	2.814
8	0.680	2.802
9	0.684	2.814
10	0.688	2.809
11	0.688	2.805
12	0.688	2.803
13	0.685	2.801
14	0.684	2.798
15	0.683	2.811
16	0.685	2.814
17	0.689	2.817
18	0.689	2.813
19	0.686	2.804
20	0.683	2.800
21	0.682	2.799
22	0.682	2.814
23	0.681	2.819
24	0.683	2.821
25	0.685	2.810
26	0.685	2.801
27	0.688	2.799
28	0.686	2.802
29	0.684	2.801
30	0.683	2.811
31	0.682	2.814
32	0.682	2.802
33	0.686	2.815
34	0.686	2.812
35	0.686	2.804
36	0.683	2.802
37	0.682	2.811
38	0.682	2.802
39	0.680	2.808
40	0.682	2.812
41	0.683	2.809
42	0.683	2.806
43	0.683	2.808
44	0.682	2.813
45	0.681	2.808
46	0.683	2.800
47	0.687	2.803
48	0.690	2.808
49	0.684	2.809
50	0.682	2.804
Average	0.68	2.81
Cmk	3.10	2.42

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0.22 mm²

Nominal Cr. Height:	0.74	2.9	mm
+/-	0.03	0.05	mm

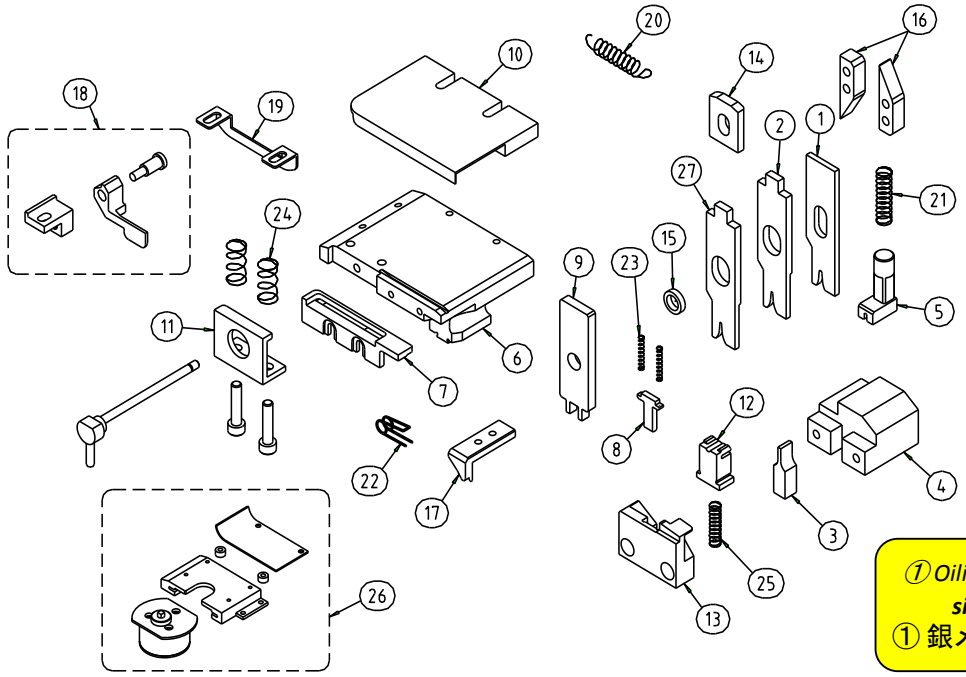
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.746	2.910
2	0.741	2.899
3	0.742	2.904
4	0.746	2.909
5	0.744	2.914
6	0.744	2.919
7	0.741	2.911
8	0.739	2.905
9	0.743	2.902
10	0.747	2.901
11	0.749	2.908
12	0.748	2.914
13	0.746	2.917
14	0.746	2.907
15	0.744	2.904
16	0.748	2.903
17	0.750	2.899
18	0.752	2.906
19	0.745	2.904
20	0.745	2.911
21	0.743	2.915
22	0.741	2.917
23	0.741	2.912
24	0.746	2.904
25	0.750	2.903
26	0.749	2.910
27	0.745	2.901
28	0.742	2.900
29	0.741	2.906
30	0.741	2.900
31	0.741	2.905
32	0.745	2.909
33	0.748	2.915
34	0.746	2.910
35	0.744	2.905
36	0.742	2.907
37	0.741	2.909
38	0.747	2.912
39	0.747	2.907
40	0.744	2.904
41	0.742	2.914
42	0.741	2.906
43	0.748	2.902
44	0.749	2.900
45	0.745	2.903
46	0.744	2.910
47	0.748	2.903
48	0.747	2.906
49	0.745	2.906
50	0.744	2.901
Average	0.74	2.91
Cmk	2.78	2.77

Acceptance criteria: Cmk>= 2.0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-6362	TERMINAL No. 端子品番	7296-0388 DD
共通品番	– – – – – – – –		



① Oiling unit standard equipment for **silver** plated variations (**06**).
① 銀メッキバリエーション用給油ユ

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7296-0388XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	-001	FEEDING CLAW 送り爪
2	7296-0388XI		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	-005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7296-0388XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	-001	TERMINAL SCRAPER 端子掻き落とし
4	7296-0388XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7296-0388XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	-001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7296-0388XYB		BASE ﾍﾞｰｽ	22	48A19017	-003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7296-0388XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	-002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	-003	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾞﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	-A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	-001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7296-0388XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	-001	SHEARBLADE ｼｬｰﾌﾞﾚｰﾄﾞ	27	~~7296-0388XQ~~		~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	-002	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ	<OPTION ｵﾌﾟｼｮﾝ>			
14	48A19007	-015	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	-101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾞﾚｰﾄﾞ
15	48A19019	-027	BUSH ﾌﾞｯｼｭ	14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	-003	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	DESIGNED 設計	ISSUED 発行
					MTC		
					DESIGNED DATE 設計日		
					03-10-2015		
					APPROVED 承認	DESIGNED 設計	
①	02-02-2021	Oiling unit addition	PTC	F.Loureiro	H.Hasegawa	JIL	
					02-12-2015	03-10-2015	

試

PROVISIONAL