APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)






Applicator Serial Nº
2102E053

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 72960388 SEQUENCE Nº 9


Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7296-0388-02	**7157-3037-70**	**MYD**	**YSD-3500214232**	*

Anvil			Wire Crimper			Insulation Crimper		
7296-0388XAD		(N)	7296-0388XW		(N)	7296-0388XID		(N)
CW (c)	0.99	*CW (i)* 3.00	*CW*	0.97		*CW*	3.00	

1 - VISUAL CHECK ITEMS

	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

O - ok **X** - ng **NA** - not aplicable

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0.68	0.68	2.96
	+/-0.02		

	NOMINAL	AVERAGE	Cmk
mm	0.74	0.74	2.14
	+/-0.02		

REMARKS:

Aplicable Wire Range 0.13mm²~0.22mm²
Wire 0.13mm² C/W(I)-2.95mm
Wire 0.22mm² C/W(I)-2.96mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 678
Date: 2021/Mar/29	Date: 2021/Mar/29	Date: 2021/Mar/25

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2102E053

LOWER WIRE KIND & SIZE

Wire kind: B2M

Wire size: 0.13 mm²

Nominal Cr. Height:	0.68	2.8	mm
+/-	0.02	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.688	2.820
2	0.683	2.817
3	0.687	2.821
4	0.686	2.812
5	0.684	2.817
6	0.684	2.816
7	0.687	2.821
8	0.685	2.817
9	0.684	2.811
10	0.683	2.819
11	0.680	2.813
12	0.684	2.821
13	0.685	2.814
14	0.687	2.814
15	0.684	2.819
16	0.684	2.809
17	0.684	2.822
18	0.686	2.825
19	0.687	2.823
20	0.684	2.816
21	0.683	2.812
22	0.686	2.812
23	0.685	2.820
24	0.683	2.823
25	0.685	2.823
26	0.685	2.818
27	0.683	2.814
28	0.682	2.813
29	0.682	2.815
30	0.685	2.813
31	0.684	2.809
32	0.682	2.816
33	0.682	2.821
34	0.685	2.817
35	0.685	2.814
36	0.682	2.817
37	0.682	2.819
38	0.685	2.823
39	0.685	2.818
40	0.683	2.811
41	0.687	2.808
42	0.683	2.807
43	0.683	2.818
44	0.687	2.822
45	0.687	2.822
46	0.683	2.817
47	0.684	2.814
48	0.684	2.821
49	0.687	2.811
50	0.684	2.812
Average	0.68	2.82
Cmk	2.96	6.15

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0.22 mm²

Nominal Cr. Height:	0.74	2.9	mm
+/-	0.02	0.1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0.740	2.898
2	0.745	2.903
3	0.740	2.899
4	0.746	2.909
5	0.739	2.909
6	0.743	2.906
7	0.741	2.902
8	0.740	2.898
9	0.745	2.909
10	0.748	2.910
11	0.744	2.914
12	0.744	2.917
13	0.746	2.907
14	0.742	2.905
15	0.741	2.901
16	0.743	2.911
17	0.741	2.914
18	0.739	2.915
19	0.744	2.899
20	0.740	2.902
21	0.743	2.905
22	0.740	2.910
23	0.746	2.912
24	0.745	2.913
25	0.744	2.913
26	0.742	2.907
27	0.744	2.913
28	0.746	2.914
29	0.747	2.914
30	0.742	2.911
31	0.745	2.918
32	0.746	2.916
33	0.744	2.910
34	0.744	2.907
35	0.746	2.907
36	0.745	2.912
37	0.741	2.913
38	0.742	2.907
39	0.743	2.902
40	0.745	2.900
41	0.745	2.899
42	0.739	2.908
43	0.747	2.913
44	0.748	2.902
45	0.747	2.901
46	0.743	2.908
47	0.744	2.911
48	0.748	2.898
49	0.746	2.908
50	0.745	2.905
Average	0.74	2.91
Cmk	2.14	5.48

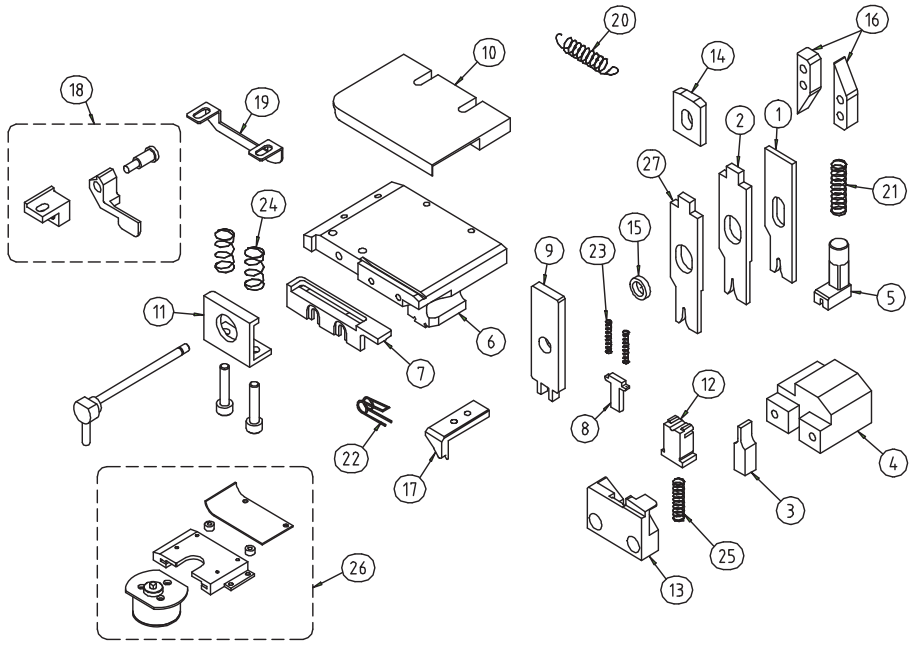
Acceptance criteria: Cmk>= 2.0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-6362	TERMINAL No. 端子品番	7296-0388 DD

Common PN 共通品番	–	–	–	–
	–	–		



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7296-0388XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	-001	FEEDING CLAW 送り爪
2	7296-0388XID		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7296-0388XAD		ANVIL アンビル	19	48A19047	-001	TERMINAL SCRAPER 端子掻き落とし
4	7296-0388XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7296-0388XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7296-0388XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7296-0388XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-003	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャープレードスプリング
10	48A47020	-A03	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ		7296-0388XKP		BRACKET ブラケット
12	48A19049	-001	SHEARBLADE シャープレード	27	~~7296-0388XQ~~		~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	-002	OUTER SHEARBLADE アウターシャープレード	〈OPTION オプション〉			
14	48A19007	-015	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャープレード
15	48A19019	-027	BUSH ブッシュ	14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-003	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					MTC		ISSUE 2016/03/15 YAZAKI PARTS CO.LTD HAIBARA OFFICE
					DESIGNED DATE 設計日		
					2015/3/10		
					APPROVED 承認	DESIGNED 設計	
					H.HASEGAWA	JIL	
					2015/12/2	2015/3/10	