PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2105E012

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 71144698 SEQUENCE Nº 9

Terminal Nº	Rubber Seal	Applicator Type	Purchasing Order Nº	Project / Model
7114-4698-02	*	**MYS**	**YSD-3500214539**	*





Anvil		
7114-4698XA		(N)
CW (c) 1,62	*CW (i)* 2,45	





Wire Crimper	
7114-4698XW	(1)
CW 1,60	

Insulation Crimper	
7114-4698XI	(1)
CW 2,45	

1 - VISUAL CHECK ITEMS

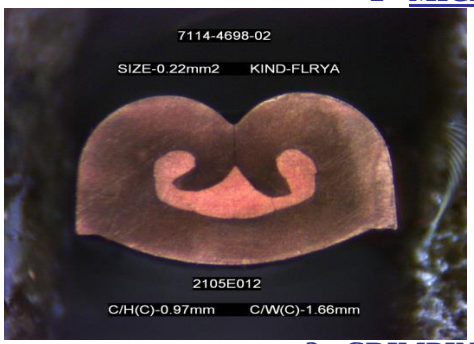
O - ok **X** - ng **NA** - not aplicable

	The two sides of the insulation grips are in the correct position.	**O**
	Not found any Bell Mouth in the insulation area.	**O**
	The lance height and shape are not deformed.	**O**
	Not found any burr in the cutting carrier.	**O**
	Not found any crack in the terminal.	**O**
	The wire barrel is free from major burrs.	**O**

	The Bell Mouth is within the spec.**(*)**	**O**
	The dimension of the cutting carrier is within the spec.**(*)**	**O**
	Bend up and Bend down are within the criteria**(*)**	**O**
	The exposed conductor is within the spec.(*)	**O**
	The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The body of the terminal is not twisted**(*)**	**O**

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	0,97	0,97	4,67
	+/-0,05		

	NOMINAL	AVERAGE	Cmk
mm	1	1,01	3,18
	+/-0,05		

REMARKS:

Aplicable wire range-0.22~0.50mm^2
Size 0.22mm^2 C/W(I)-2.43mm
Size 0.50mm^2 C/W(I)-2.45mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 2624
Date: 2021/mai/27	Date: 2021/mai/20	Date: 2021/mai/19

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2105E012

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,22 mm²

Nominal Cr. Height:	0,97	1,8	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0,970	1,805
2	0,973	1,807
3	0,972	1,801
4	0,968	1,804
5	0,971	1,808
6	0,975	1,813
7	0,976	1,816
8	0,974	1,812
9	0,971	1,807
10	0,967	1,803
11	0,971	1,805
12	0,975	1,811
13	0,976	1,813
14	0,978	1,809
15	0,974	1,805
16	0,970	1,803
17	0,973	1,804
18	0,977	1,808
19	0,980	1,813
20	0,978	1,811
21	0,973	1,807
22	0,971	1,803
23	0,974	1,806
24	0,976	1,810
25	0,980	1,812
26	0,979	1,810
27	0,975	1,806
28	0,972	1,803
29	0,976	1,805
30	0,978	1,811
31	0,975	1,813
32	0,972	1,811
33	0,974	1,808
34	0,977	1,805
35	0,979	1,808
36	0,977	1,812
37	0,973	1,814
38	0,970	1,814
39	0,974	1,812
40	0,979	1,809
41	0,978	1,808
42	0,974	1,811
43	0,977	1,814
44	0,980	1,812
45	0,979	1,808
46	0,975	1,806
47	0,977	1,809
48	0,976	1,812
49	0,978	1,811
50	0,975	1,808
Average	0,97	1,81
Cmk	4,67	8,37

UPPER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,5 mm²

Nominal Cr. Height:	1	2	mm
+/-	0,05	0,1	mm

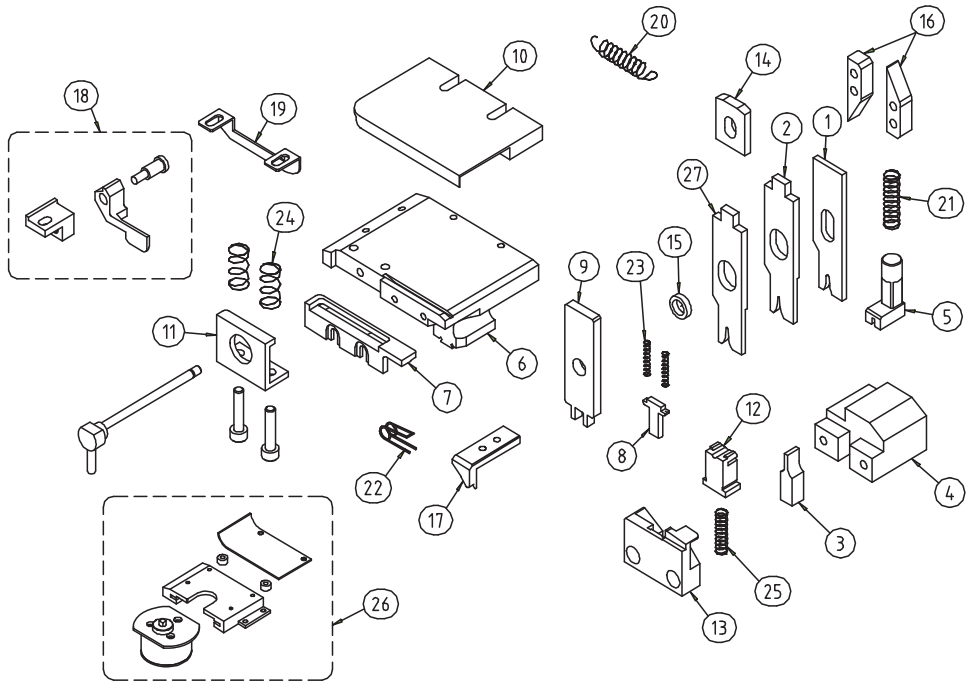
Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,005	2,020
2	1,011	2,024
3	1,009	2,026
4	1,007	2,020
5	1,011	2,016
6	1,014	2,020
7	1,018	2,024
8	1,014	2,026
9	1,008	2,024
10	1,004	2,020
11	1,009	2,017
12	1,013	2,023
13	1,019	2,026
14	1,016	2,030
15	1,008	2,027
16	1,004	2,024
17	1,007	2,020
18	1,012	2,025
19	1,015	2,026
20	1,012	2,028
21	1,009	2,027
22	1,005	2,024
23	1,009	2,021
24	1,015	2,023
25	1,018	2,026
26	1,015	2,029
27	1,011	2,027
28	1,008	2,024
29	1,012	2,021
30	1,015	2,023
31	1,019	2,028
32	1,017	2,030
33	1,013	2,028
34	1,010	2,024
35	1,012	2,022
36	1,014	2,025
37	1,018	2,027
38	1,018	2,024
39	1,015	2,020
40	1,011	2,017
41	1,009	2,021
42	1,014	2,019
43	1,016	2,014
44	1,015	2,018
45	1,013	2,015
46	1,011	2,009
47	1,013	2,014
48	1,016	2,017
49	1,014	2,012
50	1,012	2,009
Average	1,01	2,02
Cmk	3,18	5,05

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 ｱﾌﾟﾘｹｰﾀｰ 消耗部品表

PRODUCT No. 製品番号	C0100-1107	TERMINAL No. 端子品番	7114-4698
Common PN 共通品番	–	–	–
	–	–	



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7114-4698XW		WIRE CRIMPER ﾜｲﾔｰｸﾘﾝﾊﾟｰ	17	48A47013	001	FEEDING CLAW 送り爪
2	7114-4698XW		INSULATION CRIMPER ｲﾝｼｭﾚｰｼｮﾝｸﾘﾝﾊﾟｰ	18	48A19100	005	WIRE STOPPER Assy 電線ｽﾄｯﾊﾟｰ ｱｯｼｰ
3	7114-4698XA		ANVIL ｱﾝﾋﾞﾙ	19	48A19047	003	TERMINAL SCRAPER 端子掻き落とし
4	7114-4698XJE		ANVIL HOLDER ｱﾝﾋﾞﾙﾎﾙﾀﾞｰ	20	48A47031		RETURN SPRING 戻しｽﾌﾟﾘﾝｸﾞ
5	7114-4698XYY		SUPPORTING STOPPER ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰ	21	48A47032	001	SUPPORTING STOPPER SPRING ｻﾎﾟｰﾃｨﾝｸﾞｽﾄｯﾊﾟｰｽﾌﾟﾘﾝｸﾞ
6	7114-4698XYB		BASE ﾍﾞｰｽ	22	48A19017	003	FEEDING CLAW SPRING 送り爪ｽﾌﾟﾘﾝｸﾞ
7	7114-4698XYH		TERMINAL GUIDE PLATE B ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえｽﾌﾟﾘﾝｸﾞ
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ﾀｰﾐﾅﾙ押さえｽﾌﾟﾘﾝｸﾞ
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ﾎﾟﾝﾁ兼電線押さえﾎﾙﾀﾞｰ	25	48A19050		SHEARBLADE SPRING ｼｬｰﾌﾟﾚｰﾄﾞｽﾌﾟﾘﾝｸﾞ
10	48A47020	A03	TERMINAL GUIDE PLATE A ﾀｰﾐﾅﾙｶﾞｲﾄﾞﾌﾟﾚｰﾄA	26	48A19999		TERMINAL OIL UNIT ﾀｰﾐﾅﾙ塗油ﾕﾆｯﾄ
11	48A47022	001	TERMINAL HOLDER ﾀｰﾐﾅﾙ押さえ		7114-4698XKP		BRACKET ﾌﾞﾗｹｯﾄ
12	48A47024	001	SHEARBLADE ｼｬｰﾌﾟﾚｰﾄﾞ	27			~~STABILIZER CRIMPER ｽﾀﾋﾞﾗｲｻﾞｰｸﾘﾝﾊﾟｰ~~
13	48A47025	001	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ	〈OPTION ｵﾌﾟｼｮﾝ〉			
14	48A19007	027	INSULATION ADJUSTING PIECE ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ	13	48A47025	101	OUTER SHEARBLADE ｱｳﾀｰｼｬｰﾌﾟﾚｰﾄﾞ
15	48A19019	014	BUSH ﾌﾞｯｼｭ	14	48A47042	001	INSULATION ADJUSTING PIECE(MECAL) ｲﾝｼｭﾚｰｼｮﾝ調整ｺﾏ(ﾒｶﾙ)
16	48A47014	001	FEEDING CAM 送りｶﾑ				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検

APPRICATION POST 申請部署	
HIB	
DESIGNED DATE 設計日	
2008/2/21	
APPROVED 承認	DESIGNED 設計
T,Maki	T,Suzuki
2008/2/21	2008/2/21

ISSUED 発行

ISSUE
2016/12/13
YAZAKI PARTS CO.LTD HAIBARA OFFICE