PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2405E018

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7116-5712 * SEQUENCE Nº 9










Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-5712-02	**7157-3345-40**	**MXD**	**YSD-4514078965**	**AIMLER/TRUCK B**

Applicable Terminals for this Tool:

7116-5712-02			

Anvil			Wire Crimper			Insulation Crimper		
7116-5712XAD		(N)	7116-5712XW		(N)	7116-5712XID		(N)
CW (c)	1,75	*CW (i)* 3,08	*CW*	1,73		*CW*	3,08	


1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)			
					O - ok **X** - ng **NA** - not aplicable		
	The two sides of the insulation grips are in the correct position.	**O**	0~0.30mm 0.20~0.60mm	0.22 0.38		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**O**	0~0.30mm	0.19		The dimension of the cutting carrier is within the spec.**(*)**	**O**
	The lance height and shape are not deformed.	**O**	0~0.40mm 0~0.40mm	0.01 -		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**O**	0.10~0.60mm	0.23		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	3º	0.6		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	0~0.40mm	0.10		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

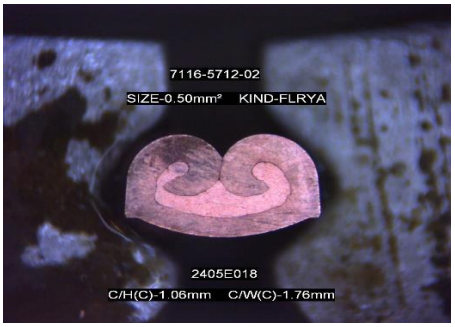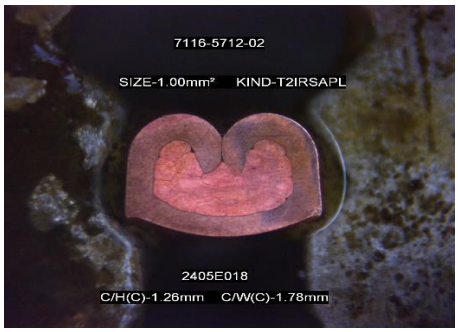2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,05	1,05	2,92
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1,25	1,25	2,47
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm.
Wire size 0.50mm² C/W(I)-3.19mm
Wire size 1.00mm² C/W(I)-3.21mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2024/jul/08	Date: 2024/jun/25	Date: 2024/jun/25

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2405E018

LOWER WIRE KIND & SIZE

Wire kind: FLRYA

Wire size: 0,5 mm^2

Nominal Cr. Height:	1,05	3,1	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,053	3,110
2	1,057	3,105
3	1,056	3,102
4	1,051	3,097
5	1,061	3,112
6	1,061	3,104
7	1,054	3,102
8	1,047	3,118
9	1,043	3,114
10	1,052	3,105
11	1,049	3,120
12	1,049	3,116
13	1,057	3,116
14	1,052	3,120
15	1,050	3,111
16	1,061	3,123
17	1,056	3,117
18	1,049	3,105
19	1,050	3,121
20	1,058	3,105
21	1,054	3,101
22	1,050	3,117
23	1,059	3,117
24	1,060	3,101
25	1,053	3,119
26	1,052	3,111
27	1,062	3,099
28	1,053	3,108
29	1,062	3,117
30	1,061	3,109
31	1,051	3,101
32	1,055	3,097
33	1,062	3,102
34	1,055	3,109
35	1,050	3,094
36	1,057	3,108
37	1,049	3,099
38	1,063	3,099
39	1,052	3,105
40	1,050	3,099
41	1,058	3,111
42	1,049	3,095
43	1,059	3,094
44	1,056	3,106
45	1,049	3,103
46	1,064	3,110
47	1,051	3,101
48	1,046	3,091
49	1,062	3,101
50	1,060	3,103
Average	1,05	3,11
Cmk	2,92	3,79

UPPER WIRE KIND & SIZE

Wire kind: T2IRSAPL

Wire size: 1 mm^2

Nominal Cr. Height:	1,25	3,2	mm
+/-	0,05	0,1	mm


Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,247	3,208
2	1,247	3,204
3	1,252	3,208
4	1,246	3,211
5	1,245	3,208
6	1,255	3,212
7	1,248	3,203
8	1,241	3,203
9	1,248	3,220
10	1,257	3,202
11	1,244	3,217
12	1,252	3,211
13	1,242	3,208
14	1,252	3,214
15	1,254	3,218
16	1,244	3,211
17	1,249	3,207
18	1,251	3,218
19	1,240	3,210
20	1,251	3,211
21	1,247	3,218
22	1,246	3,212
23	1,241	3,218
24	1,242	3,207
25	1,248	3,210
26	1,255	3,207
27	1,245	3,204
28	1,254	3,210
29	1,249	3,217
30	1,237	3,220
31	1,251	3,211
32	1,238	3,224
33	1,253	3,212
34	1,239	3,221
35	1,248	3,218
36	1,247	3,220
37	1,236	3,206
38	1,238	3,220
39	1,243	3,219
40	1,259	3,209
41	1,244	3,218
42	1,249	3,214
43	1,259	3,204
44	1,261	3,217
45	1,245	3,219
46	1,261	3,206
47	1,255	3,219
48	1,260	3,218
49	1,257	3,226
50	1,250	3,207
Average	1,25	3,21
Cmk	2,47	4,74

Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-4932	TERMINAL No. 端子品番	7116-5712 DD
共通品番	– / –	– / –	– / –

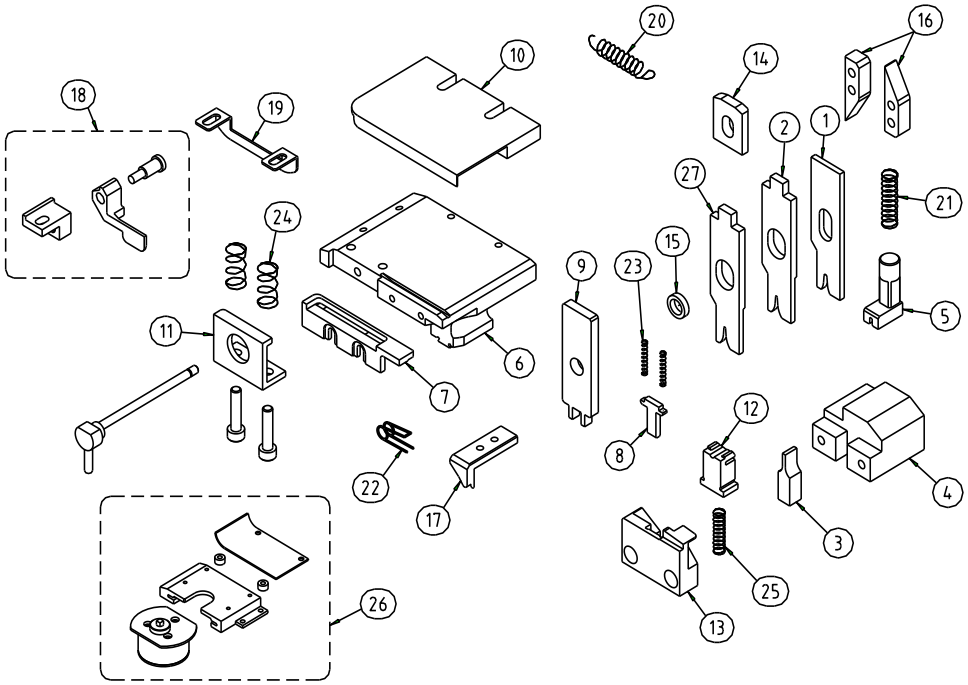

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-5712XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	-001	FEEDING CLAW 送り爪
2	7116-5712XID		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	-005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7116-5712XAD		ANVIL アンビル	19	48A19047	-001	TERMINAL SCRAPER 端子掻き落とし
4	7116-5712XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7116-5712XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7116-5712XYB		BASE ベース	22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
7	7116-5712XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	-002	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	-003	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャーブレードスプリング
10	48A47020	-A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ		7116-5712XKP		BRACKET ブラケット
12	48A19049	-001	SHEARBLADE シャーブレード	27	~~7116-5712XQ~~		~~STABILIZER CRIMPER~~ ~~スタビライザークリンパー~~
13	48A47025	-002	OUTER SHEARBLADE アウターシャーブレード	〈OPTION オプション〉			
14	48A19007	-020	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	-101	OUTER SHEARBLADE アウターシャーブレード
15	48A19019	-025	BUSH ブッシュ	14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	-001	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署		ISSUED 発行
					YWTC		
					DESIGNED DATE 設計日		
					27-10-2009		
					APPROVED 承認	DESIGNED 設計	
					T,Maki	C.Almeida	
					27-10-2009	27-10-2009	