PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2405E019

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7116-5078 * SEQUENCE Nº 9

Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-5078-06	*	**MXS**	**YSD 4514078965**	**DAIMLER**

Applicable Terminals for this Tool:

7116-5078-06			

Anvil			Wire Crimper			Insulation Crimper		
7116-5078XA		(N)	7116-5078XW		(1)	7116-5078XI		(1)
CW (c)	1,84	*CW (i)* 1,75	*CW*	1,78		*CW*	1,75	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	O	0.00~0.20mm 0.20~0.60mm	0 0.37		The Bell Mouth is within the spec.**(*)**	O
	Not found any Bell Mouth in the insulation area.	O	0.00~0.50mm	0.11		The dimension of the cutting carrier is within the spec.**(*)**	O
	The lance height and shape are not deformed.	O	2.5 0º	0.6 --		Bend up and Bend down are within the criteria**(*)**	O
	Not found any burr in the cutting carrier.	O	0.10~1.00mm	0.52		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	3º	0.7		The terminal is not bent sideway, look-king from the top**(*)**	O
	The wire barrel is free from major burrs.	O	1.5º	0.4		The body of the terminal is not twisted**(*)**	O


O - ok **X** - ng **NA** - not aplicable


(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES

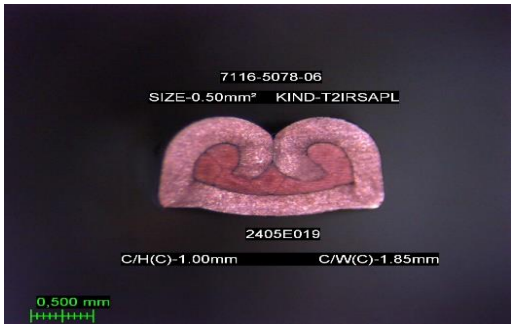

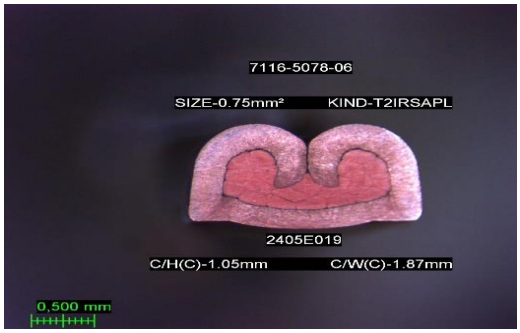

3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1	1,00	7,57
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1,05	1,05	5,14
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm²
SIZE-0.50mm² C/W(I)-1.90mm
SIZE-1.00mm² C/W(I)-1.93mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2024/jun/21	Date: 2024/jun/18	Date: 2024/jun/17

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2405E019

LOWER WIRE KIND & SIZE

Wire kind: T2IRSAPL

Wire size: 0,5 mm²

Nominal Cr. Height:	1	1,75	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,000	1,754
2	1,003	1,754
3	1,000	1,755
4	1,004	1,751
5	0,999	1,748
6	1,003	1,756
7	0,998	1,746
8	1,001	1,748
9	1,004	1,751
10	1,003	1,755
11	1,000	1,754
12	1,000	1,755
13	1,003	1,754
14	0,999	1,747
15	1,001	1,751
16	1,004	1,748
17	1,003	1,755
18	1,000	1,754
19	1,003	1,754
20	1,000	1,751
21	0,998	1,746
22	1,000	1,748
23	0,997	1,755
24	0,999	1,754
25	0,998	1,746
26	1,001	1,751
27	0,999	1,754
28	1,000	1,748
29	0,999	1,754
30	0,997	1,755
31	1,001	1,751
32	1,004	1,748
33	1,003	1,755
34	1,000	1,746
35	1,004	1,747
36	0,997	1,748
37	1,003	1,755
38	1,001	1,754
39	0,998	1,755
40	1,003	1,751
41	1,000	1,754
42	0,999	1,755
43	1,004	1,754
44	1,000	1,746
45	0,999	1,748
46	1,001	1,755
47	1,004	1,754
48	0,998	1,748
49	0,999	1,746
50	1,000	1,755
Average	1,00	1,75
Cmk	7,57	9,52

UPPER WIRE KIND & SIZE

Wire kind: T2IRSAPL

Wire size: 0,75 mm²

Nominal Cr. Height:	1,05	1,95	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,053	1,949
2	1,053	1,958
3	1,055	1,953
4	1,053	1,949
5	1,048	1,958
6	1,055	1,949
7	1,047	1,950
8	1,055	1,949
9	1,047	1,958
10	1,055	1,954
11	1,048	1,949
12	1,054	1,949
13	1,054	1,958
14	1,055	1,950
15	1,054	1,949
16	1,054	1,958
17	1,048	1,949
18	1,055	1,954
19	1,054	1,949
20	1,048	1,958
21	1,055	1,950
22	1,054	1,950
23	1,048	1,955
24	1,055	1,950
25	1,054	1,950
26	1,055	1,954
27	1,054	1,955
28	1,054	1,958
29	1,055	1,950
30	1,047	1,950
31	1,055	1,955
32	1,054	1,958
33	1,048	1,955
34	1,054	1,950
35	1,055	1,958
36	1,047	1,953
37	1,054	1,950
38	1,055	1,955
39	1,055	1,956
40	1,054	1,958
41	1,048	1,955
42	1,054	1,954
43	1,055	1,950
44	1,047	1,958
45	1,048	1,955
46	1,055	1,950
47	1,055	1,956
48	1,054	1,955
49	1,055	1,950
50	1,054	1,958
Average	1,05	1,95
Cmk	5,14	9,12


Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-4289	TERMINAL No. 端子品番	7116-5078

Common PN 共通品番	–	–	–	–
	–	–		

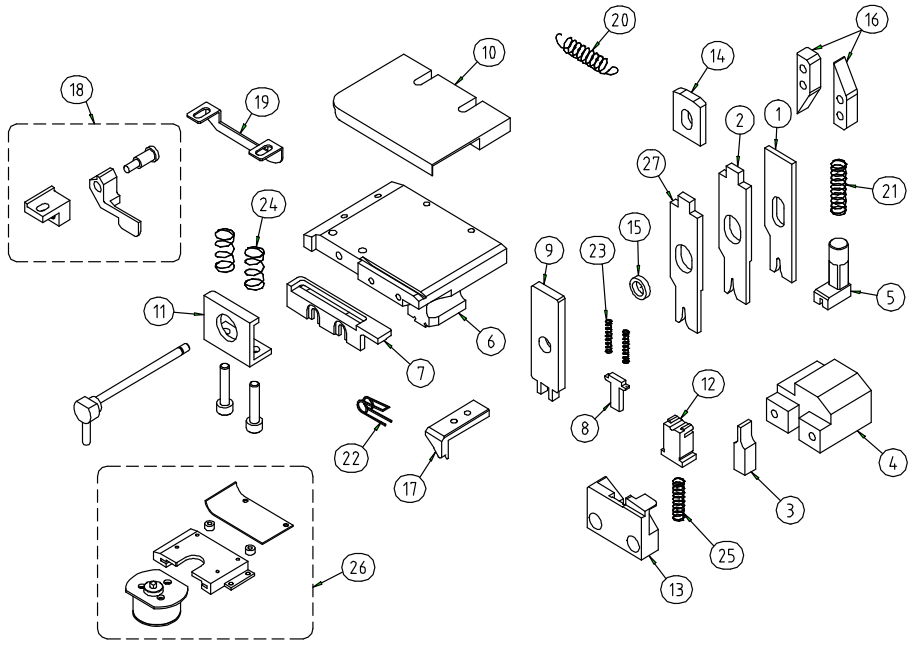

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-5078XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-5078XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7116-5078XA		ANVIL アンビル	19	48A19047	002	TERMINAL SCRAPER 端子掻き落とし
4	7116-5078XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7116-5078XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7116-5078XYB		BASE ベース	22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
7	7116-5078XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャープレードスプリング
10	48A47020	A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	7116-5078XYJ		TERMINAL HOLDER ターミナル押さえ		7116-5078XKP		BRACKET ブラケット
12	48A47024	002 ①	SHEARBLADE シャープレード	27			~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	002 ①	OUTER SHEARBLADE アウターシャープレード	〈OPTION オプション〉			
14	48A19007	025 ②	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	101	OUTER SHEARBLADE アウターシャープレード
15	48A19019	016	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	003	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	
					HIB	
					DESIGNED DATE 設計日	
					2007/8/8	
②	2007/10/10	027→025	QX7	T,Suzuki	APPROVED 承認	DESIGNED 設計
①	2007/9/25	001→002	QX7	T,Suzuki	T,Maki	T,Suzuki
MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	2007/8/8	2007/8/8

ISSUED 発行

ISSUE
2013 / 08 / 09
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.