PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2405E020

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7116-5078 * SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-5078-06	*	**MYS**	**YSD 4514078965**	**DAIMLER**

Applicable Terminals for this Tool:

7116-5078-06							

Anvil			Wire Crimper			Insulation Crimper		
7116-5078XA		(N)	7116-5078XW		(1)	7116-5078XI		(1)
CW (c)	1,84	*CW (i)* 1,75	*CW*	1,78		*CW*	1,75	


1 - VISUAL / MEASURED CHECK ITEMS


			Spec. (*)	Value (**)			
							O - ok X - ng NA - not aplicable
	The two sides of the insulation grips are in the correct position.	O	0.00~0.20mm 0.20~0.60mm	0 0.32		The Bell Mouth is within the spec.(*)	O
	Not found any Bell Mouth in the insulation area.	O	0.00~0.50mm	0.12		The dimension of the cutting carrier is within the spec.(*)	O
	The lance height and shape are not deformed.	O	2.5 0º	0.8 --		Bend up and Bend down are within the criteria(*)	O
	Not found any burr in the cutting carrier.	O	0.10~1.00mm	0.56		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	3º	0.6		The terminal is not bent sideway, look-king from the top(*)	O
	The wire barrel is free from major burrs.	O	1.5º	0.2		The body of the terminal is not twisted(*)	O

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

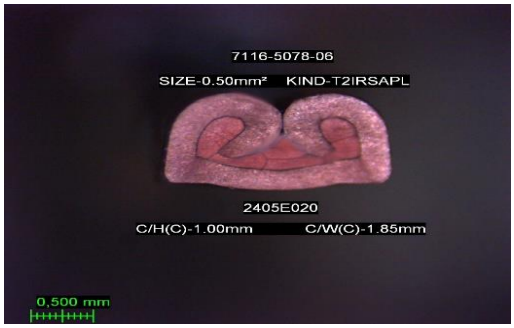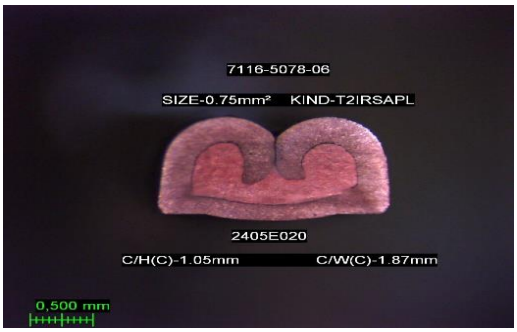2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1	1,00	6,09
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	1,05	1,05	6,57
	+/-0.05		

REMARKS:

Aplicable wire range 0.50mm²~1.00mm²
SIZE-0.50mm² C/W(I)-1.90mm
SIZE-1.00mm² C/W(I)-1.94mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 18388
Date: 2024/jul/08	Date: 2024/jun/25	Date: 2024/jun/25

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2405E020

LOWER WIRE KIND & SIZE

Wire kind: T2IRSAPL

Wire size: 0,5 mm^2

Nominal Cr. Height:	1	1,75	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,003	1,753
2	0,998	1,755
3	1,002	1,753
4	1,004	1,755
5	1,005	1,751
6	0,997	1,748
7	1,004	1,751
8	1,003	1,753
9	0,999	1,755
10	1,004	1,748
11	0,998	1,757
12	1,002	1,751
13	1,002	1,755
14	1,004	1,753
15	0,996	1,753
16	1,002	1,753
17	1,002	1,755
18	0,999	1,751
19	1,002	1,755
20	1,003	1,748
21	1,002	1,755
22	0,998	1,753
23	1,002	1,751
24	0,997	1,753
25	1,003	1,753
26	0,996	1,748
27	1,000	1,757
28	1,002	1,753
29	1,004	1,753
30	1,003	1,757
31	1,002	1,757
32	0,998	1,748
33	1,002	1,751
34	1,002	1,753
35	0,999	1,757
36	1,004	1,755
37	0,996	1,753
38	1,005	1,753
39	0,998	1,748
40	0,997	1,757
41	1,002	1,753
42	1,000	1,748
43	1,004	1,753
44	1,003	1,751
45	0,998	1,755
46	1,002	1,748
47	1,004	1,753
48	1,002	1,757
49	1,005	1,755
50	1,000	1,753
Average	1,00	1,75
Cmk	6,09	11,64

UPPER WIRE KIND & SIZE

Wire kind: T2IRSAPL

Wire size: 0,75 mm^2

Nominal Cr. Height:	1,05	1,95	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,052	1,950
2	1,051	1,951
3	1,048	1,955
4	1,049	1,949
5	1,054	1,955
6	1,050	1,957
7	1,052	1,947
8	1,049	1,950
9	1,046	1,948
10	1,052	1,951
11	1,055	1,957
12	1,047	1,947
13	1,047	1,950
14	1,052	1,957
15	1,048	1,955
16	1,046	1,948
17	1,050	1,951
18	1,055	1,950
19	1,052	1,955
20	1,047	1,947
21	1,051	1,957
22	1,055	1,950
23	1,052	1,948
24	1,050	1,950
25	1,046	1,950
26	1,052	1,951
27	1,048	1,955
28	1,050	1,950
29	1,052	1,947
30	1,052	1,949
31	1,048	1,950
32	1,051	1,948
33	1,052	1,950
34	1,050	1,957
35	1,047	1,949
36	1,055	1,950
37	1,051	1,947
38	1,052	1,955
39	1,048	1,950
40	1,052	1,950
41	1,051	1,947
42	1,046	1,951
43	1,052	1,955
44	1,050	1,950
45	1,050	1,949
46	1,047	1,951
47	1,052	1,955
48	1,048	1,950
49	1,050	1,957
50	1,052	1,951
Average	1,05	1,95
Cmk	6,57	10,26


Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-4289	TERMINAL No. 端子品番	7116-5078

Common PN 共通品番	–	–	–	–
	–	–		

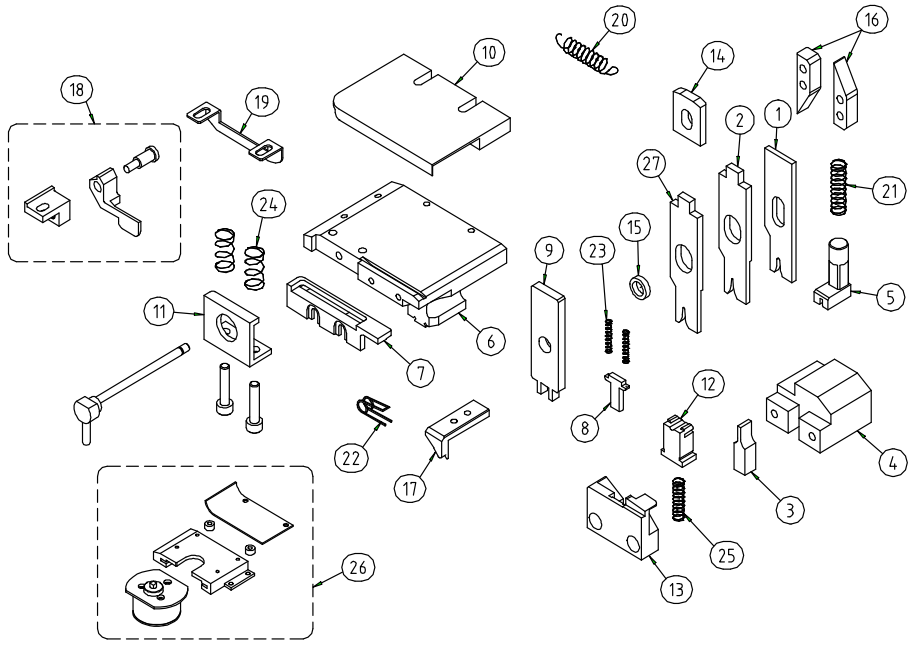

No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-5078XW		WIRE CRIMPER ワイヤークリンパー	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-5078XI		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7116-5078XA		ANVIL アンビル	19	48A19047	002	TERMINAL SCRAPER 端子掻き落とし
4	7116-5078XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7116-5078XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7116-5078XYB		BASE ベース	22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
7	7116-5078XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	001	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャープレードスプリング
10	48A47020	A04	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	7116-5078XYJ		TERMINAL HOLDER ターミナル押さえ		7116-5078XKP		BRACKET ブラケット
12	48A47024	002 ①	SHEARBLADE シャープレード	27			~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	002 ①	OUTER SHEARBLADE アウターシャープレード	〈OPTION オプション〉			
14	48A19007	025 ②	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	101	OUTER SHEARBLADE アウターシャープレード
15	48A19019	016	BUSH ブッシュ	14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	003	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPRICATION POST 申請部署	
					HIB	
					DESIGNED DATE 設計日	
					2007/8/8	
②	2007/10/10	027→025	QX7	T,Suzuki	APPROVED 承認	DESIGNED 設計
①	2007/9/25	001→002	QX7	T,Suzuki	T,Maki	T,Suzuki
MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	2007/8/8	2007/8/8

ISSUED 発行

ISSUE
2013 / 08 / 09
YAZAKI PARTS CO.,LTD. HIB MACHINE PRODUCT DEP.