PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2405E021

TOOLS MANAGEMENT INFORMATION ---> ***TOOL Nº 7116-1282 **** ***SEQUENCE Nº*** 9







Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7116-1282	*****	**MXSR**	**YSD-4514155672**	**MEL TRUCK BEV**

Applicable Terminals for this Tool:

7116-1282				

Anvil			Wire Crimper			Insulation Crimper		
7116-1282XA		(N)	7116-1282XWW		(1)	7116-1282XIW		(3)
CW (c)	2,29	*CW (i)* 2,59	*CW*	2,29		*CW*	2,59	

1 - VISUAL / MEASURED CHECK ITEMS

			Spec. (*)	Value (**)			
	The two sides of the insulation grips are in the correct position.	**O**	0~0.40mm 0.15~0.65mm	0.19 0.39		The Bell Mouth is within the spec.**(*)**	**O**
	Not found any Bell Mouth in the insulation area.	**O**	0~0.30mm	0.22		The dimension of the cutting carrier is within the spec.**(*)**	**O**
	The lance height and shape are not deformed.	**O**	3º 3º	- 0.4		Bend up and Bend down are within the criteria**(*)**	**O**
	Not found any burr in the cutting carrier.	**O**	0~1.50mm	1.06		The exposed conductor is within the spec.(*)	**O**
	Not found any crack in the terminal.	**O**	5º	0.6		The terminal is not bent sideway, look-king from the top**(*)**	**O**
	The wire barrel is free from major burrs.	**O**	3º	0.2		The body of the terminal is not twisted**(*)**	**O**

(*) - Specified on Crimping Spec.

(**) - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES



3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk
mm	1,4	1,41	2,50
	+/-0.05		

	NOMINAL	AVERAGE	Cmk
mm	NA		
	+/-NA		

REMARKS:

Aplicable wire range 0.50mm~1.25mm².
The wire size 0.50mm²/0.75mm is not recommended due to crimping microcut conditions.
Section 0.85mm² is not prepared due the miss wire samples.

EVALUATION DECISION

SUITABLE **X**
NOT SUITABLE

FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2025/fev/12	Date: 2025/jan/28	Date: 2025/jan/27

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2405E021

LOWER WIRE KIND & SIZE

Wire kind:	CIVUS		
Wire size:	1,25		mm^2
Nominal Cr. Height:	1,4	3,8	mm
+/-	0,05	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,410	3,802
2	1,419	3,799
3	1,402	3,799
4	1,409	3,797
5	1,405	3,806
6	1,405	3,810
7	1,403	3,822
8	1,412	3,812
9	1,409	3,804
10	1,415	3,816
11	1,404	3,818
12	1,416	3,798
13	1,410	3,821
14	1,400	3,798
15	1,404	3,815
16	1,400	3,821
17	1,409	3,799
18	1,413	3,811
19	1,417	3,807
20	1,415	3,812
21	1,413	3,811
22	1,400	3,816
23	1,401	3,815
24	1,401	3,807
25	1,412	3,812
26	1,412	3,816
27	1,408	3,812
28	1,403	3,809
29	1,407	3,821
30	1,404	3,810
31	1,410	3,814
32	1,416	3,812
33	1,402	3,803
34	1,407	3,813
35	1,412	3,822
36	1,413	3,803
37	1,404	3,820
38	1,414	3,801
39	1,408	3,821
40	1,408	3,805
41	1,410	3,809
42	1,408	3,821
43	1,399	3,798
44	1,405	3,798
45	1,419	3,803
46	1,403	3,816
47	1,404	3,824
48	1,404	3,798
49	1,416	3,823
50	1,416	3,815
Average	1,41	3,81
Cmk	2,50	3,63

UPPER WIRE KIND & SIZE

Wire kind:	NA	+	NA	
Wire size:	NA	+	NA	mm^2
Nominal Cr. Height:	NA		NA	mm
+/-	NA		NA	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
Average		
Cmk		

Acceptance criteria: Cmk>= 2,0

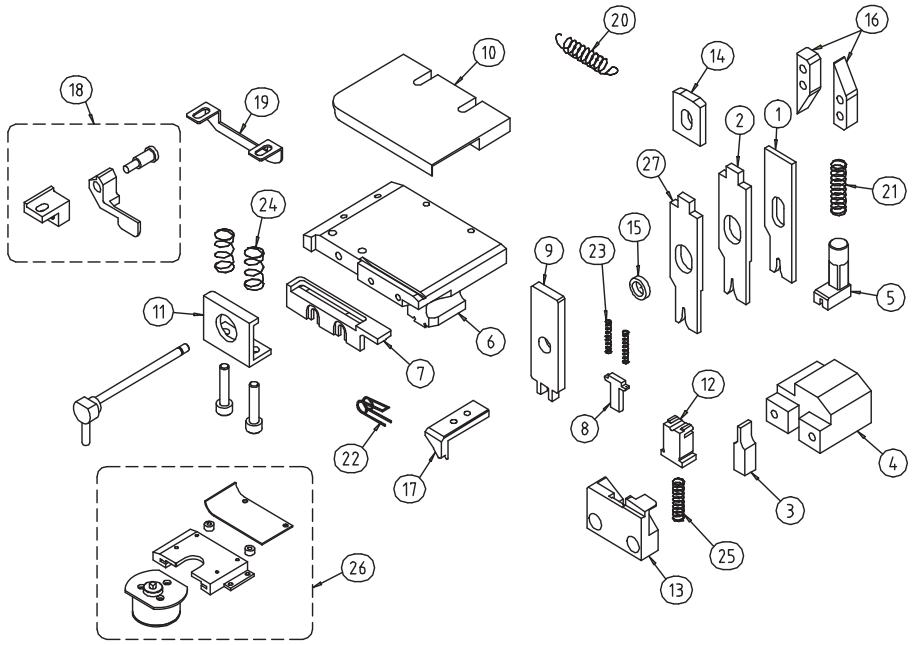
END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-0363	TERMINAL No. 端子品番	7116-1282

Common PN 共通品番	7116-1289	–	–	–
	–	–		

Rev.1



No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称	No,	PARTS No, 部品番号	DRW No, 図番	PARTS NAME 部品名称
1	7116-1282XWW ⑤		WIRE CRIMPER ワイヤークリンパー	17	48A47013	001	FEEDING CLAW 送り爪
2	7116-1282XIW ④		INSULATION CRIMPER インシュレーションクリンパー	18	48A19100	005	WIRE STOPPER Assy 電線ストッパー アッシー
3	7116-1282XA		ANVIL アンビル	19	48A19047	002	TERMINAL SCRAPER 端子掻き落とし
4	7116-1282XJE		ANVIL HOLDER アンビルホルダー	20	48A47031		RETURN SPRING 戻しスプリング
5	7116-1282XYY		SUPPORTING STOPPER サポーティングストッパー	21	48A47032	001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
6	7116-1282XYB		BASE ベース	22	48A19017	003	FEEDING CLAW SPRING 送り爪スプリング
7	7116-1282XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB	23	48A19023	002	WIRE HOLDER SPRING 電線押さえスプリング
8	48A47016	003	WIRE HOLDER 電線押さえ	24	48A19074		TERMINAL HOLDER SPRING ターミナル押さえスプリング
9	48A47017	004 ②	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー	25	48A19050		SHEARBLADE SPRING シャープレードスプリング
10	48A47020	A05	TERMINAL GUIDE PLATE A ターミナルガイドプレートA	26	48A19999		TERMINAL OIL UNIT ターミナル塗油ユニット
11	48A47022	001	TERMINAL HOLDER ターミナル押さえ		7116-1281XKP		BRACKET ブラケット
12	48A47024	001	SHEARBLADE シャープレード	27			~~STABILIZER CRIMPER スタビライザークリンパー~~
13	48A47025	001	OUTER SHEARBLADE アウターシャープレード	〈OPTION オプション〉			
14	48A19007	012	INSULATION ADJUSTING PIECE インシュレーション調整コマ	13	48A47025	101	OUTER SHEARBLADE アウターシャープレード
15	48A19019	017 ③	BUSH ブッシュ	14	48A47042	-002	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)
16	48A47014	005 ①	FEEDING CAM 送りカム				

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検	APPROVED 承認	DESIGNED 設計
⑤	2024/5/14	XW→XWW	C24E036	S.KAWAMORI		
④	2011/12/15	XI→XIW	11L-061	Y.NOZAWA		
③	2010/6/2	019→017	10E-044	Y.YAGI		
②	2008/1/16	003→004	QX7	T,Suzuki		
①	2007/8/23	001→005	QX7	T,Suzuki	K,Hiraguchi	T,Suzuki
					2007/7/18	2007/7/18

APPRICATION POST 申請部署: HIB

DESIGNED DATE 設計日: 2007/7/18

REVISED

ISSUED 発行

ISSUE
2024/06/05
YAZAKI PARTS CO.LTD HAIBARA OFFICE