PTC - Avenida D. Manuel I
Zona Industrial de Ovar
3880-109 OVAR

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

(Spec. YEL-RP-02-0004)

Applicator Serial Nº
2405E023

TOOLS MANAGEMENT INFORMATION ---> TOOL Nº 7112-5198 Y1 SEQUENCE Nº 9









Validation Terminal Nº	Accessory	Applicator Type	Purchasing Order Nº	Project / Model
7112-5198-08	*	**MXK**	**YSD 4514078965**	**DAIMLER**

Applicable Terminals for this Tool:

7112-5198-08			

Anvil		Wire Crimper		Insulation Crimper	
7112-5198-00XA	(N)	7112-5198-00XW	(N)	7112-5198-00XI	(N)
CW (c) 1,42	*CW (i)* 2,03	*CW* 1,40		*CW* 2,03	

1 - VISUAL / MEASURED CHECK ITEMS

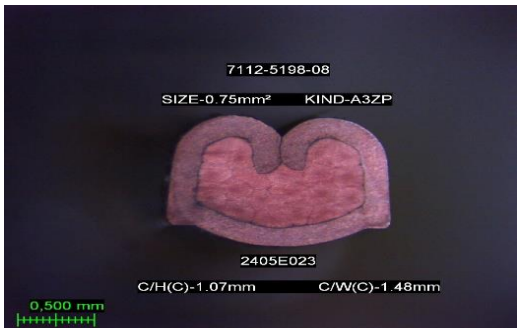
			Spec. (*)	Value (**)	O - ok X - ng NA - not aplicable		
	The two sides of the insulation grips are in the correct position.	O	0.00~0.20mm 0.10~0.40mm	0 0.29		The Bell Mouth is within the spec.(*)	O
	Not found any Bell Mouth in the insulation area.	O	0.00~0.30mm	0.09		The dimension of the cutting carrier is within the spec.(*)	O
	The lance height and shape are not deformed.	O	0.00~0.25mm 0.00~0.25mm	0.10 --		Bend up and Bend down are within the criteria(*)	O
	Not found any burr in the cutting carrier.	O	0.10~0.70mm	0.59		The exposed conductor is within the spec.(*)	O
	Not found any crack in the terminal.	O	5º	0.7		The terminal is not bent sideway, look-king from the top(*)	O
	The wire barrel is free from major burrs.	O	3º	0.5		The body of the terminal is not twisted(*)	O

(*) - Specified on Crimping Spec. **(**)** - Measured Value(From Lower Wire Kind&Size Sample)

LOWER WIRE KIND & SIZE	**UPPER** WIRE KIND & SIZE

2 - MICRO CUT SAMPLES





3 - CRIMPING HEIGHT STABILITY

	NOMINAL	AVERAGE	Cmk		NOMINAL	AVERAGE	Cmk
mm	0,93	0,93	5,78	mm	1,07	1,07	5,55
	+/-0.03				**+/-0.03**		

REMARKS:

Aplicable wire range 0.50mm²~0.75mm²
SIZE-0.50mm² C/W(I)-2.04mm
SIZE-0.75mm² C/W(I)-2.11mm

EVALUATION DECISION

SUITABLE [X]
NOT SUITABLE [ ]
FOR USE IN PRODUCTION

APPROVED (Section Chief) 3485	CHECKED (Operator) 44	PREPARED (Operator) nº 5061
Date: 2024/jul/08	Date: 2024/jul/08	Date: 2024/jul/04

YAZAKI
PORTO TECHNICAL CENTRE

APPLICATOR VALIDATION REPORT

Applicator Serial Nº
2405E023

LOWER WIRE KIND & SIZE

Wire kind: T2IRSAPL

Wire size: 0,5 mm^2

Nominal Cr. Height:	0,93	1,7	mm
+/-	0,03	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	0,929	1,702
2	0,933	1,706
3	0,930	1,709
4	0,929	1,699
5	0,932	1,702
6	0,930	1,707
7	0,929	1,702
8	0,929	1,699
9	0,932	1,706
10	0,933	1,702
11	0,929	1,705
12	0,929	1,709
13	0,928	1,699
14	0,933	1,702
15	0,932	1,702
16	0,929	1,702
17	0,929	1,707
18	0,929	1,702
19	0,933	1,706
20	0,929	1,699
21	0,928	1,707
22	0,930	1,702
23	0,932	1,705
24	0,929	1,709
25	0,932	1,699
26	0,929	1,702
27	0,933	1,702
28	0,929	1,706
29	0,929	1,699
30	0,933	1,707
31	0,929	1,702
32	0,929	1,705
33	0,929	1,709
34	0,929	1,702
35	0,928	1,699
36	0,930	1,702
37	0,929	1,709
38	0,933	1,707
39	0,929	1,705
40	0,930	1,702
41	0,932	1,699
42	0,929	1,702
43	0,933	1,707
44	0,929	1,702
45	0,929	1,709
46	0,930	1,707
47	0,929	1,702
48	0,928	1,709
49	0,929	1,699
50	0,933	1,702
Average	0,93	1,70
Cmk	5,78	9,54

UPPER WIRE KIND & SIZE

Wire kind: A3ZP

Wire size: 0,75 mm^2

Nominal Cr. Height:	1,07	2,05	mm
+/-	0,03	0,1	mm

Sample number	Crimp height WIRE (mm)	Crimp height INSULATION (mm)
1	1,071	2,050
2	1,073	2,053
3	1,073	2,057
4	1,072	2,049
5	1,070	2,053
6	1,073	2,047
7	1,070	2,054
8	1,073	2,057
9	1,070	2,053
10	1,073	2,049
11	1,070	2,053
12	1,073	2,057
13	1,068	2,050
14	1,070	2,054
15	1,071	2,057
16	1,073	2,053
17	1,068	2,055
18	1,071	2,049
19	1,073	2,057
20	1,070	2,057
21	1,073	2,053
22	1,073	2,047
23	1,071	2,057
24	1,071	2,055
25	1,073	2,057
26	1,069	2,054
27	1,073	2,057
28	1,072	2,049
29	1,070	2,053
30	1,069	2,054
31	1,073	2,055
32	1,070	2,057
33	1,073	2,054
34	1,073	2,053
35	1,071	2,055
36	1,068	2,049
37	1,073	2,053
38	1,073	2,053
39	1,069	2,053
40	1,073	2,054
41	1,071	2,047
42	1,073	2,057
43	1,068	2,047
44	1,073	2,049
45	1,070	2,055
46	1,069	2,053
47	1,072	2,050
48	1,071	2,049
49	1,070	2,047
50	1,069	2,053
Average	1,07	2,05
Cmk	5,55	9,94

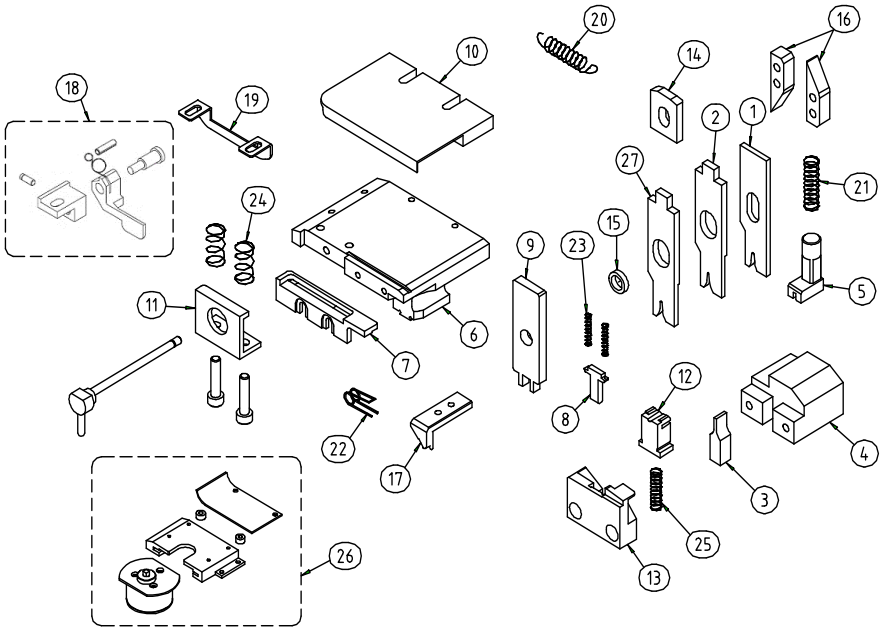
Acceptance criteria: Cmk>= 2,0

END

04 APPLICATOR CONSUMABLE PARTS LIST ／ 04 アプリケーター 消耗部品表

PRODUCT No. 製品番号	C0100-8317	TERMINAL No. 端子品番	7112-5198 Y1
共通品番	– – – – / – – – –		

Rev.0



No,	PARTS No, 部品番号		PARTS NAME 部品名称
1	7112-5198-00XW		WIRE CRIMPER ワイヤークリンパー
2	7112-5198-00XI		INSULATION CRIMPER インシュレーションクリンパー
3	7112-5198-00XA		ANVIL アンビル
4	7112-5198XJE		ANVIL HOLDER アンビルホルダー
5	7112-5198XYY		SUPPORTING STOPPER サポーティングストッパー
6	7112-5198XYB		BASE ベース
7	7112-5198XYH		TERMINAL GUIDE PLATE B ターミナルガイドプレートB
8	48A47016	-001	WIRE HOLDER 電線押さえ
9	48A47017	-002	CUTTING PUNCH & WIRE HOLDER 切断ポンチ兼電線押さえホルダー
10	48A47020	A05	TERMINAL GUIDE PLATE A ターミナルガイドプレートA
11	48A47022	-001	TERMINAL HOLDER ターミナル押さえ
12	48A47024	-001	SHEARBLADE シャープレード
13	48A47025	-001	OUTER SHEARBLADE アウターシャープレード
14	48A19007	-022	INSULATION ADJUSTING PIECE インシュレーション調整コマ
15	48A19019	-012	BUSH ブッシュ
16	48A47014	-003	FEEDING CAM 送りカム

No,	PARTS No, 部品番号		PARTS NAME 部品名称
17	48A47013		FEEDING CLAW 送り爪
18	48A19100	-011	WIRE STOPPER Assy 電線ストッパー アッシー
19	48A19047	-002	TERMINAL SCRAPER 端子掻き落とし
20	48A47031		RETURN SPRING 戻しスプリング
21	48A47032	-001	SUPPORTING STOPPER SPRING サポーティングストッパースプリング
22	48A19017	-003	FEEDING CLAW SPRING 送り爪スプリング
23	48A19023	-002	WIRE HOLDER SPRING 電線押さえスプリング
24	48A19074	-001	TERMINAL HOLDER SPRING ターミナル押さえスプリング
25	48A19050		SHEARBLADE SPRING シャープレードスプリング
26	48A47999		TERMINAL OIL UNIT ターミナル塗油ユニット
	7112-5198XKP		BRACKET ブラケット
27	-		~~STABILIZER CRIMPER スタビライザークリンパー~~
28	~~48A47047~~		~~Conductor holder Spring 芯線押えスプリング~~
〈OPTION オプション〉			
13	48A47025	-101	OUTER SHEARBLADE アウターシャープレード
14	48A47042	-001	INSULATION ADJUSTING PIECE(MECAL) インシュレーション調整コマ(メカル)

MARK 記号	DATE 日付	REVISION RECORD 改訂記録	No. 番号	CHECKED 点検
–	–	–	–	–

APPRICATION POST 申請部署	
PTC	
DESIGNED DATE 設計日	
03/05/2024	
APPROVED 承認	DESIGNED 設計
S.Junior	C.F.Almeida
03/05/2024	03/05/2024

ISSUED 発行