

Supplementary Material:

Exact Radial-Determinant Frequencies of a Piezoelectric Annular Plate, and Inverse Recovery of e_{31} from Open-Circuit Flexure

Garrek McCune^{a,*}, Daniel Stutts^a

^a*Mechanical and Aerospace Engineering,*

Missouri University of Science and Technology, Rolla, MO 65409, USA

*Corresponding author. E-mail: ghmkfh@umsystem.edu

DRAFT — September 24, 2026

Main text contains no job numbers; they are listed in §S.6.

S.1 Cubic consistency condition

Each layer carries $\varphi = \pm \bar{\varphi}f(s)$, $s = |z| - h \in [0, h_1]$, with $f(0) = f(h_1) = 0$ (mirrored so that the two layers' moments add). The thickness-integrated electric enthalpy of one layer is $-\bar{e}_{31}I_1\bar{\varphi}\nabla^2w - \frac{1}{2}\bar{\Xi}_{33}I_2\bar{\varphi}^2 - \frac{1}{2}\bar{\Xi}_{11}I_3|\nabla\bar{\varphi}|^2$ plus the elastic part, with $I_1 = \int z f' dz = -\int f ds$, $I_2 = \int f'^2 ds$, $I_3 = \int f^2 ds$. Stationarity in w and $\bar{\varphi}$ gives the flexural equation with piezo moment coefficient $K = -2\bar{e}_{31}I_1$ (two layers) and the electrical equation $\bar{\Xi}_{11}I_3\Delta\bar{\varphi} - \bar{\Xi}_{33}I_2\bar{\varphi} - \bar{e}_{31}I_1\Delta w = 0$; the insulated edge $\partial\bar{\varphi}/\partial r = 0$ is its natural condition. The long-wave increment per layer is $(\bar{e}_{31}I_1)^2/(\bar{\Xi}_{33}I_2) \leq h_1^3\bar{e}_{31}^2/(12\bar{\Xi}_{33})$ by Cauchy–Schwarz, with equality only for f' linear in s , i.e. the quadratic bubble $f = 4s(h_1 - s)/h_1^2$ of the main text: $I_1 = -2h_1/3$, $I_2 = 16/(3h_1)$, $I_3 = 8h_1/15$, so $K = \frac{4}{3}h_1\bar{e}_{31}$ and the normalized electrical equation is $a\Delta\bar{\varphi} - \bar{\varphi} + c\Delta w = 0$ with $a = h_1^2\bar{\Xi}_{11}/(10\bar{\Xi}_{33})$, $c = h_1^2\bar{e}_{31}/(8\bar{\Xi}_{33})$. The sine of Duan, Quek and Wang [1] gives $K = (4/\pi)h_1\bar{e}_{31}$; under this projection its long-wave increment is $96/\pi^4$ of exact, and under their thickness-integrated Gauss-law closure ($a = h_1^2\bar{\Xi}_{11}/(\pi^2\bar{\Xi}_{33})$, $c = h_1^2\bar{e}_{31}/(2\pi\bar{\Xi}_{33})$) it is $12/\pi^2$ of exact. The earlier version of this paper used that closure; the solver keeps it as a switch (`projection='duan'`), and it reproduces every earlier number bit-for-bit. Positing $\bar{\varphi} = \chi\bar{w}$ with χ independent of r gives $\lambda = \chi/(a\chi + c)$ from the electrical equation and $(d_1 + d_2)\lambda^2 + K\chi\lambda - A_2\omega^2 = 0$ from the flexural one; eliminating λ gives the cubic $Ka\chi^3 + (d_1 + d_2 + Kc - A_2\omega^2a^2)\chi^2 - 2A_2\omega^2ac\chi - A_2\omega^2c^2 = 0$ (Duan, Quek and Wang's Eq. 17a is the same cubic up to a constant factor, with their coefficients). Each of the three roots (χ_i, λ_i) depends on the trial frequency ω . For each root the radial problem is $\Delta\bar{w} - \lambda_i\bar{w} = 0$, with Bessel pair (J_n, Y_n) or modified pair (I_n, K_n) according to the sign of λ_i . The general short-circuit solution is the sum over all three branches. The limit $\bar{e}_{31} \rightarrow 0$ is singular (leading and two subleading coefficients of the cubic vanish together), so the elastic bilayer is a separate 4×4 .

The open-circuit rank-1 coefficient of the main text,

$$\alpha = \frac{4\bar{e}_{31}^2(h + h_1/2)^2h_1}{\bar{\Xi}_{33}(r_o^2 - r_i^2)}, \quad (\text{S.1})$$

is the unique sign that raises the first free-free $n = 0$ root. It is the product of the moment arm of M_p and the charge arm of Q , both $h + h_1/2$ (the bus charge is $-\partial\mathcal{H}/\partial V$ of the same enthalpy); the earlier outer-face charge arm $h + h_1$ made α too large by $(h + h_1)/(h + h_1/2)$. On a mixed edge the same αS is added only where $M_{rr} = 0$ is imposed (the free edge). Driven Q/V uses the same 4×4 with right-hand side $M_p = 2\bar{e}_{31}(h + h_1/2)V$ on both moment rows. An independent bisection of this Q/V recovers the open-circuit root to 1.4×10^{-15} relative.

S.2 Inverse on-branch cross-check

For the two clamped-clamped short-circuit recoveries, the product $(d\omega/dp)(dp/d\omega)$ on the solution branch is 1.000009 (e_{31}) and 1.000008 (E). Propagated uncertainties at 0.10% frequency precision are ten times the 0.01% values in main-text Table 4: 0.246% of E , 8885% of short-circuit e_{31} , and 21.3% of open-circuit e_{31} at $h_1/2h = 1/12$.

The sequential recovery (main text §6, job 2494216) was run at full production precision (dps=100) on the cluster and reproduces the in-sandbox validation run bit-for-bit. Round trip: $\hat{E} = 2.000000009 \times 10^{11}$ Pa (4.5×10^{-9} relative), then, holding $\hat{E}$, $\hat{e}_{31} = 4.100001626 \text{ C m}^{-2}$ (4.0×10^{-7} relative); both below the 10^{-6} bar. On-branch sensitivities at $h_1/2h = 1/12$: $d\omega_{\text{SC}}/dE = 5.678 \times 10^{-9} \text{ rad s}^{-1} \text{ Pa}^{-1}$, $d\omega_{\text{OC}}/de_{31} = -0.8577 \text{ rad s}^{-1} \text{ m}^2 \text{ C}^{-1}$, $d\omega_{\text{OC}}/dE = 1.518 \times 10^{-9} \text{ rad s}^{-1} \text{ Pa}^{-1}$, giving an implicit $de_{31}/dE|_{\omega_{\text{OC}}} = 1.769 \times 10^{-9} \text{ C m}^{-2} \text{ Pa}^{-1}$. At 0.01% frequency precision this splits the 3.01% total of main-text Table 4 into a 2.133% direct term and a 2.122% term from propagating $\hat{E}$'s own 0.0246% uncertainty; at 0.10% frequency precision the same split gives 21.33% and 21.22%, total 30.09%. The negative control substitutes the clamped-clamped open-circuit root for the free-free one in the second step: $\hat{e}_{31} = 4.100662522 \text{ C m}^{-2}$ still solves (sign flip present), but $d\omega_{\text{SC}}/de_{31}|_{\hat{E}} = -7.664 \times 10^{-3} \text{ rad s}^{-1} \text{ m}^2 \text{ C}^{-1}$ propagates to 888.5% of e_{31} at 0.01% frequency precision – the same order as the single-parameter clamped-clamped figure in main-text Table 4, confirming the control fails as required.

S.3 Finite-element discriminator and mixed electrical boundary

Axisymmetric PLANE223, KEYOPT(1)=1001, millimetre-newton-second-tonne, relative permissivity, one mesh for every electrical condition compared. Mode 1 is the numerical rigid body (≤ 0.003 Hz). Mode 2 is bending: transverse displacement same sign and magnitude at the host top and bottom at $r = r_o$; radial displacement opposite. The ratio of those components is 19.71 (both-faces short-circuit), 19.75 (open-circuit), and 19.72 (outer-only ground). Open-circuit mechanical amplitudes are smaller under unity-normalization because VOLT participates in the norm; the ratio is the identifier.

The outer-only-ground deck (VOLT= 0 on $z = \pm(h + h_1)$, interface free) gives 119.242 Hz. That is 0.36% above true both-faces short-circuit (118.811 Hz) and is not used as the short-circuit baseline in the main text. Coupling-off is 118.810 Hz.

The same fair open-circuit/both-faces-short-circuit pair was cloned, unmeshed, to $h_1/2h = 1/8$ and $1/5$ (job 2494226). At $1/8$: mode 2 is 121.839 Hz open-circuit, 121.348 Hz short-circuit, discriminator ratio 19.77 and 19.70. At $1/5$: mode 2 is 127.809 Hz open-circuit, 127.047 Hz short-circuit, discriminator ratio 19.80 and 19.69. All four runs show mode 1 at 0 Hz (rigid body) and zero MAPDL *** ERROR *** lines in the MAPDL statistics block. The queue script's own automated pass/fail scan reported all four as FAILED; that scan greps each run's transcript for the literal string *** ERROR *** and matched it against that same string appearing inside this deck family's own pre-registration comment, not against an actual MAPDL error line. The raw NUMBER OF ERROR

MESSAGES ENCOUNTERED line in each transcript reads zero, and the run completed (RUN COMPLETED) in every case; the numbers above are read from that completed output, not from the scan's own label.

The same fair pair was then remeshed with the piezo through-thickness division count doubled from 2 to 4, leaving radial divisions, host through-thickness divisions, units, and electrical BC unchanged (job 2494665). Mode 2 frequencies are unchanged at the printed precision: 119.143 vs 118.811 Hz at $1/12$, 121.839 vs 121.348 Hz at $1/8$, 127.809 vs 127.047 Hz at $1/5$. Discriminator ratios remain 19.7–19.8. The 93%/90%/86% recovery of the earlier, non-reciprocal closed-form split was therefore not a through-thickness mesh effect; it is the charge-arm ratio $(h + h_1/2)/(h + h_1) = 0.929/0.900/0.857$. Against the reciprocal closed form the three finite-element splits are 99.9%/99.9%/99.8% of the analytic value.

S.4 Wide-axis admittance

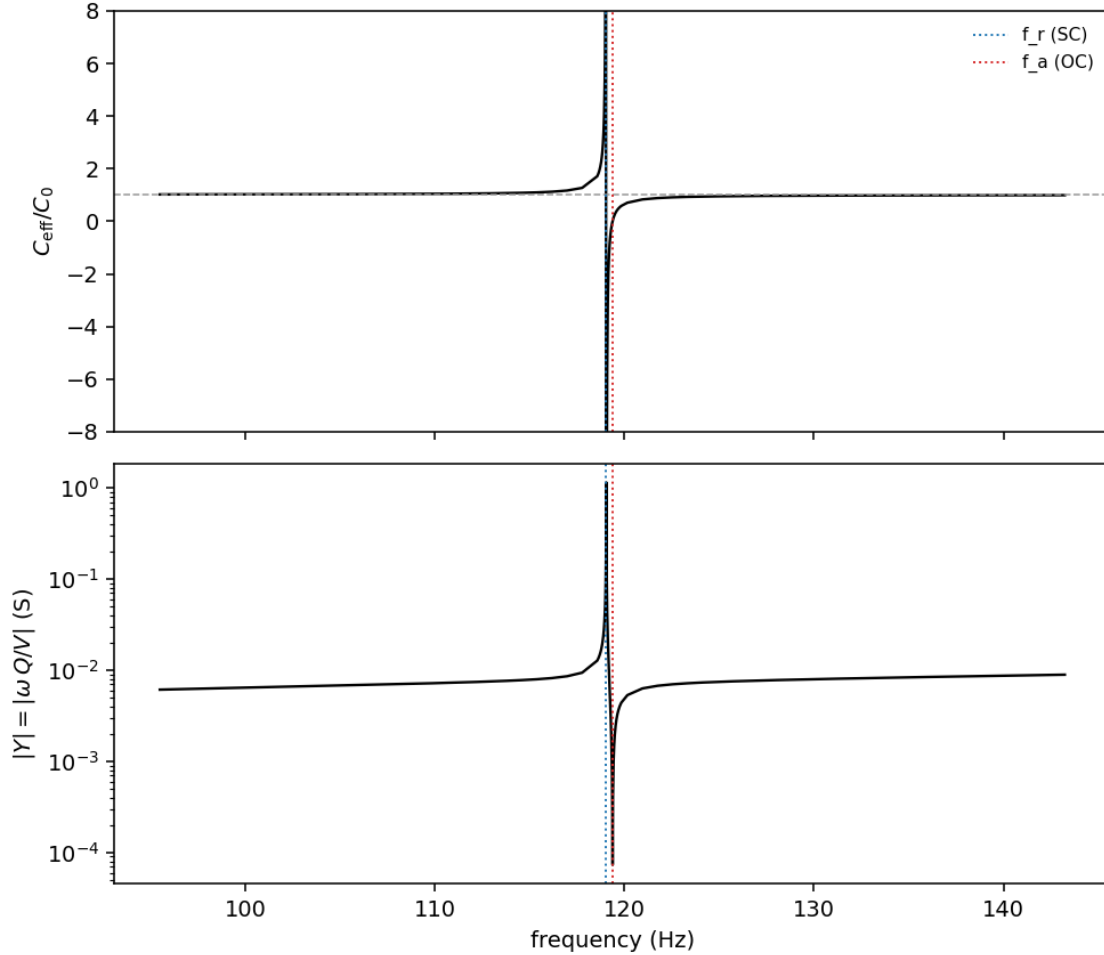


Figure S.1: Driven C_{eff}/C_0 and $|Y|$ on 95–145 Hz at $h_1/2h = 1/12$. The pole and zero of the first $n = 0$ pair differ by 0.28% and overlap on this axis; main-text Fig. 4 zooms 118.6–120 Hz.

A harmonic PLANE223 run on the same mesh (job 2494863; 1 V on the outer-bus master, KEY-OPT(1)=1001 charge reaction) places the $|Y|$ peak at 118.79 Hz and the charge-zero at 119.13 Hz,

against the modal pair 118.811 / 119.143 Hz. An earlier harmonic dump (job 2494669) used the current label **AMPS**, which is **KEYOPT(1)=101**, and returned a numerical-zero bus current at every frequency; that run is not a disproof of the pole/zero.

S.5 Thickness-ratio sweep and other-ratio admittance

Figure S.2 is the closed-form $h_1/2h$ sweep that sits underneath main-text Table 2 and Fig. 2: eleven ratios from $1/40$ to $1/4$, linear-potential open-circuit 4×4 against the elastic bilayer. The three Duan Table 4 ratios (red) lie on the curve. The thin-layer intercept $\Delta_{\text{OC}}/(h_1/2h) \rightarrow 0.035$ is the leading h_1 scaling of the rank-1 coefficient α (the same limit under either charge arm, since $h_1 \rightarrow 0$). The bottom panel is the single-parameter e_{31} G2 at 0.01% frequency precision (host E known exactly); it is 6.80% at $1/40$ and 0.85% at $1/4$.

Figure S.3 is the driven Q/V problem at the other two Table 4 ratios. Independent bisection of Q/V recovers `oc_ff_bisect` to 2.5×10^{-14} ($1/8$) and 9.6×10^{-14} ($1/5$); k_{eff}^2 from the driven pole/zero is 0.00805 and 0.01191. $C_0 = 6.66 \mu\text{F}$ at $1/8$ and $4.16 \mu\text{F}$ at $1/5$. Off-resonance Butterworth–van Dyke shape: $C_{\text{eff}}/C_0 = 1.019$ below the pole and 0.961 above the zero at $1/8$; 1.028 and 0.943 at $1/5$.

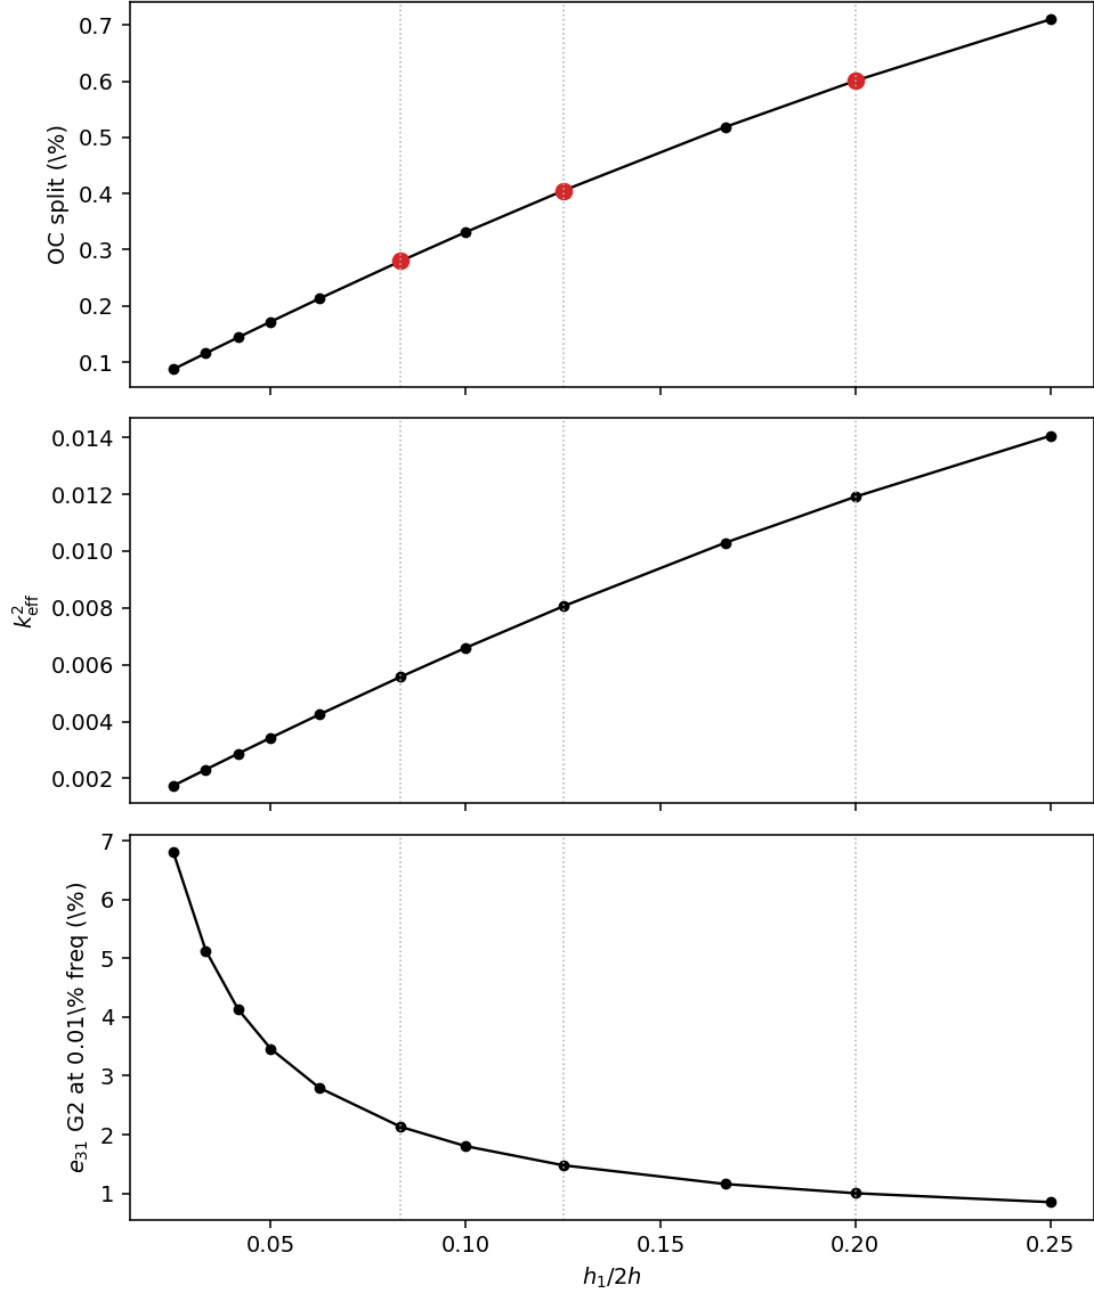


Figure S.2: Closed-form F-F $n = 0$ open-circuit split, k_{eff}^2 , and e_{31} G2 versus $h_1/2h$. Red markers are the three Duan Table 4 ratios already in the main text.

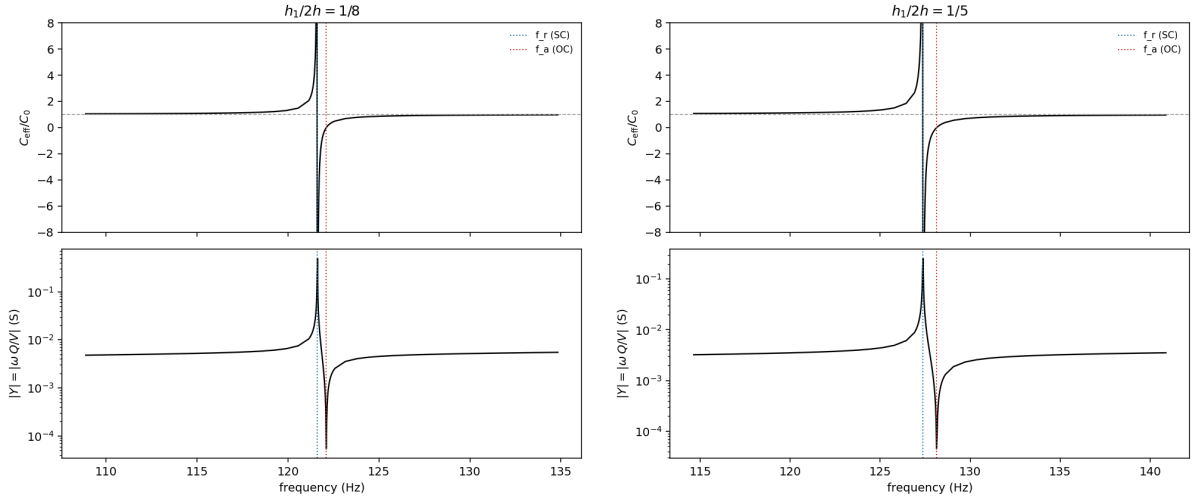


Figure S.3: Driven C_{eff}/C_0 and $|Y|$ at $h_1/2h = 1/8$ (left) and $1/5$ (right). Pole at the elastic/short-circuit root, zero at the open-circuit root, same linear-potential operator as main-text Fig. 4.

S.6 Cluster job provenance

All jobs on The Mill [5], solver snapshot 2026-07-10.s10. Piezoelectric paths are new and unused by the elastic default.

- 2489140 — clamped-clamped Table 4 gate, 27/27, worst -0.0476% .
- 2490706 — F-F coupling-off and outer-only-ground decks at $h_1/2h = 1/12$.
- 2490848 — F-F outer-only-ground at $h_1/2h = 1/8$ and $1/5$.
- 2491531 — clamped-clamped short-circuit inverse of E and e_{31} .
- 2491661 — F-F open-circuit python archival, deploy miss (package lacked the open-circuit method); superseded by 2491764.
- 2491761 — F-F open-circuit finite elements, mode 2 = 119.143 Hz.
- 2491764 — F-F open-circuit inverse archival, all gates passed.
- 2491831 — both-faces short-circuit finite elements, mode 2 = 118.811 Hz.
- 2491920 — driven $Y(\omega)$ archival, all gates passed, $k_{\text{eff}}^2 = 0.005997133$.
- 2494216 — sequential E -then- e_{31} inverse archival at full `dps=100`, $h_1/2h = 1/12$; SENTINEL PASS_ALL, bit-identical to the in-sandbox validation run.
- 2494226 — F-F open-circuit and both-faces short-circuit finite elements at $h_1/2h = 1/8$ and $1/5$, cloned from 2491761/2491831.
- 2494665 — lever 8 mesh refinement, NDIV_ZP $2 \rightarrow 4$ on the fair OC/scboth pair at all three Table 4 ratios; splits unchanged.
- 2494667 — lever 2 $h_1/2h$ sweep archival, SENTINEL PASS_ALL, bit-identical to the in-sandbox run.
- 2494668 — lever 5 driven $Y(\omega)$ at $1/8$ and $1/5$ archival, SENTINEL PASS_ALL, bit-identical to the in-sandbox run.
- 2494669 — lever 9 first harmonic dump; MAPDL clean but `RF,AMPS` identically zero. Superseded by 2494863.
- 2494863 — lever 9 v2 harmonic Y at $1/12$, `RF,CHRG`; pole 118.79 Hz, zero 119.13 Hz.
- 2494864 — lever 3 other-constant inverses, SENTINEL PASS_ALL.
- 2494865 — lever 1 $n = 0$ overtones; one overtone in $(800, 4000) \text{ rad s}^{-1}$ ($+0.137\%$ split). Pre-registered bar of two overtones in that window not met.
- 2494945 — lever 1 wide scan $(800, 15000) \text{ rad s}^{-1}$, SENTINEL PASS_ALL; second overtone 8515.06 vs $8516.48 \text{ rad s}^{-1}$ ($+0.017\%$).
- 2494866 — lever 4 F-F E channel, SENTINEL PASS_ALL, 0.025% of E at 0.01% freq on both elastic and OC.

- 2495528 — lever 10 C–F / F–C mixed-edge archival, SENTINEL PASS_ALL, bit-identical to the in-sandbox `dps=60` run.
- 2495593 — optional C–F FE, clones of 2491761/2491831 with inner $U_X = U_Y = 0$ only. scboth 67.071 Hz, OC 67.245 Hz, +0.259% (98.9% of the consistent closed-form +0.262%; 92% of the Gauss-law +0.282%). Both RUN COMPLETED, 0 MAPDL errors.
- 2530336 — first submission of the three-dimensional $n \geq 1$ queue (§S.9); no deck ran (the cluster had retired the ANSYS 2024 R2 module that every earlier finite-element job used).
- 2530423 — three-dimensional $n \geq 1$ queue, ten SOLID226 decks, ANSYS 2025 R1, all RUN COMPLETED, 0 MAPDL errors, 0 warnings (§S.9).
- 2530553 — thin-limit first pass, five bare-steel SOLID186 decks ($t = 20, 10, 5$ mm), ANSYS 2025 R1, all RUN COMPLETED, 0 errors, 0 warnings (§S.9).
- 2530671 — thin-limit second pass, first submission; the $96 \times 288 \times 8$ decks exceeded the 64 GB memory request (in-core Block Lanczos, 67.8 GB) and were killed; the added $t = 10$ mm coarse deck completed.
- 2530784 — thin-limit second pass, $96 \times 288 \times 8$ at $t = 20, 10, 5$ mm, 100 GB; all RUN COMPLETED, 0 errors (§S.9).
- 2530987 — Liu solid-disk decks, first version (§S.10); both RUN COMPLETED, 0 errors. A displacement constraint on the central mesh hole blocked the $n = 1$ centre rotation and raised those modes by 2–7%; superseded by 2531012 and not used.
- 2531012 — Liu solid-disk decks with the hole free, SOLID226, ANSYS 2025 R1; both RUN COMPLETED, 0 errors (§S.10).
- 2495751 — lever 16 frequency-precision sweep, SENTINEL PASS_ALL, bit-identical to the in-sandbox run (F–F/C–F e_{31} uncertainty curve plus the Boeringa–McCune lab floor).

Consistent-projection rerun (2026-09-23). Every analytic job above (all but the finite-element jobs) used the Gauss-law closure of §S.1 and the outer-face charge arm. Every package-based probe was re-run unchanged against the corrected solver (default `projection='consistent'`; `projection='duan'` reproduces the jobs above bit-for-bit), with only the hard-coded open-circuit regression anchors of four probes moved to the new values. All pass (SENTINEL PASS_ALL), and every analytic number in this document and the main text is from that rerun. The rerun was done in-sandbox at the probes' production precision; it was not repeated on the cluster, because every earlier cluster archival run of these same probes reproduced its in-sandbox run bit-for-bit. The finite-element jobs are unchanged. Their decks, text outputs, manifests and queue logs are in `ansys/NewAnsys/` of the public code tree.

S.7 Mixed-edge C–F / F–C closed form

Paper 3 names inner then outer: C–F is clamped inner, free outer (`bc_inner='C'`, `bc_outer='F'` in `ring_disk.py`). Methods on `PiezoOutOfPlaneSolver`: `elastic_cf_det` / `elastic_fc_det`, `cf_coupled_det` / `fc_coupled_det`, `oc_cf_det` / `oc_fc_det`. The mixed-edge engine recovers the existing free–free and clamped–clamped determinants bit-exactly when both edges are set equal. Bare-host $n = 0$ roots match Paper 3's live Frobenius solver at relative 4.45×10^{-10}

(C–F, $410.074181 \text{ rad s}^{-1}$) and 2.28×10^{-10} (F–C, $873.221632 \text{ rad s}^{-1}$). In-sandbox SENTINEL PASS_ALL (probe_piezo_p4_cf_mixed_edge_2026-09-16.py, dps=60, 2026-09-23 consistent-projection rerun): C–F open-circuit +0.262%, $k_{\text{eff}}^2 = 0.00522$, e_{31} G2 2.28% at 0.01% frequency; F–C open-circuit +0.00538%, $k_{\text{eff}}^2 = 0.000108$. Inverse round-trip on C–F e_{31} is 4.0×10^{-9} . (Cluster archival job 2495528 confirmed the earlier closure’s +0.282% bit-for-bit.) Optional C–F FE job 2495593: scboth 67.071 Hz, OC 67.245 Hz, split +0.259% (98.9% of +0.262%; 92% of the earlier +0.282%), no 0 Hz rigid body, bending discriminator, 0 MAPDL errors. SOLVER_VERSION remains 2026-07-10.s10.

S.8 Frequency-precision sweep and lab noise floor

Table S.1 extends the two-column (0.01%, 0.1%) e_{31} inverse of the main-text open-circuit section and §S.7 to an eight-point log-spaced grid of assumed relative frequency error, on both the free–free and clamped–free $n = 0$ open-circuit channels, using the identical linear-propagation formula (unchanged, not retuned): $\delta e_{31}/e_{31} = (\delta\omega/\omega)\omega_{\text{target}}/(|d\omega/de_{31}|e_{31,\text{true}})$. The lab-floor row (marked) is sourced from Table 3 of [4]: an HP4294A impedance analyzer and a scanning laser Doppler vibrometer measured the same five axial resonances of a free–free PZT-4 rod specimen (a physically distinct specimen from this ring, same material system), disagreeing by 0.12%, 0.10%, 0.09%, 0.11%, and 0.09% – mean 0.102%. The companion draft (BoeringaMcCune2026-2.pdf) was checked and rejected as a source: its impedance-versus-SLDV table is internally inconsistent (disagreements up to 26% on a single mode) and carries explicit placeholder text, so no number was taken from it.

Table S.1: Propagated relative uncertainty in e_{31} versus assumed relative frequency error, $h_1/2h = 1/12$. G0 round-trip error is 4.0×10^{-9} (bar 10^{-6}) at every row; G_anchor reproduces the 0.01% entries of main-text Table 4, and the 0.10%-scaled figures of §S.2, to within 1% relative; the linearity self-check (every row equal to the base row scaled by the ratio of assumed frequency errors) is exact to 10^{-9} .

assumed rel. freq. error	F–F OC unc. of e_{31}	C–F OC unc. of e_{31}
0.001%	0.213%	0.228%
0.003%	0.640%	0.683%
0.01%	2.133%	2.276%
0.03%	6.399%	6.829%
0.1%	21.331%	22.764%
0.102% (Boeringa–McCune floor [4])	21.758%	23.219%
0.3%	63.993%	68.291%
1%	213.311%	227.638%

Delivered as Paper4_Piezo/probe_piezo_p4_lever16_freq_noise_floor_2026-09-16.py (LF) with matching submit script (dps=60, mirroring the free–free/clamped–free probes’ own settings). In-sandbox SENTINEL PASS_ALL, ~ 85 s wall. Cluster archival job 2495751 (compute-34-04.mill, ~ 101 s wall, empty .err): SENTINEL PASS_ALL, every reported number bit-identical to the in-sandbox run (only per-call wall-clock timings differ). No package code was touched and SOLVER_VERSION remains 2026-07-10.s10.

S.9 Three-dimensional $n \geq 1$ finite-element check

SOLID226 (KEYOPT(1)=1001) for host and skins, three glued volumes, host with zero piezoelectric constants and relative permittivity 1, skins PZT-4 poled +z; millimetre–newton–second–tonne,

relative permittivity. Half ring $0 \leq \theta \leq \pi$, $U_Y = 0$ on $y = 0$: the $\cos n\theta$ family at every n , three rigid modes left. Electrical cases as in §S.3: coupling-off ($e_{ij} = 0$), both-faces short-circuit, and open-circuit (interfaces grounded, one coupled VOLT set on both outer faces). Meshes $24 \times 72 \times (2+1+1)$ and $40 \times 144 \times (4+2+2)$ (radial, circumferential, host and each skin). Circumferential order is read from a discrete cosine transform of U_Z at 13 angles on five radii; every scored mode has purity 1.0000. Coarse-to-fine changes are at most 0.025% in frequency and 0.2% in the short-circuit shift. ANSYS 2025 R1; every other finite-element job in §S.6 used 2024 R2, and the $n = 0$ coupling-off root agrees with the axisymmetric one to 0.0003%. Every quantity below is a ratio of raw MAPDL frequencies. Criteria were fixed before the run.

Table S.2: Three-dimensional finite elements (fine mesh) against the closed form, first radial root. Shift: short-circuit over coupling-off minus one (finite elements) and short-circuit 6×6 over elastic 4×4 minus one (closed form). Offset: coupling-off over the elastic bilayer minus one. Open-circuit minus short-circuit is below 1.4×10^{-10} relative at every $n \geq 1$.

$h_1/2h, n$	FE shift	closed-form shift	FE/closed -1	FE coupling-off (Hz)	offset
1/12, 0	7.245×10^{-6}	7.200×10^{-6}	+0.6%	118.8105	-0.198%
1/12, 1	6.874×10^{-6}	6.796×10^{-6}	+1.1%	276.6199	-1.022%
1/12, 2	1.454×10^{-6}	1.448×10^{-6}	+0.4%	72.3441	-0.533%
1/12, 3	1.918×10^{-6}	1.929×10^{-6}	-0.6%	172.2871	-0.647%
1/12, 4	2.414×10^{-6}	2.406×10^{-6}	+0.3%	301.9394	-0.935%
1/5, 0	7.352×10^{-5}	7.304×10^{-5}	+0.7%	127.0378	-0.262%
1/5, 1	6.965×10^{-5}	6.879×10^{-5}	+1.2%	295.4942	-1.192%
1/5, 2	1.479×10^{-5}	1.472×10^{-5}	+0.5%	77.4742	-0.604%
1/5, 3	1.948×10^{-5}	1.960×10^{-5}	-0.6%	184.4153	-0.753%
1/5, 4	2.452×10^{-5}	2.444×10^{-5}	+0.4%	322.9683	-1.097%

Against the pre-registered criteria: the axisymmetric control, mesh convergence, the open-circuit/short-circuit coincidence at $n \geq 1$, and the shift ($\pm 10\%$, all ten within $\pm 1.2\%$) pass. The elastic offset criterion, $|\text{offset}| \leq 1\%$ at $n = 1-4$, fails at three of eight points (1/12 $n = 1$; 1/5 $n = 1$ and 4). It was set on the assumption that the offset would grow from its $n = 0$ value with frequency alone; the $n \geq 1$ points instead carry an extra -0.2% to -0.46% beyond a plane-wave transverse-shear and rotary-inertia estimate, which accounts for the $n = 0$ offset. The retired Q_r free-edge row is 10.5% off the finite elements at 1/12, $n = 1$.

Thin-limit follow-up. To separate thickness physics from an n -dependent error in the thin-plate operator, the same half ring was run as bare steel ($E = 200$ GPa, $\nu = 0.3$, no skins) at full thickness $t = 20, 10$ and 5 mm (SOLID186, full integration). Kirchhoff roots scale exactly with t , so any offset that survives $t \rightarrow 0$ is an operator error. Each thickness was run on three uniformly refined meshes, $24 \times 72 \times 2$, $48 \times 144 \times 4$, and $96 \times 288 \times 8$ (the last 2.93×10^6 equations), and each root was Richardson-extrapolated with its observed order p . Table S.3 gives the mesh-extrapolated $\delta_n(t) = f_{\text{FE}}/f_K - 1$ and the intercept c of the quadratic $\delta = c + at + bt^2$ through the three thicknesses.

Criteria were fixed before each run. A first pass on the two coarser meshes was formally unresolved: its coarse-to-fine change at $t = 5$ mm exceeded the 0.05% bar at three orders, so its intercept (then +0.004% to +0.055%) was not scored. The second pass added the finest mesh and required monotone ratio-2 convergence with $1 \leq p \leq 8$ at every thickness and order (met at all fifteen points), took the intercept from the Richardson limits in that case, and required $|c| \leq 0.03\%$ at $n = 0-4$: all five pass, with $|c_\infty| \leq 0.014\%$. A separate criterion, fine-to-finest change at most 0.02%, fails at two points ($t = 5$, $n = 1$ and 4: 0.023% and 0.024%) and does not enter the intercept by the pre-registered rule. Convergence is monotone from above, so the finest-mesh intercept c_x

Table S.3: Bare steel annulus, first radial root, Richardson-extrapolated mesh limit. c_∞ : quadratic extrapolation to $t = 0$; c_x : the same from the finest mesh without Richardson; at , bt^2 at $t = 20$ mm; p : observed convergence order at $t = 5$ mm.

n	$t = 20$	$t = 10$	$t = 5$	c_∞	c_x	at	bt^2	p
0	-0.158%	-0.040%	-0.010%	-0.000%	+0.000%	-0.000%	-0.158%	3.3
1	-0.918%	-0.361%	-0.161%	-0.014%	+0.013%	-0.481%	-0.422%	1.5
2	-0.490%	-0.223%	-0.111%	-0.013%	+0.009%	-0.363%	-0.114%	1.5
3	-0.583%	-0.236%	-0.106%	-0.005%	+0.009%	-0.346%	-0.231%	1.9
4	-0.836%	-0.320%	-0.137%	-0.004%	+0.012%	-0.434%	-0.398%	2.1

and the Richardson intercept c_∞ bracket the limit; both are within 0.015% of zero at every order. An operator error of the size of the $n \geq 1$ excess in the main text would have given c of -0.2% to -0.46% . The $n = 0$ offset is quadratic in t to three figures (ratios 3.99 and 3.97 per halving). At $n \geq 1$ the fitted linear term is as large as or larger than the quadratic one, the signature of a free-edge boundary layer rather than interior shear alone. The finest $t = 5$ deck printed one Block Lanczos ill-conditioning warning (test residual 3.3×10^{-3} at the -1 Hz shift); its roots continue the monotone sequence of the two coarser meshes, and no other deck printed a warning or an error.

S.10 Liu 2002 solid-disk short-circuit CPT

Liu, Wang and Quek [2] tabulated free-vibration frequencies of a steel circular plate (no hole) with identical thickness-polarized PZT-4 skins on both faces, both faces of each skin short-circuited. Only their classical-plate column x_{kir} is scored here; their Mindlin and three-dimensional finite-element columns are not. Geometry of their Tables 2 and 6: $r_0 = 0.6$ m, host half-thickness $h = 0.01$ m, skin thickness $h_1 = 0.002$ m ($r_0/h = 60$); materials as their Table 1, with $e_{31} = +4.1$ C m $^{-2}$ as in the main text.

The solid disk has its own determinant. Keeping only the centre-regular Bessel function of each of the three χ -branches of Section S.1 gives a 3×3 ; its rows are $w = w' = 0$ (outer edge clamped, Liu’s Tables 2–5) or $w = M_r = 0$ (simply supported, Tables 6–9), each with the short-circuit row $\phi' = 0$. The annular 6×6 evaluated at $r_i = 0$ is not this determinant, because its Y_n and K_n columns are singular there, and the annular solver refuses $r_i \leq 0$. With $h_1 = 0$ the disk reduces to the 2×2 on $\{J_n, I_n\}$ of McCune and Stutts [3], and it reproduces their λ^2 for $n = 0, 1, 2$, $m = 1, 2$, under both edge conditions, to 5×10^{-6} . Roots were located by sampling the determinant on a uniform grid (800 points from 50 rad s $^{-1}$ to 8000 (clamped) or 7000 (simply supported)) and bisecting every sign change at 100 digits; no published value placed a bracket. The first two roots of each n are the six modes of each table, with no extra or missing root in the window.

Tables S.4 and S.5 give the result. All twelve roots agree with x_{kir} to better than 1×10^{-4} . All lie slightly below it (by 4×10^{-7} to 9×10^{-5}), which for the higher modes exceeds the rounding of Liu’s printed values; the reference model or its constants differ from ours at that level.

This comparison does not test the electromechanical coupling. On this geometry, reducing e_{31} from 4.1 to 0.01 C m $^{-2}$ moves every root by less than 4×10^{-5} , and replacing the projection of Section S.1 by the Duan-type closure of [1] moves it by less than 4×10^{-6} , so the tables cannot tell the two apart. What the tables do confirm is the solid-disk determinant, both outer edge rows, and the laminate stiffness and inertia on a geometry other than the ring of the main text. Script and output: `validation/paper4_piezo/probe_piezo_p4_liu_disk_gate2_2026-09-24.py`.

A three-dimensional finite-element model of the same disk (SOLID226 piezoelectric bricks, both faces of each skin grounded, half model, one mesh of 6912 elements with a free central hole of radius

3 mm, 0.5% of r_0) reproduces Liu’s ABAQUS column for all twelve modes within the pre-registered 0.6%: from +0.22 to +0.51% for the clamped edge and from -0.02 to +0.31% for the simply supported one. Like theirs, it lies below the classical-plate roots, by 0.03 to 2.0% growing with mode order, which is the thickness effect at $r_0/h = 60$. This checks the finite-element pipeline used elsewhere in this paper against an independent code; it is not a test of the classical-plate roots (job 2531012, §S.6; decks and scorer in `ansys/NewAnsys/ansys_p4_liudisk2_*`).

Table S.4: Liu Table 2 (outer edge clamped, short-circuit), $r_0/h = 60$: our roots ω against Liu’s classical-plate column x_{kir} (rad/s).

n	m	ω (this work)	x_{kir} (Liu)	$\omega/x_{\text{kir}} - 1$
0	1	902.4165	902.5	-9.25×10^{-5}
1	1	1878.0404	1878.2	-8.50×10^{-5}
2	1	3080.8681	3081.1	-7.53×10^{-5}
0	2	3513.1902	3513.4	-5.97×10^{-5}
1	2	5373.3097	5373.7	-7.26×10^{-5}
2	2	7471.6208	7472.1	-6.41×10^{-5}

Table S.5: Liu Table 6 (outer edge simply supported, short-circuit), $r_0/h = 60$: our roots ω against Liu’s classical-plate column x_{kir} (rad/s).

n	m	ω (this work)	x_{kir} (Liu)	$\omega/x_{\text{kir}} - 1$
0	1	435.5998	435.6	-4.20×10^{-7}
1	1	1227.4015	1227.5	-8.03×10^{-5}
2	1	2262.2762	2262.4	-5.47×10^{-5}
0	2	2625.0503	2625.2	-5.70×10^{-5}
1	2	4282.1310	4282.4	-6.28×10^{-5}
2	2	6193.5412	6193.9	-5.79×10^{-5}

References

- [1] W.H. Duan, S.T. Quek, Q. Wang, “Free vibration analysis of piezoelectric coupled thin and thick annular plate,” *J. Sound Vib.* 281 (2005) 119–139.
- [2] X. Liu, Q. Wang, S.T. Quek, “Analytical solution for free vibration of piezoelectric coupled moderately thick circular plates,” *Int. J. Solids Struct.* 39 (2002) 2129–2151. [https://doi.org/10.1016/S0020-7683\(02\)00079-3](https://doi.org/10.1016/S0020-7683(02)00079-3).
- [3] G. McCune, D. Stutts, “Exact radial-determinant frequencies of annular and circular plates: the closed-ring and solid-disk limits of the sector wave-function method,” submitted (2026).
- [4] Z.L. Boeringa, G.H. McCune, D.S. Stutts, “Canonical validation and model discrimination in a linearly tapered non-uniform rod,” unpublished manuscript (2026).
- [5] Missouri University of Science and Technology, “The Mill HPC Cluster,” *The Mill* (2024), Article 1. <https://scholarsmine.mst.edu/the-mill/1>.