





- RoHS compliant
- Toroidal construction
- Up to 7.6A loc
- Inductance range from 10µH to 1.0mH
- Low EMI
- UL 94V-0 packaging materials
- Low DC resistance

### **PRODUCT OVERVIEW**


The 3300 series is a range of through-hole power inductors. Due to the toroidal construction, they exhibit a very low EMI as stray flux is kept to a minimum. Typical applications include switching regulators, and power line filtering.


SELECTION GUIDE								
Order Code	Inductance, L	DC Current <sup>2</sup>	DC Resistance	Q @ f MHz		SRF	Package Weight	
	±15%	Max.	Max.	Nom.		Тур.	Тур.	
	μΗ	Α	mΩ	Q	f	MHz	g	
33100C	10	7.60	20	3.4	1.0	68	20.8	
33150C	15	6.20	27	3.3	1.0	49	21.3	
33220C	22	5.10	33	3.4	1.0	37	21.5	
33330C	33	4.20	40	3.5	1.0	24	22.0	
33470C	47	3.50	48	3.4	1.0	17	22.5	
33680C	68	2.90	57	3.5	1.0	16	22.9	
33101C	100	2.40	70	3.9	8.0	9.7	23.7	
33151C	150	2.00	84	3.8	8.0	7.2	24.9	
33221C	220	1.60	102	3.2	0.8	2.0	26.1	
33331C	330	1.30	126	3.4	8.0	1.9	27.8	
33471C	470	1.10	152	2.6	8.0	1.4	29.5	
33681C	680	0.92	183	0.64	8.0	0.9	31.5	
33102C	1000	0.76	221	0.85	8.0	0.7	34.0	

ABSOLUTE MAXIMUM RATINGS				
Operating temperature range	-40°C to 125°C			
Storage temperature range	-40°C to 125°C			

SOLDERING INFORMATION <sup>1</sup>				
Peak wave solder temperature	260°C			
Pin finish	Tin			

### **PACKAGE SPECIFICATIONS Mechanical Dimensions** — 29.0 (1.14) Max. – 0.75 (0.030) 24.0 (0.945) 31.0 (1.22) Max. 16.30±0.5 3.07 (0.121) $(0.642\pm0.020)$ 33330C 309 muRata Ps 20.32 (0.8) -- 10.16±0.3 (0.4±0.012) 0.75 (0.030) 4.1±0.5 (0.161±0.020) Package weight: See selection guide





**Packaging** 


Supplied in trays (40 pieces per tray)





Specifications typical at  $T_{\Delta} = 25^{\circ}C$ 

- 1 For further information, please visit www.murata-ps.com/rohs
- 2 The maximum DC current is the value at which the inductance falls to 75% of its nominal value or when its temperature rise reaches 40°C, whichever is sooner.

**Vertical Mount Toroidal Inductors** 

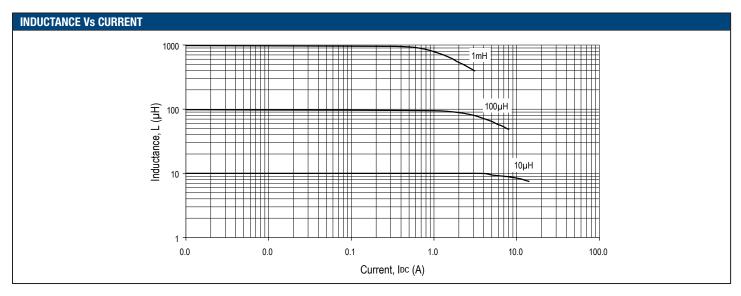

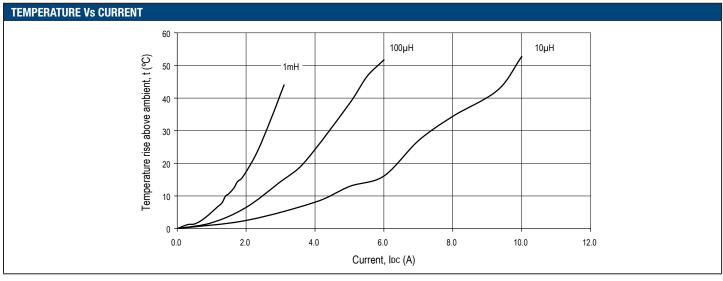

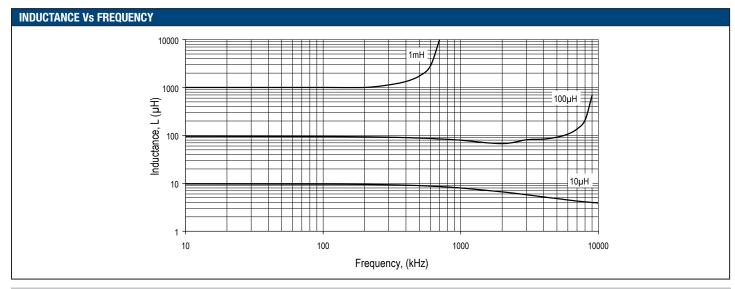



# 3300 Series

**Vertical Mount Toroidal Inductors** 

Murata Power Solutions, Inc.
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. ISO 9001 and 14001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are upon better to change without notice.

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

### Murata:

<u>33680C</u> <u>33151C</u> <u>33331C</u> <u>33102C</u> <u>33220C</u> <u>33330C</u> <u>33471C</u> <u>33150C</u> <u>33221C</u> <u>33470C</u> <u>33100C</u> <u>33101C</u> 33681C