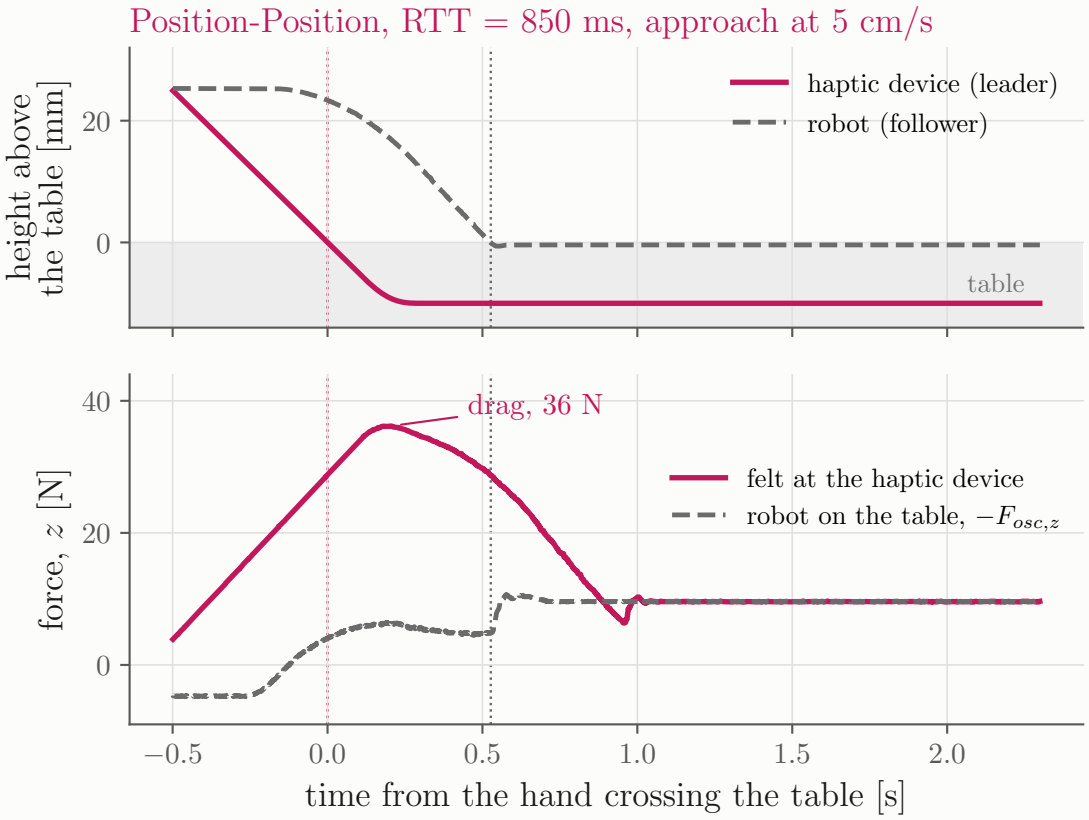

Position-Position, RTT = 850 ms, approach at 5 cm/s
height above the table [mm]
20
0
haptic device (leader)
robot (follower)
table
drag, 36 N
force, z [N]
40
20
0
felt at the haptic device
robot on the table, $-F_{osc,z}$
−0.5
0.0
0.5
1.0
1.5
2.0
time from the hand crossing the table [s]