Studio wall and roof framing review

ROOF SUPPORT AND WALL LINES

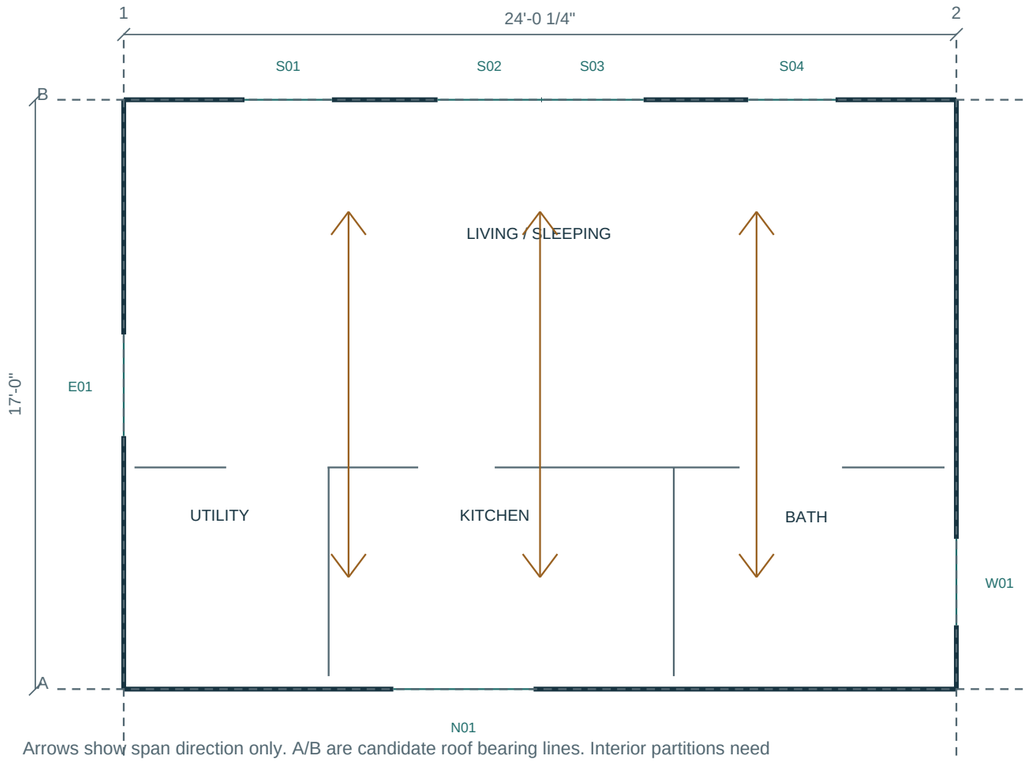

Arrows show span direction only. A/B are candidate roof bearing lines. Interior partitions need EOR review before use as supports. Verify truss seats, bracing, penetrations and mechanical loads.

Low shed. Slope and standing-seam assembly subject to engineering and product limits.

SITE ASSEMBLY INTERFACES

I1 / FOUNDATION

Survey control and slab edges, flush or raised threshold, bearing and leveling, anchor embedment/edge distance, corrosion break and hold-down reactions.

I2 / PANEL SEAMS

EOR and supplier set breaks, straps or splice continuity, screw access, sheathing continuity and temporary erection bracing.

I3 / ROOF AND OPENINGS

Design headers, jambs, sills and their load paths. Coordinate truss bearing, uplift clips, diaphragm edges, collectors, opening flashings and service penetrations.

I4 / RELEASE

Confirm sizes, grade, thickness, coatings, connectors, spacing, weld/screw criteria, approved shop drawings and field inspection plan.

EXTERIOR WALL ELEVATION STRIPS

Vertical positions diagrammatic. Paired glazing and door need supplier assembly RO. Thin amber lines mark jamb coordination only.

T / SOUTH | STATION DIRECTION AS PLAN



B / NORTH | STATION DIRECTION AS PLAN

R / WEST | STATION DIRECTION AS PLAN

L / EAST | STATION DIRECTION AS PLAN



Track, studs, headers and jambs require engineered sections and attachment. Panel boundaries, member spacing and lateral elements remain TBD. See opening sheet for horizontal station chains and nominal sizes.

Parkview wall and roof framing review

ROOF SUPPORT AND WALL LINES

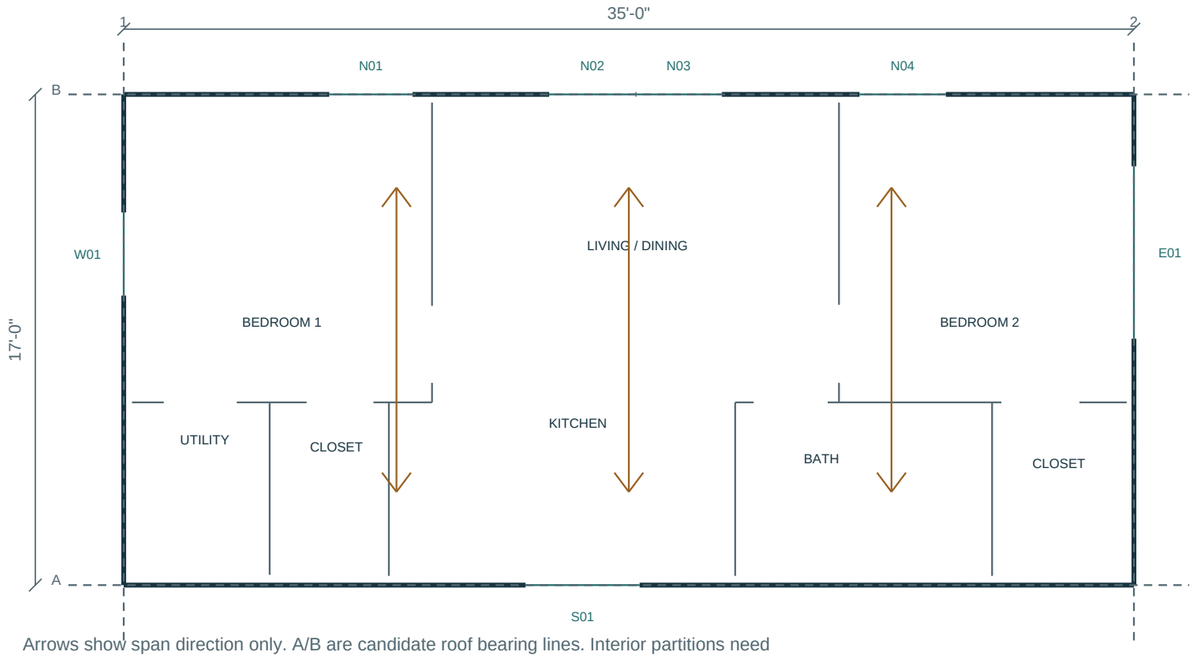

Arrows show span direction only. A/B are candidate roof bearing lines. Interior partitions need EOR review before use as supports. Verify truss seats, bracing, penetrations and mechanical loads.

Low shed. Source shows 0.35:12; confirm a listed roof assembly or revise slope.

SITE ASSEMBLY INTERFACES

I1 / FOUNDATION

Survey control and slab edges, flush or raised threshold, bearing and leveling, anchor embedment/edge distance, corrosion break and hold-down reactions.

I2 / PANEL SEAMS

EOR and supplier set breaks, straps or splice continuity, screw access, sheathing continuity and temporary erection bracing.

I3 / ROOF AND OPENINGS

Design headers, jambs, sills and their load paths. Coordinate truss bearing, uplift clips, diaphragm edges, collectors, opening flashings and service penetrations.

I4 / RELEASE

Confirm sizes, grade, thickness, coatings, connectors, spacing, weld/screw criteria, approved shop drawings and field inspection plan.

EXTERIOR WALL ELEVATION STRIPS

Vertical positions diagrammatic. Paired glazing and door need supplier assembly RO.
Thin amber lines mark jamb coordination only.

T / NORTH | STATION DIRECTION AS PLAN

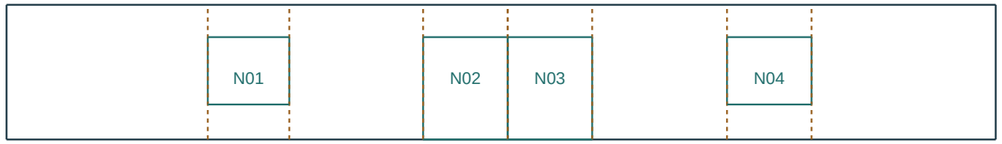

B / SOUTH | STATION DIRECTION AS PLAN

R / EAST | STATION DIRECTION AS PLAN

L / WEST | STATION DIRECTION AS PLAN



Track, studs, headers and jambs require engineered sections and attachment. Panel boundaries, member spacing and lateral elements remain TBD. See opening sheet for horizontal station chains and nominal sizes.

Haven wall and roof framing review

ROOF SUPPORT AND WALL LINES

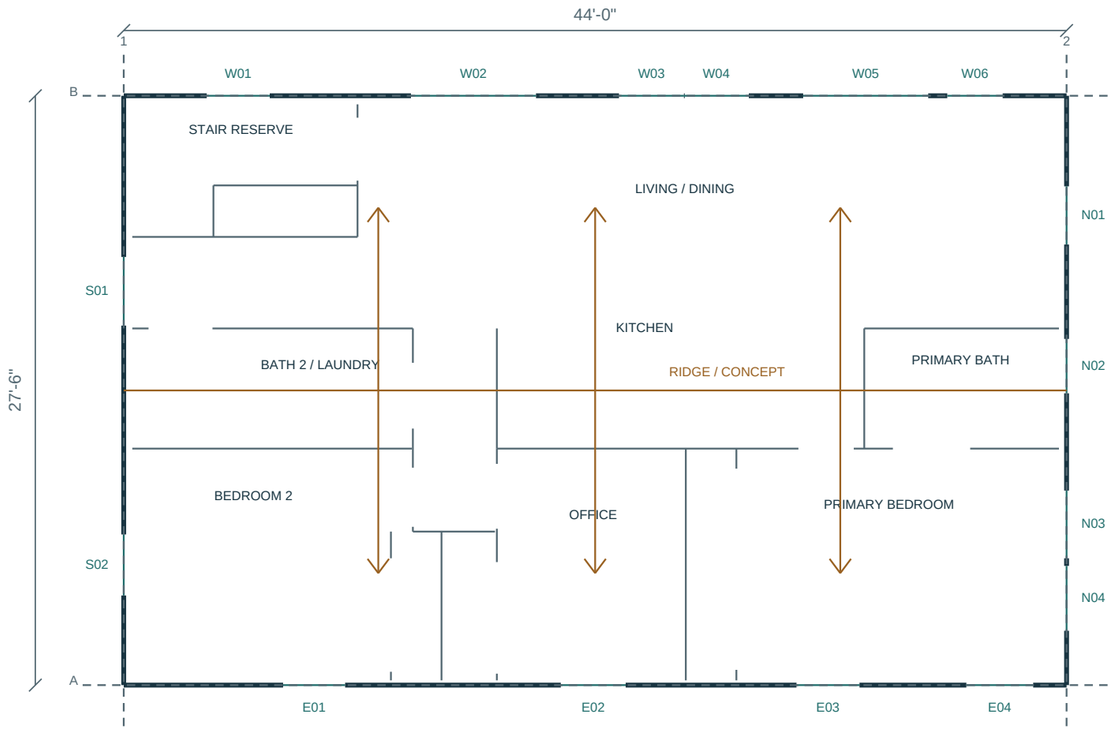

Arrows show span direction only. A/B are candidate roof bearing lines. Interior partitions need EOR review before use as supports. Verify truss seats, bracing, penetrations and mechanical loads.

Low gable. Source elevation shows 1.2:12; assembly to be verified.

SITE ASSEMBLY INTERFACES

I1 / FOUNDATION

Survey control and slab edges, flush or raised threshold, bearing and leveling, anchor embedment/edge distance, corrosion break and hold-down reactions.

I2 / PANEL SEAMS

EOR and supplier set breaks, straps or splice continuity, screw access, sheathing continuity and temporary erection bracing.

I3 / ROOF AND OPENINGS

Design headers, jambs, sills and their load paths. Coordinate truss bearing, uplift clips, diaphragm edges, collectors, opening flashings and service penetrations.

I4 / RELEASE

Confirm sizes, grade, thickness, coatings, connectors, spacing, weld/screw criteria, approved shop drawings and field inspection plan.

EXTERIOR WALL ELEVATION STRIPS

Vertical positions diagrammatic. Paired glazing and door need supplier assembly RO.
Thin amber lines mark jamb coordination only.

T / WEST | STATION DIRECTION AS PLAN

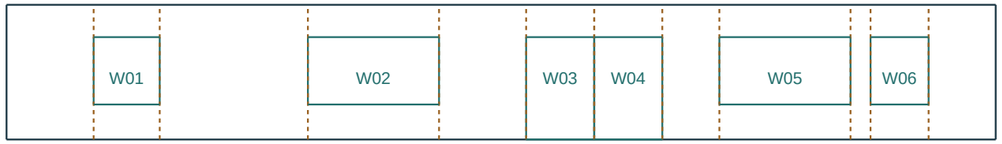

B / EAST | STATION DIRECTION AS PLAN

R / NORTH | STATION DIRECTION AS PLAN

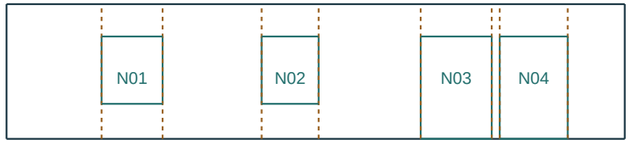

L / SOUTH | STATION DIRECTION AS PLAN

Track, studs, headers and jambs require engineered sections and attachment. Panel boundaries, member spacing and lateral elements remain TBD. See opening sheet for horizontal station chains and nominal sizes.